




Ck040d

# Quick Connect Couplings

# LARWIND

# CUPLA

**Cuplas Enable Flexible, Fast, and Secure Connections in Various Fluid Lines.**

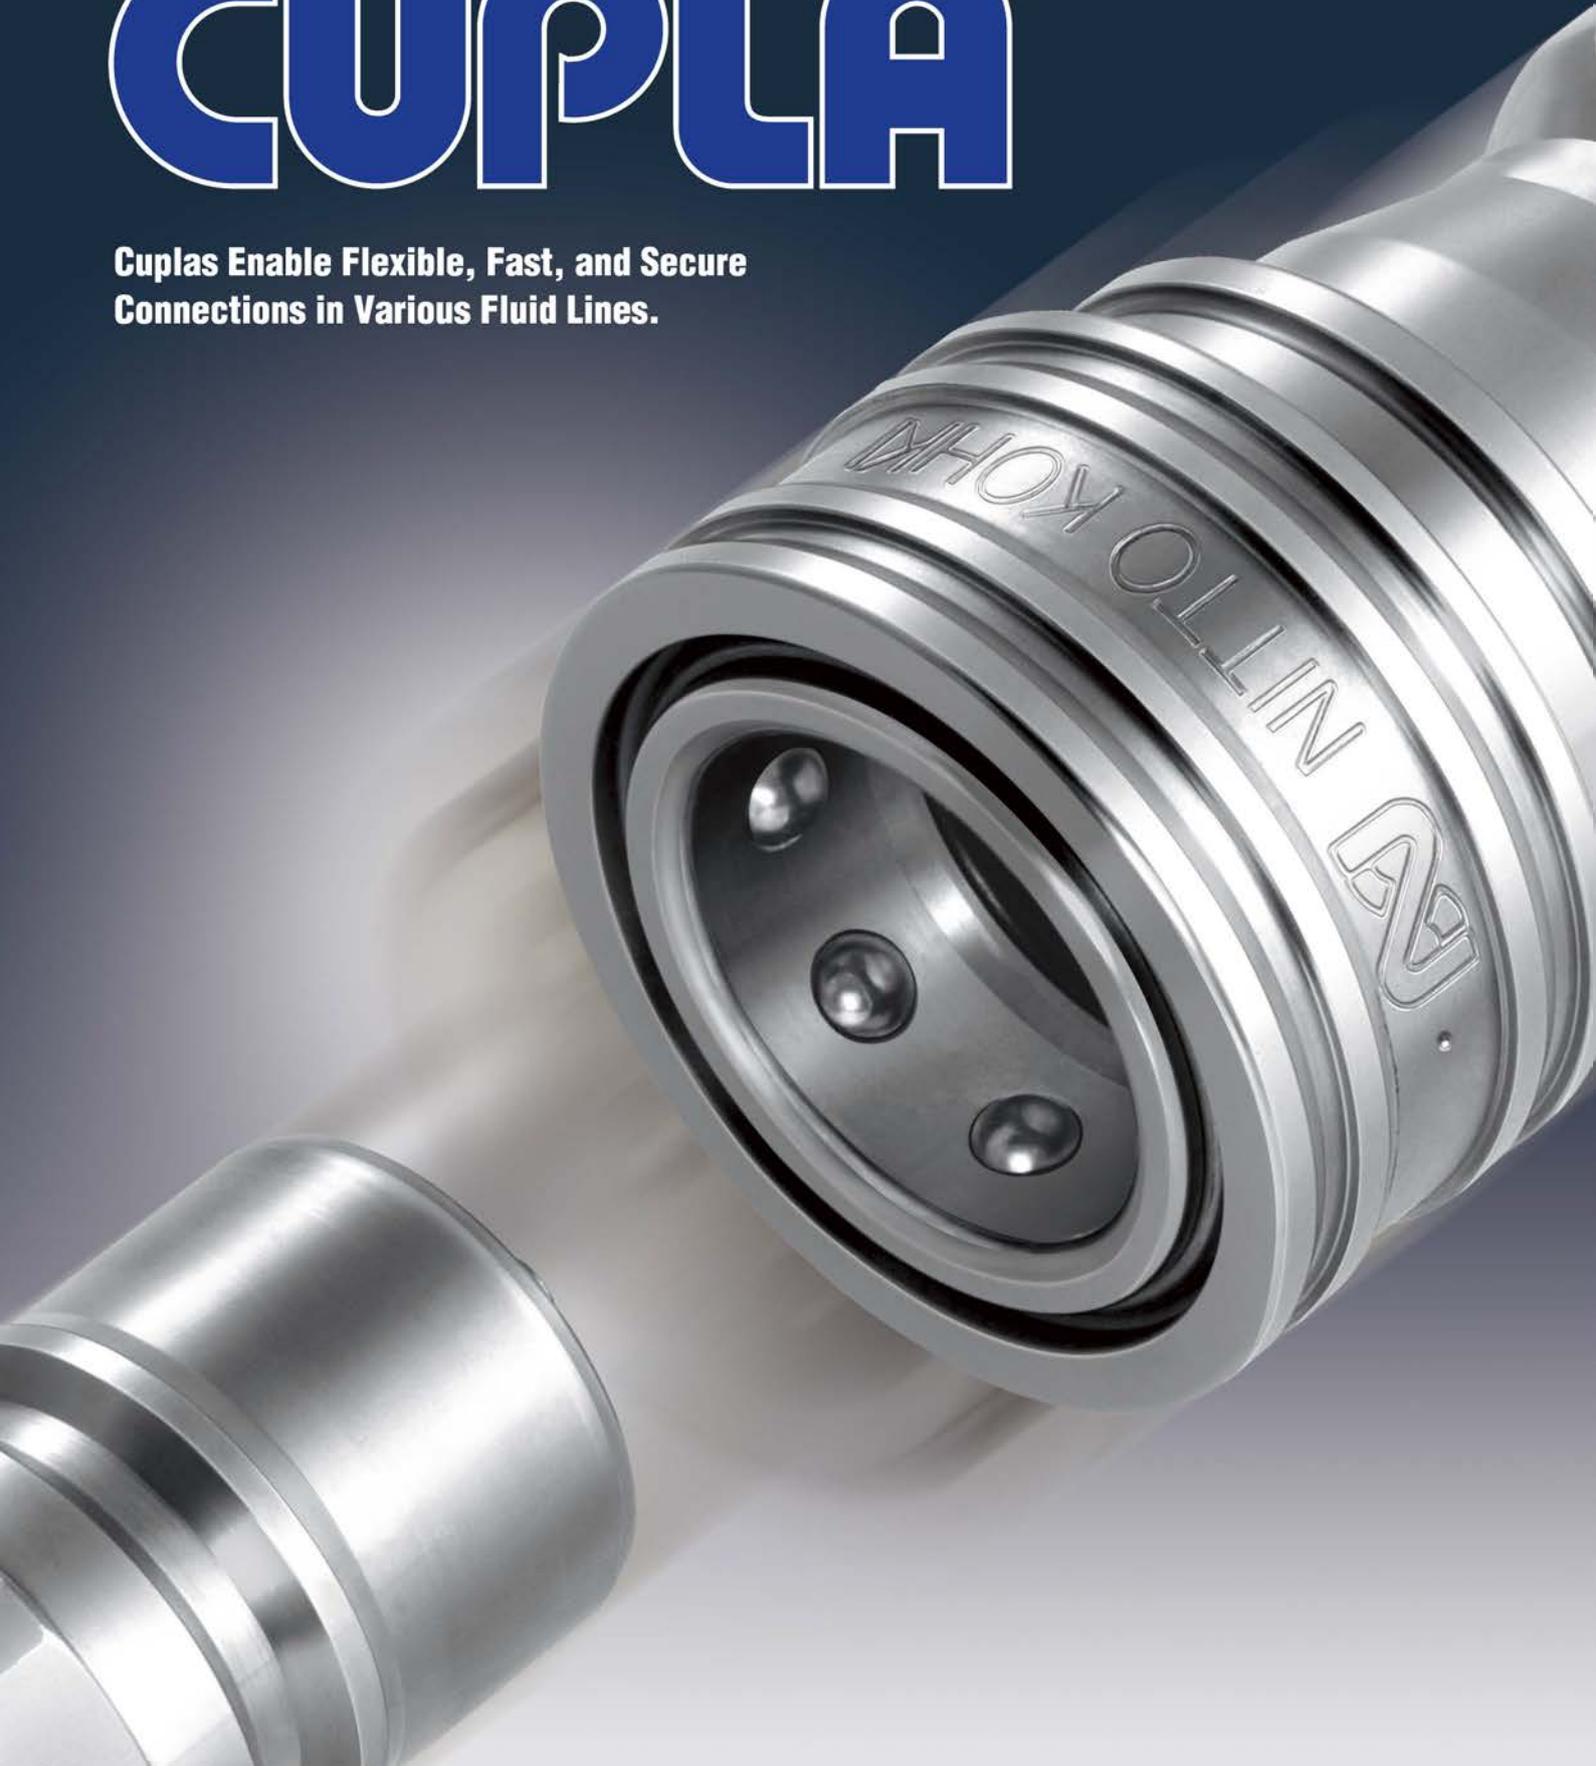

## Contents

|  |         |
|--|---------|
| Contents / Features and Applications of Cuplas .....   | 1 to 2  |
| Select an Appropriate Cupla for the Job .....          | 3       |
| Glossary .....   | 4       |
| Guide for Selecting "NITTO" Standard Cuplas .....      | 5 to 12 |
| Semi-standard Cupla Series and Cupla Accessories ..... | 13      |
| Special Made-to-Order Cuplas .....                     | 14      |
| Cupla Quality Control .....                            | 15      |

### Standard Cupla Series

|   |           |  |            |
|---|-----------|--|------------|
| <b>Micro Cupla</b>                              | <b>17</b> | <b>Mold Cupla</b>                        | <b>63</b>  |
| <b>Micro Cupla with Tube Fitter</b>             | <b>17</b> | <b>Mold Cupla High Flow Type</b>         | <b>65</b>  |
| <b>Micro Cupla Stainless Steel</b>              | <b>20</b> | <b>Flow Meter</b>                        | <b>66</b>  |
| <b>Small Cupla</b>                              | <b>21</b> | <b>Lever Lock Cupla Metal Body</b>       | <b>67</b>  |
| <b>Compact Cupla</b>                            | <b>23</b> | <b>Lever Lock Cupla Plastic Body</b>     | <b>67</b>  |
| <b>Cube Cupla</b>                               | <b>25</b> | <b>TSP Cupla</b>                         | <b>71</b>  |
| <b>Super Cupla</b>                              | <b>27</b> | <b>TSP Cupla with Ball Valve</b>         | <b>73</b>  |
| <b>Super Cupla with Tube Fitter</b>             | <b>27</b> | <b>SP Cupla Type A</b>                   | <b>75</b>  |
| <b>Hi Cupla</b>                                 | <b>29</b> | <b>Zerospill Cupla</b>                   | <b>77</b>  |
| <b>Hi Cupla BL</b>                              | <b>31</b> | <b>HSP Cupla</b>                         | <b>79</b>  |
| <b>Hi Cupla 200</b>                             | <b>33</b> | <b>Hyper HSP Cupla</b>                   | <b>81</b>  |
| <b>Hi Cupla 200 with Tube Fitter</b>            | <b>33</b> | <b>210 Cupla</b>                         | <b>83</b>  |
| <b>Hi Cupla for Connection to Braided Hoses</b> | <b>35</b> | <b>HSU Cupla</b>                         | <b>85</b>  |
| <b>Nut Cupla</b>                                | <b>35</b> | <b>S210 Cupla</b>                        | <b>87</b>  |
| <b>Nut Cupla 200</b>                            | <b>35</b> | <b>280 Cupla</b>                         | <b>89</b>  |
| <b>Rotary Nut Cupla</b>                         | <b>35</b> | <b>350 Cupla</b>                         | <b>91</b>  |
| <b>Lock Cupla 200</b>                           | <b>37</b> | <b>Flat Face Cupla F35</b>               | <b>93</b>  |
| <b>Hi Cupla Two Way Type</b>                    | <b>38</b> | <b>Flat Face Cupla FF</b>                | <b>95</b>  |
| <b>Full-Blow Cupla</b>                          | <b>39</b> | <b>450B Cupla</b>                        | <b>97</b>  |
| <b>Purge Hi Cupla PVR Type</b>                  | <b>41</b> | <b>700R Cupla</b>                        | <b>98</b>  |
| <b>Purge Hi Cupla</b>                           | <b>43</b> | <b>Multi Cupla MAM Type</b>              | <b>99</b>  |
| <b>Purge Line Cupla</b>                         | <b>44</b> | <b>Multi Cupla MAM-B Type</b>            | <b>101</b> |
| <b>Rotary Line Cupla RT Type</b>                | <b>45</b> | <b>Multi Cupla MAM-A Type</b>            | <b>105</b> |
| <b>Rotary Line Cupla RE Type</b>                | <b>45</b> | <b>Multi Cupla MAS Type / MAT Type</b>   | <b>109</b> |
| <b>Line Cupla 200T Type</b>                     | <b>47</b> | <b>Multi Cupla MALS Type / MALT Type</b> | <b>110</b> |
| <b>Line Cupla 200L Type</b>                     | <b>47</b> | <b>Multi Cupla MALC-SP Type</b>          | <b>111</b> |
| <b>Line Cupla 200S Type</b>                     | <b>47</b> | <b>Multi Cupla MALC-HSP Type</b>         | <b>115</b> |
| <b>Rotary Full-Blow Line Cupla</b>              | <b>49</b> | <b>Semicon Cupla SP Type</b>             | <b>119</b> |
| <b>Hi Cupla Ace</b>                             | <b>51</b> | <b>Semicon Cupla SCS Type</b>            | <b>120</b> |
| <b>Rotary Plug</b>                              | <b>53</b> | <b>Semicon Cupla SCY Type</b>            | <b>121</b> |
| <b>Twist Plug</b>                               | <b>54</b> | <b>Semicon Cupla SCT Type</b>            | <b>122</b> |
| <b>Purge Plug</b>                               | <b>55</b> | <b>Semicon Cupla SCAL Type</b>           | <b>123</b> |
| <b>Anti-vibration Plug Hose</b>                 | <b>56</b> | <b>Semicon Cupla SCF Type</b>            | <b>124</b> |
| <b>Duster Cupla</b>                             | <b>57</b> | <b>Paint Cupla</b>                       | <b>125</b> |
| <b>NK Cupla Hose</b>                            | <b>58</b> | <b>SP-V Cupla</b>                        | <b>127</b> |
| <b>NK Cupla Coil Hose</b>                       | <b>58</b> | <b>PCV Pipe Cupla</b>                    | <b>129</b> |
| <b>Mini Cupla</b>                               | <b>59</b> |  |            |
| <b>Mini Cupla Super</b>                         | <b>61</b> |  |            |

### Semi-Standard Cupla Series

|  |            |                                |            |
|--|------------|--------------------------------|------------|
| <b>Cupla with Single Lock</b>                  | <b>131</b> | <b>High Flow Cupla</b>         | <b>133</b> |
| <b>Cupla with Safety Lock</b>                  | <b>131</b> | <b>High Flow Cupla BI Type</b> | <b>134</b> |
| <b>Two-way Shut-off Type Small Size Cuplas</b> | <b>132</b> | <b>Plastic Cupla BC Type</b>   | <b>135</b> |
| <b>TSP-HP Cupla for High Pressure</b>          | <b>132</b> | <b>Plastic Cupla BCC Type</b>  | <b>135</b> |

### Accessories (136 to 139)

|  |            |
|--|------------|
| Seal Material Selection Table for Reference .....                          | 141 to 143 |
| Body Material Selection Table .....  | 144        |
| Unit Conversion Tables .....   | 145        |
| Cupla Inquiry Form .....   | 146        |
| Taper Pipe Threads .....   | 147        |
| Hi Cupla Series Interchangeability .....                                   | 148        |
| Production Facilities That Assure Our Product Quality .....                | 149        |
| From Development to Production, Management and Marketing of "Cuplas" ..... | 150        |
| Nitto Kohki's Laborsaving Products .....                                   | 151        |
| Safety Guide / Maintenance of Cuplas .....                                 | 152 to 156 |

## Quick Connect Couplings

# CUPLA



# Cuplas Enable Flexible, Fast, and Secure Connections in Various Fluid Lines.

Nitto Kohki's unique technologies and dedicated research have been proven by numerous patents, which led to the development of 25,000 different Cupla variations.

- Applications diversify from general household to high-tech industries such as in oceanic and space development.
- Numerous sizes are available for various needs.
- Wide varieties of body materials such as steel, brass, plastic, aluminum or stainless steel are available.

For easy replacements:

*Replacements of pneumatic / hydraulic tools, pneumatic / hydraulic cylinders, mold attachments, etc.*

For temporary installation in test line:

*Vacuum tests, pressure durability tests, leakage tests, running tests, etc.*

For filling:

*For filling up various industrial gases, including inert gases, nitrogen, LPG, carbon dioxide, oxygen, fuel gas, etc.*

For maintenance services:

*For computer cooling system, hydraulic cylinders in die-casting machines.*

For transfer:

*For transfer of solid items through pipes such as screws and nuts as well as for electric power cable lines.*

As joints:

*Applications other than fluid transfer covering connections for holding works while anchored or carried around.*

*A profusion of patented technology crystallized in global users recognition of high quality and high performance.*

## ISO 9001 and 14001 Certification Award

"Cuplas" quick connect couplings are produced as the crystallization of high-grade know-how nurtured in the fields of fluid engineering and materials engineering, and top level precision machining technology. Having assessed Nitto Kohki consistent quality assurance and control system ranging from design and development through procurement of material, manufacture, assembly, and shipping, the Japan Quality Assurance Foundation, authority for inspection and registration, awarded us "ISO 9001", international standard for quality management systems, and "ISO 14001", international standard for environment management systems intended to perform global environment preservation and pollution control. High reliability built on unparalleled "high quality" and accumulated history of "productivity" for stable supply. Cupla is receiving overwhelming support from many users spread all over the world as the top brand for fluid energy transmission and control.



ISO 14001  
JQA-EM4057  
NITTO KOHKI CO.,LTD.



ISO 9001  
JQA-2025  
NITTO KOHKI CO.,LTD.  
Couplings Division

# CUPLA

## Beware of imitations

Recently on the market, there have appeared similar products that invite misidentification or confusion with Nitto Kohki Cuplas, or such products that claim to have compatible mating parts. Nitto Kohki cannot accept responsibility for any accident that may result by mixed use with a coupling of another brand that seems connectable to a Nitto Kohki Cupla. Nitto Kohki Cuplas are produced with their own unique tolerances and precision under strict quality control, and are not interchangeable with other couplings that are not under such tolerances. Therefore, connection to other brand of coupling may end up with abrupt breakdown or personal injury. Please be sure to check for our marks below, which are always inscribed on Nitto Kohki Cupla products, when you order and purchase.




# Select an Appropriate Cupla for the Job

Nitto Kohki has the wide range of Cuplas covering almost every application and feature you need. In order to select an appropriate Cupla for your job, you need to realize the following specifications.

## Specifications to Be Checked When Selecting Cuplas

|  |   |  |
|--|---|--|
| <b>Fluid and the Temperature</b>           | <b>Select a Cupla with body and seal materials that suit the fluid and its temperature.</b> | There are different body and seal materials to suit different fluids. For example, we recommend steel Hi Cuplas for air, and brass or stainless steel for water. Please refer to Body Material Selection Table and Seal Material Selection Table at the end of this catalog for details about the correspondence between fluids and materials. |
| <b>Fluid Pressure</b>                      | <b>Select a Cupla suitable for the actual max. fluid pressure.</b>                          | Fluid pressure is also a key to Cupla selection. Each series of hydraulic Cuplas have different structures to cope with each pressure resistance ranges between 5.0 MPa (50 kgf/cm <sup>2</sup> ) and 68.6 MPa (700 kgf/cm <sup>2</sup> ).   |
| <b>Automatic Shut-off Valve</b>            | <b>Select a Cupla with a valve structure that suits the piping application.</b>             | Valve combinations are two-way shut-off, one-way shut-off, or straight through types. Choose carefully. Unless it is a two-way shut-off type, the internal fluid will flow out from the Cupla without valve when it is disconnected.   |
| <b>Operating Environment</b>               | <b>Select a Cupla with design and materials that suit each operating environment.</b>       | In choosing the type of Cupla, body material and seal material, consider the temperature range, possible dirt and dust, and/or corrosive atmosphere in the operating environment.  |
| <b>Size and Type of End Configurations</b> | <b>Finally and critically specify the size and type of end configurations.</b>              | Having checked the type and materials for the Cupla, now specify the size and type of end configurations to suit the type of piping. Choose carefully, as the size affects the fluid flow rate.  |



If you cannot find a suitable Cupla, please enter the above details in the "Cupla Inquiry Form" at the end of this catalog and send it to our distributor in your country or directly to Nitto Kohki by fax or post.

## Symbols

Quick reference symbols: 1) Type of valve structure, 2) Working pressure, 3) Applicable fluids, are given on each product page to help you to quickly select a suitable Cupla. Please use them as the guide to grasp each type selection.

### Valve structure

Plug Socket Valve

Two-way shut-off

Two-way shut-off (Non-Spill)

One-way shut-off

One-way shut-off

Straight through

### Working pressure

**1.0**

**1.0 MPa**  
(10 kgf/cm<sup>2</sup>)

### Applicable fluids

Air

Water

Hydraulic oil

Steam

Oxygen, Fuel Gas

Cooling water

Gas

Inert gas, Vacuum, Helium

High purity chemicals

Heated oil

Powder

Solvent based paint

# Glossary

The following terms are used in detailed information pages of Cuplas. Refer to these terms when checking Cupla specifications.

## International System of Units (SI Units)

Every unit stated in this catalog is based on SI Units. The old units, which are Non-SI Units, are also written within parentheses side by side with SI Units for reference only.

## Glossary

### The Meaning of Each Letter in the Model Name

The model name of a Cupla indicates its size, whether plug or socket, and the end configuration. Rated pressure is also shown for some hydraulic Cuplas. Check the following tables to understand the model name implication before making your selection.

**Model name (in case of Hi Cupla 200)**

**200 - 20 S H**

**Series name**

**End configuration \*2**

|         |           |             |               |
|---------|-----------|-------------|---------------|
| Symbol  | H         | M           | F             |
| Meaning | Hose barb | Male thread | Female thread |

**Plug or Socket**

|         |      |        |
|---------|------|--------|
| Symbol  | P    | S      |
| Meaning | Plug | Socket |

**Size \*1**

|                  |      |      |      |      |      |    |        |        |    |        |    |    |
|------------------|------|------|------|------|------|----|--------|--------|----|--------|----|----|
| Symbol           | 1    | 2    | 3    | 4    | 6    | 8  | 10     | 12     | 16 | 20     | 24 | 32 |
| Nominal diameter | 1/8" | 1/4" | 3/8" | 1/2" | 3/4" | 1" | 1 1/4" | 1 1/2" | 2" | 2 1/2" | 3" | 4" |

\*1: The digit numbers of models for some products differs from those of symbols. For example, in case of Hi Cupla 20SH, not "20" but only "2" of the "20" corresponds to "2" of the symbol and indicates the nominal diameter of 1/4".

\*2: For a product with only one type of end configuration, this symbol is omitted. For example, 210 Cuplas have only female threaded end so the model indicates only the size and plug or socket identification.

### Body material

This indicates the material that is used for the plug body or socket body that forms the flow path of fluid through the Cupla. Some products have internal components of a different material. Please check with us for details.

| Body Material   |       | Major applicable fluid |
|-----------------|-------|------------------------|
| Common name     | Mark  |                        |
| Brass           | BRASS | Air, Water, Oil        |
| Iron, Steel     | STEEL | Air, Oil               |
| Stainless steel | SUS   | Air, Water, Oil        |

Please refer to Page 144 for body material selection table.

### Size


This indicates the nominal size of the pipe thread connection or of the hose to be used.

### Working pressure

This shows the normal allowable fluid pressure under continuous use.


### Pressure Loss

This shows the loss of pressure when fluid runs through the Cupla set.

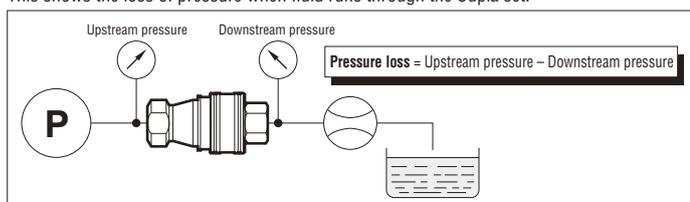

### Min. Cross-Sectional Area

This shows the minimum cross-sectional area of the fluid path when the Cupla is connected. The position is different in some products.

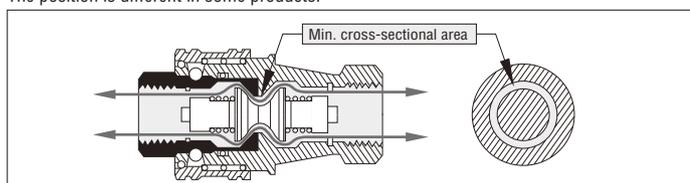

### Seal Material

This shows the material used to seal the Cupla, usually an O-ring. The standard material is nitrile butadiene rubber. For materials other than those shown below, please specify such as silicone (SI), butyl (IIR), Kalrez (KL) or rubber for food, depending on your application.

#### • Properties of rubbers used for O-rings

| Seal material               |              | Working Temperature Range | Features  |
|-----------------------------|--------------|---------------------------|---|
| Common name                 | Nitto symbol |                           |   |
| Nitrile rubber              | NBR (SG)     | -20°C to +80°C            | Standard seal with excellent oil resistance.  |
| Hydrogenated nitrile rubber | HNBR         | -20°C to +120°C           | Compared with the standard nitrile rubber, the seal material is more heat and weather resistant.  |
|                             | HNBR (H708)  | -20°C to +120°C           | In addition to the above features, the seal material can also be used for refrigeration oil and refrigerant applications such as HFC-134a. (The seal material is employed only in SP-V Cupla and PCV Pipe Cupla.) |
| Fluoro rubber               | FKM (X-100)  | -20°C to +180°C           | Excellent for heat, weather, and oil resistance. Applicable to wide range of applications.  |
| Chloroprene rubber          | CR (X-306)   | -20°C to +80°C            | Excellent weather resistance.   |
|                             | CR (C308)    | -20°C to +80°C            | In addition to the above features, the seal material can also be used for refrigeration oil and refrigerant applications such as HFC-134a.  |
| Ethylene-propylene rubber   | EPDM (EPT)   | -40°C to +150°C           | Excellent resistance to steam and hot water, also excellent resistance to weather and ozone.  |
| Perfluoroelastomer          | P            | 0°C to +50°C              | Excellent resistance to chemical and solvents.  |

Note: Even among rubber materials of the same category, the working temperature range differs depending upon the design of the Cuplas. For details, see the specifications of each Cupla series. As for the Nitto symbol for rubber material, fluoro rubber is designated as "FKM" or "X-100" for example. The above are general features, but the seal resistance depends on fluid temperature, fluid concentration, and additives contained in the fluid.

### Working Temperature Range

This shows the minimum and maximum temperature, in-between which the Cupla with the seal material can be used. However, it does not mean that they can be used continuously at the minimum or maximum working temperatures. Please check with us if you need Cuplas in such extreme applications.

### Valve Structure

|   |  |   |  |
|---|--|---|--|
| <b>Two-way shut-off</b>                   |  | Automatic shut-off valves are mounted in both plug and socket. The valves prevent spill out of fluid from the lines on disconnection.                 |  |
| <b>Two-way shut-off (Spill Reduction)</b> |  | "Two-way shut-off" with spill reduction design allows extremely little admixture of air on connection and minimizes fluid spill out on disconnection. |  |
| <b>One-way shut-off</b>                   |  | This design prevents fluid outflow only from the socket side on disconnection. Also available are plugs with an automatic shut-off valve.             |  |
| <b>Straight through</b>                   |  | Shut-off valve is equipped neither in plug nor in socket. Fluid flows out from either side on disconnection.  |  |

### Suitability for Vacuum

Indicates if the Cupla has necessary performance required for vacuum applications. (Note that the required performance is different in connection and in disconnection.)

### Interchangeability

Indicates whether the plug or socket of different series, types or models can be connected with each other.

### Max. Tightening Torque, Tightening Torque Range

Considering the balance between possible leakage caused by loose fit and too much structural stress when a Cupla is mounted on a workpiece, the appropriate screw-in torque value or range is suggested by the maker.

### Flow Direction

The design of some Cuplas may restrict the fluid flow direction only to one way. Check the maker's suggested direction before mount.


# Guide for Selecting "NITTO" Standard Cuplas

This chart will let you quickly select an appropriate Cupla for your application. For technical data, please refer to the detailed information pages of each Cupla, Seal Material Selection Table and Body Material Selection Table at the end of this catalog.

| Applicable fluid                             |                              | For Low Pressure (Air)  |   |   |   |  |   |   |   |
|--|------------------------------|---|---|---|---|--|---|---|---|
| Name   |                              | Micro Cupla   | Small Cupla   | Compact Cupla   | Cube Cupla  | Super Cupla  | Hi Cupla  | Hi Cupla BL   | Hi Cupla 200  |
| Photo  |                              |  |  |  |  |  |  |  |  |
| Body material<br>•<br>Working pressure (MPa) | Brass                        | 1.0   | 1.0   | 1.0   |   |  | 1.0   |   |   |
|  | Stainless steel              | 1.0   |   | 1.0   |   |  | 1.5   | 1.5   |   |
|  | Steel                        |   |   |   |   | 1.0  | 1.5   | 1.5   | 1.5   |
|  | Plastic                      |   |   |   | 1.0   |  |   |   |   |
|  | Others                       |   |   |   |   | 1.0  |   |   |   |
| Body surface treatment                       |                              | Chrome-plated (Brass only)  | Chrome-plated Nickel-plated (With Tube Fitter only)                               | —   | —   | Chrome-plated (Steel only) Nickel-plated (With Tube Fitter only)                   | Chrome-plated (Steel only)  | Chrome-plated (Steel only)  | Chrome-plated   |
| Size   | 1/8"                         | ○   | ○   | ○   | ○   | ○  | ○   |   |   |
|  | 1/4"                         |   | ○   |   |   | ○  | ○   | ○   | ○   |
|  | 5/16"                        |   |   |   |   |  |   |   |   |
|  | 3/8"                         |   |   |   |   |  | ○   | ○   | ○   |
|  | 1/2"                         |   |   |   |   |  | ○   | ○   | ○   |
|  | 3/4"                         |   |   |   |   |  | ○   |   |   |
|  | 1"                           |   |   |   |   |  | ○   |   |   |
|  | 1 1/4"                       |   |   |   |   |  |   |   |   |
|  | 1 1/2"                       |   |   |   |   |  |   |   |   |
|  | 2"                           |   |   |   |   |  |   |   |   |
|  | 2 1/2"                       |   |   |   |   |  |   |   |   |
|  | 3"                           |   |   |   |   |  |   |   |   |
|  | 4"                           |   |   |   |   |  |   |   |   |
| Others                                       | ○                            | ○   | ○   | ○   | ○   | ○  | ○   | ○   |   |
| Working temperature range                    |                              | -20°C to +80°C (NBR)  | -20°C to +80°C (NBR)  | -20°C to +180°C (FKM)   | -20°C to +60°C (NBR)  | -20°C to +80°C (NBR)   | -20°C to +80°C (NBR)  | -20°C to +80°C (NBR)  | -20°C to +60°C (NBR)  |
| Seal material                                |                              | NBR, FKM  | NBR   | FKM, EPDM   | NBR   | NBR  | NBR, FKM  | NBR   | NBR   |
| Connection method                            | Manual                       |   |   | ○   |   |  | ○   | ○   |   |
|  | Push-to-connect              | ○   | ○   |   | ○   | ○  |   |   | ○   |
| Valve structure                              | Two-way shut-off             |   |   | ○   | ○   |  |   |   |   |
|  | Two-way shut-off (Non-Spill) |   |   |   |   |  |   |   |   |
|  | One-way shut-off             | ○   | ○   |   | ○   | ○  | ○   | ○   | ○   |
|  | Straight through             |   |   |   | ○   |  |   |   |   |
| Detailed information page                    |                              | 17  | 21  | 23  | 25  | 27   | 29  | 31  | 33  |

## Guide for Selecting "NITTO" Standard Cuplas

This chart will let you quickly select an appropriate Cupla for your application. For technical data, please refer to the detailed information pages of each Cupla, Seal Material Selection Table and Body Material Selection Table at the end of this catalog.

| For Low Pressure (Air)  |   |   |   |   |   |  |   |   |   |
|---|---|---|---|---|---|--|---|---|---|
| Hi Cupla<br>for Connection<br>to Braided Hoses                                    | Nut Cupla<br>Rotary Nut Cupla   | Nut Cupla<br>200  | Lock Cupla<br>200   | Hi Cupla<br>Two Way Type  | Full-Blow<br>Cupla  | Purge<br>Hi Cupla PVR  | Purge<br>Hi Cupla   | Purge Line<br>Cupla   | Rotary<br>Line Cupla  |
|  |  |  |  |  |  |  |  |  |  |
| 1.0   |   |   |   |   |   |  | 1.0   | 1.0   |   |
| 1.5   | 1.5   | 1.5   | 1.5   | 1.5   |   |  |   |   |   |
|   |   |   |   |   | 1.5   | 1.5  |   |   | 1.5   |
| Chrome-plated<br>(Steel only)   | Chrome-plated   | Chrome-plated   | Chrome-plated   | Chrome-plated   | —   | —  | Chrome-plated   | Chrome-plated   | Chrome-plated   |
|   |   |   | ○   | ○   | ○   |  | ○   |   | ○   |
|   |   |   | ○   | ○   | ○   |  | ○   |   |   |
|   |   |   | ○   | ○   | ○   | ○  | ○   | ○   | ○   |
|   |   |   |   |   |   | ○  | ○   |   |   |
|   |   |   |   |   |   | ○  |   |   |   |
| ○   | ○   | ○   | ○   |   | ○   |  |   |   | ○   |
| -20°C to +80°C<br>(NBR)   | -20°C to +60°C<br>(NBR)   | -20°C to +60°C<br>(NBR)   | -20°C to +60°C<br>(NBR)   | -20°C to +80°C<br>(NBR)   | -20°C to +60°C<br>(NBR)   | -20°C to +60°C<br>(NBR)  | -20°C to +60°C<br>(NBR)   | -20°C to +60°C<br>(NBR)   | -20°C to +60°C<br>(NBR)   |
| NBR   | NBR   | NBR   | NBR   | NBR, FKM  | NBR   | NBR  | NBR   | NBR   | NBR   |
| ○   | ○   |   | ○   | ○   | ○   | ○  | ○   | ○   | ○   |
|   |   | ○   | ○   |   |   |  |   |   |   |
| ○   | ○   | ○   | ○   | ○   | ○   | ○  | ○   | ○   | ○   |
| 35  | 35  | 35  | 37  | 38  | 39  | 41   | 43  | 44  | 45  |

## Guide for Selecting “NITTO” Standard Cuplas

This chart will let you quickly select an appropriate Cupla for your application. For technical data, please refer to the detailed information pages of each Cupla, Seal Material Selection Table and Body Material Selection Table at the end of this catalog.

| Applicable fluid                             |                              | For Low Pressure (Air)  |   |   |   |  |   |   |   |
|--|------------------------------|---|---|---|---|--|---|---|---|
| Name   |                              | Line Cupla 200T/L/S   | Rotary Full-Blow Line Cupla   | Hi Cupla Ace  | Rotary Plug   | Twist Plug   | Purge Plug  | Anti-Vibration Plug Hose  | Duster Cupla  |
| Photo  |                              |  |  |  |  |  |  |  |  |
| Body material<br>•<br>Working pressure (MPa) | Brass                        |   |   |   |   |  |   |   |   |
|  | Stainless steel              |   |   |   |   |  |   |   |   |
|  | Steel                        |   |   |   | 1.5   | 1.0  | 1.0   |   |   |
|  | Plastic                      |   |   | 1.0, 1.5  |   |  |   |   |   |
|  | Others                       | 1.5   | 1.5   |   |   |  |   | 1.5   | 1.0   |
| Body surface treatment                       |                              | Chrome-plated   | —   | —   | Nickel-plated   | Nickel-plated  | Chrome-plated   | —   | Chrome-plated   |
| Size   | 1/8"                         |   |   |   |   | ○  |   |   |   |
|  | 1/4"                         | ○   | ○   | ○   | ○   | ○  | ○   | ○   | ○   |
|  | 5/16"                        |   |   |   |   |  |   |   |   |
|  | 3/8"                         |   |   | ○   | ○   | ○  | ○   | ○   | ○   |
|  | 1/2"                         | ○   | ○   |   |   |  | ○   |   | ○   |
|  | 3/4"                         |   |   |   |   |  |   |   |   |
|  | 1"                           |   |   |   |   |  |   |   |   |
|  | 1 1/4"                       |   |   |   |   |  |   |   |   |
|  | 1 1/2"                       |   |   |   |   |  |   |   |   |
|  | 2"                           |   |   |   |   |  |   |   |   |
|  | 2 1/2"                       |   |   |   |   |  |   |   |   |
|  | 3"                           |   |   |   |   |  |   |   |   |
|  | 4"                           |   |   |   |   |  |   |   |   |
| Others                                       |                              | ○   | ○   |   |   | ○  |   | ○   |   |
| Working temperature range                    |                              | -20°C to +60°C (NBR)  | -20°C to +60°C (NBR)  | -20°C to +60°C (NBR)  | -20°C to +80°C (NBR)  | -20°C to +60°C (NBR)   | -20°C to +60°C (NBR)  | —   | -20°C to +60°C (NBR)  |
| Seal material                                |                              | NBR   | NBR   | NBR   | NBR   | NBR  | NBR   | —   | NBR   |
| Connection method                            | Manual                       |   |   |   |   |  |   |   | ○   |
|  | Push-to-connect              | ○   | ○   | ○   |   |  |   |   |   |
| Valve structure                              | Two-way shut-off             |   |   |   |   |  |   |   |   |
|  | Two-way shut-off (Non-Spill) |   |   |   |   |  |   |   |   |
|  | One-way shut-off             | ○   | ○   | ○   |   |  |   |   | ○   |
|  | Straight through             |   |   |   |   |  |   |   |   |
| Detailed information page                    |                              | 47  | 49  | 51  | 53  | 54   | 55  | 56  | 57  |

## Guide for Selecting “NITTO” Standard Cuplas

This chart will let you quickly select an appropriate Cupla for your application. For technical data, please refer to the detailed information pages of each Cupla, Seal Material Selection Table and Body Material Selection Table at the end of this catalog.

| For Low Pressure (Air)  |   | For Oxygen and Fuel Gas   |   | For Low Pressure (Water)  |   |  |   |   |   |
|---|---|---|---|---|---|--|---|---|---|
| NK Cupla Hose   | NK Cupla Coil Hose  | Mini Cupla  | Mini Cupla Super  | Micro Cupla   | Small Cupla   | Compact Cupla  | Cube Cupla  | Hi Cupla  | Hi Cupla Ace  |
|  |  |  |  |  |  |  |  |  |  |
|   |   | 0.7   | 0.7   | 1.0   | 1.0   | 1.0  |   | 1.0   |   |
|   |   |   |   | 1.0   |   | 1.0  |   | 1.5   |   |
|   |   |   | 0.7   |   |   |  |   |   |   |
|   |   |   |   |   |   |  | 1.0   |   | 1.0, 1.5  |
| 1.0   | 0.7   |   |   |   |   |  |   |   |   |
| Chrome-plated (Plug only)   | Chrome-plated (Plug only)   | —   | Chrome-plated   | Chrome-plated (Brass only)  | Chrome-plated   | —  | —   | —   | —   |
|   |   | ○   |   | ○   | ○   | ○  | ○   | ○   |   |
|   |   | ○   | ○   |   | ○   |  |   | ○   | ○   |
|   |   | ○   | ○   |   |   |  |   | ○   |   |
|   |   | ○   | ○   |   |   |  |   | ○   | ○   |
|   |   |   |   |   |   |  |   | ○   |   |
|   |   |   |   |   |   |  |   | ○   |   |
|   |   |   |   |   |   |  |   | ○   |   |
|   |   |   |   |   |   |  |   | ○   |   |
| ○   | ○   | ○   | ○   | ○   | ○   | ○  | ○   |   | ○   |
| -5°C to +60°C (NBR)   | -5°C to +60°C (NBR)   | -20°C to +80°C (NBR)  | -20°C to +80°C (NBR)  | -20°C to +80°C (NBR)  | -20°C to +80°C (NBR)  | -20°C to +180°C (FKM)  | -20°C to +60°C (NBR)  | -20°C to +80°C (NBR)  | -20°C to +60°C (NBR)  |
| NBR   | NBR   | NBR   | NBR   | NBR, FKM  | NBR   | FKM, EPDM  | NBR   | NBR, FKM  | NBR   |
|   |   |   |   |   |   | ○  |   | ○   |   |
| ○   | ○   | ○   | ○   | ○   | ○   |  | ○   |   | ○   |
|   |   |   |   |   |   | ○  | ○   |   |   |
| ○   | ○   | ○   | ○   | ○   | ○   |  | ○   | ○   | ○   |
|   |   |   |   |   |   |  | ○   |   |   |
| 58  | 58  | 59  | 61  | 20  | 21  | 23   | 25  | 29  | 51  |

## Guide for Selecting “NITTO” Standard Cuplas

This chart will let you quickly select an appropriate Cupla for your application. For technical data, please refer to the detailed information pages of each Cupla, Seal Material Selection Table and Body Material Selection Table at the end of this catalog.

| Applicable fluid                                   |                                 | For Low Pressure (Water)  |   |   |   | For Medium Pressure / For Low Pressure   |   |   |   |
|--|---------------------------------|---|---|---|---|--|---|---|---|
| Name   |                                 | Mold Cupla  | Mold Cupla<br>High Flow Type  | Flow Meter  | Lever Lock<br>Cupla   | TSP Cupla  | TSP Cupla<br>with Ball Valve  | SP Cupla<br>Type A  | Zerospill<br>Cupla  |
| Photo  |                                 |  |  |  |  |  |  |  |  |
| Body material<br>•<br>Working<br>pressure<br>(MPa) | Brass                           | 1.0   | 1.0   |   |   | 5.0,3.0,2.0,1.5  | 1.0   | 5.0,3.0,2.0,1.5   | 3.5   |
|  | Stainless steel                 |   |   |   | 1.8, 1.6, 1.1   | 7.5,4.5,3.0,2.0  |   | 7.5,4.5,3.0,2.0   | 3.5   |
|  | Steel                           |   |   |   |   | 7.5,4.5,3.0,2.0  |   | 7.5,4.5,3.0,2.0   |   |
|  | Plastic                         |   |   |   | 0.5, 0.2  |  |   |   |   |
|  | Others                          |   |   | 0.5   | 1.8,1.1,0.9,0.7   |  |   |   |   |
| Body surface treatment                             |                                 | —   | —   | —   | —   | Nickel-plated<br>(Steel only)  | —   | Nickel-plated<br>(Steel only)   | —   |
| Size   | 1/8"                            | ○   |   |   |   | ○  |   | ○   |   |
|  | 1/4"                            | ○   | ○   |   |   | ○  | ○   | ○   | ○   |
|  | 5/16"                           |   |   |   |   |  |   |   |   |
|  | 3/8"                            | ○   | ○   | ○   |   | ○  | ○   | ○   | ○   |
|  | 1/2"                            |   | ○   |   |   | ○  | ○   | ○   | ○   |
|  | 3/4"                            |   |   |   | ○   | ○  | ○   | ○   | ○   |
|  | 1"                              |   |   |   | ○   | ○  | ○   | ○   | ○   |
|  | 1 1/4"                          |   |   |   | ○   | ○  |   | ○   |   |
|  | 1 1/2"                          |   |   |   | ○   | ○  |   | ○   |   |
|  | 2"                              |   |   |   | ○   | ○  |   | ○   |   |
|  | 2 1/2"                          |   |   |   | ○   |  |   |   |   |
|  | 3"                              |   |   |   | ○   |  |   |   |   |
|  | 4"                              |   |   |   | ○   |  |   |   |   |
|  | Others                          | ○   |   |   |   | ○  |   |   |   |
| Working temperature range                          |                                 | -20°C to +80°C<br>(NBR)   | -20°C to +80°C<br>(NBR)   | +20°C to +60°C<br>(NBR)   | -20°C to +80°C<br>(NBR)<br>+5°C to +50°C<br>(PP body)                             | -20°C to +80°C<br>(NBR)  | -5°C to +120°C<br>(FKM)   | -20°C to +80°C<br>(NBR)   | -20°C to +80°C<br>(NBR)   |
| Seal material                                      |                                 | NBR, FKM  | NBR, FKM  | NBR   | NBR, FKM,<br>SI, EPDM   | NBR, FKM,<br>EPDM  | FKM   | NBR, FKM,<br>EPDM   | NBR, FKM,<br>EPDM   |
| Connection<br>method                               | Manual                          |   |   |   | ○   | ○  | ○   | ○   |   |
|  | Push-to-connect                 | ○   | ○   |   |   |  |   |   | ○   |
| Valve<br>structure                                 | Two-way shut-off                |   |   |   |   |  |   | ○   |   |
|  | Two-way shut-off<br>(Non-Spill) |   |   |   |   |  |   |   | ○   |
|  | One-way shut-off                | ○   | ○   |   |   |  | ○   |   |   |
|  | Straight through                | ○   | ○   |   | ○   | ○  |   |   |   |
| Detailed information page                          |                                 | 63  | 65  | 66  | 67  | 71   | 73  | 75  | 77  |

## Guide for Selecting “NITTO” Standard Cuplas

This chart will let you quickly select an appropriate Cupla for your application. For technical data, please refer to the detailed information pages of each Cupla, Seal Material Selection Table and Body Material Selection Table at the end of this catalog.

| For High Pressure   |   |   |   |   |   |  |   |   |   |
|---|---|---|---|---|---|--|---|---|---|
| HSP Cupla   | Hyper HSP Cupla   | 210 Cupla   | HSU Cupla   | S210 Cupla  | 280 Cupla   | 350 Cupla  | Flat Face Cupla F35   | Flat Face Cupla FF  | 450B Cupla  |
|  |  |  |  |  |  |  |  |  |  |
| 20.6, 18.0, 14.0  | 20.6  | 20.6  | 21.0  | 20.6  | 31.5, 27.5  | 34.5   | 35  | 35  | 44.1  |
| Nickel-plated   | Nickel-plated   | Nickel-plated   | —   | —   | Bright chromate conversion coating  | Nickel-plated  | Nickel-plated   | Autocatalytic nickel-phosphorus coating   | Nickel-plated   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   |
| <input type="radio"/>   | <input type="radio"/>   |   |   |   |   |  |   |   |   |

## Guide for Selecting “NITTO” Standard Cuplas

This chart will let you quickly select an appropriate Cupla for your application. For technical data, please refer to the detailed information pages of each Cupla, Seal Material Selection Table and Body Material Selection Table at the end of this catalog.

| Applicable fluid                             |                              | For High Pressure   | For Multi-Port Connection (Manual)  |   |   | For Multi-Port Connection (Automatic)  |   |   |   |
|--|------------------------------|---|---|---|---|--|---|---|---|
| Name   |                              | 700R Cupla  | Multi Cupla MAM Type  | Multi Cupla MAM-B Type  | Multi Cupla MAM-A Type  | Multi Cupla MAS  | Multi Cupla MAT   | Multi Cupla MALC-SP   | Multi Cupla MALC-HSP  |
| Photo  |                              |  |  |  |  |  |  |  |  |
| Body material<br>•<br>Working pressure (MPa) | Brass                        |   | 0.7   | 1.0   | 1.0   |  |   |   |   |
|  | Stainless steel              |   |   |   |   | 7.0  | 7.0   | 7.5, 5.0, 1.5   |   |
|  | Steel                        | 68.6  |   |   |   |  |   |   | 25.0, 21.0  |
|  | Plastic                      |   |   |   |   |  |   |   |   |
| Others                                       |                              |   |   |   |   |  |   |   |   |
| Body surface treatment                       |                              | Nickel-plated   | Chrome-plated   | Nickel-plated   | Nickel-plated   | Autocatalytic nickel-phosphorus coating  | Autocatalytic nickel-phosphorus coating   | Autocatalytic nickel-phosphorus coating   | Autocatalytic nickel-phosphorus coating   |
| Size   | 1/8"                         |   | ○   | ○   |   |  |   |   |   |
|  | 1/4"                         |   |   | ○   | ○   | ○  | ○   |   |   |
|  | 5/16"                        |   |   |   |   |  |   |   |   |
|  | 3/8"                         | ○   |   |   | ○   | ○  | ○   |   |   |
|  | 1/2"                         | ○   |   |   | ○   | ○  | ○   |   |   |
|  | 3/4"                         |   |   |   |   | ○  | ○   |   |   |
|  | 1"                           |   |   |   |   | ○  | ○   |   |   |
|  | 1 1/4"                       |   |   |   |   |  |   |   |   |
|  | 1 1/2"                       |   |   |   |   |  |   |   |   |
|  | 2"                           |   |   |   |   |  |   |   |   |
|  | 2 1/2"                       |   |   |   |   |  |   |   |   |
|  | 3"                           |   |   |   |   |  |   |   |   |
| 4"   |                              |   |   |   |   |  |   |   |   |
| Others                                       |                              |   |   |   |   |  |   | ○   | ○   |
| Working temperature range                    |                              | -20°C to +80°C (NBR)  | -20°C to +60°C (NBR)  | -20°C to +180°C (FKM)   | -20°C to +180°C (FKM)   | -20°C to +180°C (FKM)  | -20°C to +180°C (FKM)   | -20°C to +180°C (FKM)   | -20°C to +180°C (FKM)   |
| Seal material                                |                              | NBR, FKM  | NBR   | FKM   | FKM   | FKM  | FKM   | FKM   | FKM   |
| Connection method                            | Manual                       | ○   |   |   |   |  |   |   |   |
|  | Push-to-connect              |   |   |   |   |  |   |   |   |
| Valve structure                              | Two-way shut-off             | ○   |   | ○   | ○   | ○  | ○   |   |   |
|  | Two-way shut-off (Non-Spill) |   |   |   |   |  |   | ○   | ○   |
|  | One-way shut-off             |   | ○   |   |   |  |   |   |   |
|  | Straight through             |   |   |   |   |  |   |   |   |
| Detailed information page                    |                              | 98  | 99  | 101   | 105   | 109  | 109   | 111   | 115   |

## Guide for Selecting “NITTO” Standard Cuplas

This chart will let you quickly select an appropriate Cupla for your application. For technical data, please refer to the detailed information pages of each Cupla, Seal Material Selection Table and Body Material Selection Table at the end of this catalog.

| For High Purity Chemicals   |   |   |   |   |   | For Paint  | For Inert Gas and Vacuum  |   |  |
|---|---|---|---|---|---|--|---|---|--|
| Semicon Cupla<br>SP Type  | Semicon Cupla<br>SCS Type   | Semicon Cupla<br>SCY Type   | Semicon Cupla<br>SCT Type   | Semicon Cupla<br>SCAL Type  | Semicon Cupla<br>SCF Type   | Paint Cupla  | SP-V Cupla  | PCV<br>Pipe Cupla   |  |
|  |  |  |  |  |  |  |  |  |  |
| 0.2   | 0.2   | 0.2   |   |   |   | 1.0  | 5.0, 3.0<br>7.5, 4.5  | 4.5   |  |
|   |   |   | 0.2   | 0.2   | 0.2   |  |   |   |  |
|   |   |   |   |   |   | 1.0  |   |   |  |
| Electropolished   | Electropolished   | Electropolished   | —   | —   | —   | —  | —   | —   |  |
| ○   | ○   | ○   |   |   |   |  |   |   |  |
| ○   | ○   | ○   | ○   | ○   |   |  | ○   | ○   |  |
| ○   | ○   | ○   | ○   | ○   | ○   | ○  | ○   | ○   |  |
| ○   | ○   | ○   | ○   | ○   | ○   |  | ○   |   |  |
| ○   | ○   | ○   | ○   | ○   | ○   |  | ○   |   |  |
|   |   |   |   | ○   |   |  |   |   |  |
|   |   |   |   |   | ○   |  |   | ○   |  |
| 0°C to +50°C<br>(FKM)   | 0°C to +50°C<br>(P)   | 0°C to +50°C<br>(P)   | +5°C to +50°C<br>(FKM)  | +5°C to +50°C<br>(FKM)  | +5°C to +50°C<br>(FKM)  | 0°C to +50°C<br>(PFA)  | -20°C to +80°C<br>(CR)  | -20°C to +80°C<br>(CR)  |  |
| FKM, EPDM,<br>P, KL   | P<br>(O-ring for socket)  | P, PTFE<br>(Packing seal<br>for socket)   | FEP-coated<br>FKM   | FEP-coated<br>FKM   | FEP-coated<br>FKM   | PFA  | CR, FKM,<br>HNBR  | CR, FKM,<br>HNBR  |  |
| ○   | ○   | ○   | ○   | ○   | ○   | ○  | ○   | ○   |  |
| ○   | ○   | ○   | ○   | ○   | ○   |  | ○   |   |  |
|   |   |   |   | ○   |   | ○  |   |   |  |
|   |   |   |   |   |   | ○  |   | ○   |  |
| 119   | 120   | 121   | 122   | 123   | 124   | 125  | 127   | 129   |  |

# Semi-standard Cupla Series

“Semi-standard Cupla Series” are products with an already established record but are not standard stock items.

# Accessories

# Special Made-to-Order Cuplas



| Cupla Safety Mechanism  | For Water  | Accessories  | For Inert Gases  |
|---|--|--|--|
| <p><b>Cupla with Single Lock</b> <small>131 Page</small></p> <p>Accidental disconnection prevention mechanism</p>    | <p><b>TSP-HP Cupla (for High Pressure)</b> <small>132 Page</small></p> <p>High pressure and general purpose type</p>  <p>Valve structure: Straight through</p> <p>Working pressure : 9.0 MPa (91.8 kgf/cm<sup>2</sup>)<br/>Body material : Stainless steel<br/>Application : 1/4" to 1/2"<br/>Seal material : NBR, etc.</p>                                     | <p><b>Dip Mold Cap</b> <small>136 Page</small></p> <p>Dust caps for Hi Cupla, SP Cupla Type A, TSP Cupla, Zerosupill Cupla and Hydraulic Cupla</p>     | <p><b>Charge Cupla CS Type</b></p> <p>For industrial gases<br/>Connectable to SP-V Cupla plugs</p>  <p>Valve structure: Two-way shut-off</p> <p>Working pressure : 3.0 MPa (31 kgf/cm<sup>2</sup>)<br/>Body material : Stainless steel (some parts are made of aluminum and brass)<br/>Application : 1/4"<br/>Seal material : CR, HNBR</p>              |
| <p><b>Cupla with Safety Lock</b> <small>131 Page</small></p> <p>Accidental disconnection prevention mechanism</p>    | <p><b>For Low Pressure (air)</b></p>   | <p><b>Safety Cap</b> <small>136 Page</small></p> <p>Metal caps for Hi Cupla Series, SP Cupla Type A, TSP Cupla and Hydraulic Cupla •Semi-standard</p>  | <p><b>Charge Cupla CNR Type</b></p> <p>For industrial gases<br/>Connectable to SP-V Cupla plugs</p>  <p>Valve structure: Two-way shut-off</p> <p>Working pressure : 4.5 MPa (46 kgf/cm<sup>2</sup>)<br/>Body material : Stainless steel (some parts are made of aluminum and brass)<br/>Application : 1/4", 3/8", 1/2"<br/>Seal material : CR, HNBR</p> |
| <p><b>For Temperature Controllers</b></p>   | <p><b>Plastic Cupla BC Type</b> <small>135 Page</small></p> <p>Valveless type for low pressure air piping</p>  <p>Valve structure: Straight through</p> <p>Working pressure : 0.07 MPa (0.7 kgf/cm<sup>2</sup>)<br/>Body material : Plastic<br/>Application : 1/4", 3/8"<br/>Seal material : NBR</p>   | <p><b>Sleeve Cover</b> <small>137 Page</small></p> <p>Plastic cover for Hi Cupla Series</p>    | <p><b>Auto Cupla AC Type</b></p> <p>For industrial gases<br/>Connectable to SP-V Cupla plugs</p>  <p>Valve structure: Two-way shut-off</p> <p>Working pressure : 3.0 MPa (31 kgf/cm<sup>2</sup>)<br/>Body material : Stainless steel (some parts are made of aluminum and brass)<br/>Application : 1/4", 3/8"<br/>Seal material : CR, HNBR, NBR</p>    |
| <p><b>MYU Cupla</b> <small>132 Page</small></p> <p>For small bore piping (max.10 mm outer diameter) to control temperatures<br/>Applicable fluid : Water, gas, air</p>  <p>Valve structure: Two-way shut-off</p> <p>Working pressure : 1.0 MPa (10 kgf/cm<sup>2</sup>)<br/>Body material : Stainless steel, brass (nickel-plated)<br/>Application : Please let us know the required sizes and end configurations.<br/>Seal material : NBR, EPDM, FKM</p>   | <p><b>Plastic Cupla BCC Type</b> <small>135 Page</small></p> <p>Equipped with flow controller for low pressure air piping</p>  <p>Valve structure: One-way shut-off</p> <p>Working pressure : 0.07 MPa (0.7 kgf/cm<sup>2</sup>)<br/>Body material : Plastic<br/>Application : 3/8"<br/>Seal material : NBR</p>  | <p><b>Protection Cover</b> <small>137 Page</small></p> <p>Plastic Cover for Nut Cupla and Full-Blow Cupla Nut Type</p>                                | <p><b>Auto Cupla ACV Type</b></p> <p>For industrial gases<br/>Connectable to SP-V Cupla plugs</p>  <p>Valve structure: Two-way shut-off</p> <p>Working pressure : 3.0 MPa (31 kgf/cm<sup>2</sup>)<br/>Body material : Stainless steel (some parts are made of aluminum and brass)<br/>Application : 1/4", 3/8"<br/>Seal material : CR, HNBR, NBR</p>  |
| <p><b>Little Cupla</b> <small>132 Page</small></p> <p>For small bore piping (max.14 mm outer diameter) to control temperatures<br/>Applicable fluid : Water, gas, air</p>  <p>Valve structure: Two-way shut-off</p> <p>Working pressure : 1.5 MPa (15 kgf/cm<sup>2</sup>)<br/>Body material : Stainless steel, brass (chrome-plated)<br/>Application : Please let us know the required sizes and end configurations.<br/>Seal material : NBR, EPDM, FKM</p> | <p><b>High Flow Cupla</b> <small>133 Page</small></p> <p>For piping to control temperatures<br/>Applicable fluid: Water, Heat transfer fluids</p>  <p>Valve structure: Two-way shut-off</p> <p>Working pressure : 1.0 MPa (10 kgf/cm<sup>2</sup>)<br/>Body material : Stainless steel, brass<br/>Application : 1/4" to 1/2"<br/>Seal material : EPDM, FKM</p> | <p><b>Dust Cap</b> <small>137 Page</small></p> <p>Plastic cap for Hi Cupla Series</p>    | <p><b>Airless Cupla CNA Type</b></p> <p>For industrial gases</p>  <p>Valve structure: Two-way shut-off</p> <p>Working pressure : 3.0 MPa (31 kgf/cm<sup>2</sup>)<br/>Body material : Stainless steel<br/>Application : 3/8"<br/>Seal material : CR, HNBR</p>  |
| <p><b>High Flow Cupla BI Type</b> <small>134 Page</small></p> <p>High Flow Cupla with ferrule flange mount<br/>Applicable fluid: Water, Heat transfer fluids</p>  <p>Valve structure: Two-way shut-off</p> <p>Working pressure : 1.0 MPa (10 kgf/cm<sup>2</sup>)<br/>Body material : Stainless steel<br/>Application : 1/8" to 1/2"<br/>Seal material : EPDM, FKM</p>  | <p><b>Drain Cock / Pressure Gauge</b> <small>137 Page</small></p> <p>Accessories for Air Lines of Hi Cupla Series</p>    | <p><b>Sleeve Stopper</b> <small>137 Page</small></p> <p>Sleeve Stopper for SP Cupla Type A</p>   | <p><b>Accessories for O-ring Maintenance</b> <small>138 Page</small></p> <p>Jigs &amp; grease for replacement of O-rings in SP Cupla Type A, TSP Cupla, Zerosupill Cupla and HSP Cupla</p>   |
| <p><b>When placing your order:</b><br/>Please select your appropriate combination from the column in each product page (on the right beside the product name) then decide the seal and body materials from the selection tables listed at the end of the catalog.</p>   | <p><b>Purge Adapter</b> <small>138 Page</small></p> <p>Metal Purge Adapter for Hydraulic lines •Semi-standard</p>    | <p><b>Residual Pressure Release Jig</b> <small>138 Page</small></p> <p>Residual Pressure Release Jig for SP Cupla and Hydraulic Cuplas</p>           | <p><b>Cupla Adapter for Braided Hose Connection</b> <small>139 Page</small></p> <p>Mounts on Cupla plug / socket with female thread</p>  <p><b>NEW</b></p>   |

# Special Made-to-Order Cuplas

Nitto Kohki is developing Cuplas with various functions and specifications to suit respective user's applications. The Cuplas on this page are examples of such.

## ⚠ Important notice

Special made-to-order Cuplas are supplied based upon the specific instructions/ specifications detailed by the customer. Once written acceptance of our final drawing/ specifications of the Cupla is received from the customer we formally accept this as a final order. It is essential, as the customer, to carry out a performance test of the special made-to-order Cupla, in its specific usage conditions, for assurance of safety and adaptability to the hoses, pipes or devices used in the application. Use of the made-to-order Cupla in any application or condition other than those specified in the design drawing, will exclude Nitto Kohki from any liabilities for any special, indirect or consequential loss or damages.
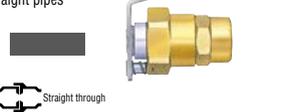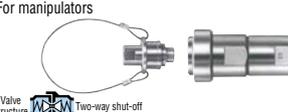
| For Gases and Liquids<br>(Pipe Cupla Series)   |  | For Inert Gas and Vacuum   | For High Purity Chemicals   | Automatic Multi Cupla   |
|--|--|--|---|---|
| <p><b>PCB Cupla</b><br/>For expanded pipes</p>  <p>Valve structure: Straight through</p> <p>Working pressure: To be defined after consultation.<br/>Body material: Brass (some of the parts are of stainless steel)<br/>Pipe sizes: To be complied with your requirements.<br/>Seal material: CR, FKM, NBR</p>                          | <p><b>PCA Cupla</b><br/>Pipes for high pressure line</p>  <p>Valve structure: Straight through</p> <p>Working pressure: To be defined after consultation.<br/>Body material: Brass (some of the parts are of stainless steel and steel)<br/>Pipe sizes: To be complied with your requirements.<br/>Seal material: CR, FKM, NBR</p>                        | <p><b>Semicon Cupla SML Type</b><br/>For semiconductor manufacturing equipment</p>  <p>Valve structure: Two-way shut-off</p> <p>Working pressure: 0.2 MPa (2 kgf/cm<sup>2</sup>)<br/>Body material: Stainless steel<br/>Application: 1/8", 1/4"<br/>Seal material: FKM, EPDM, others</p>   | <p><b>Multi Cupla AMCS-FA Type</b><br/>Full automatic operation type</p>  <p>Valve structure: Two-way shut-off</p> <p>Working pressure: To be decided after consultation.<br/>Body material: To be decided after consultation.<br/>Application: To be decided after consultation.<br/>Seal material: To be decided after consultation.</p> |   |
| <p><b>PCBW Cupla</b><br/>For bulged pipes and spool pipes</p>  <p>Valve structure: Straight through</p> <p>Working pressure: To be defined after consultation.<br/>Body material: Brass (some of the parts are of stainless steel)<br/>Pipe sizes: To be complied with your requirements.<br/>Seal material: CR, FKM, NBR</p>           | <p><b>PCIO Cupla</b><br/>For pipes that have inner locking system</p>  <p>Valve structure: Straight through</p> <p>Working pressure: To be defined after consultation.<br/>Body material: Stainless steel (some of the parts are of brass)<br/>Pipe sizes: To be complied with your requirements.<br/>Seal material: CR, FKM, NBR</p>                     | <p><b>Semicon Cupla scf Straight Type</b><br/>For semiconductor manufacturing equipment<br/>• see page 124</p>  <p>Valve structure: Two-way shut-off</p> <p>Working pressure: 0.2 MPa (2 kgf/cm<sup>2</sup>)<br/>Body material: Fluorine contained resin<br/>Application: 3/8", 1/2"<br/>Seal material: FEP-coated FKM, Fluoro-resin</p> | <p><b>Multi Cupla AMCS-SA Type</b><br/>Semi-automatic type</p>  <p>Valve structure: Two-way shut-off</p> <p>Working pressure: To be decided after consultation.<br/>Body material: To be decided after consultation.<br/>Application: To be decided after consultation.<br/>Seal material: To be decided after consultation.</p>           |   |
| <p><b>PCP Cupla</b><br/>For bulged pipes and spool pipes</p>  <p>Valve structure: Straight through</p> <p>Working pressure: To be defined after consultation.<br/>Body material: POM (polyacetal), some of the parts are of stainless steel<br/>Pipe sizes: To be complied with your requirements.<br/>Seal material: CR, FKM, NBR</p> | <p><b>PCD Cupla</b><br/>For pipes of special shapes</p>  <p>Valve structure: Straight through</p> <p>Working pressure: To be defined after consultation.<br/>Body material: Stainless steel (some of the parts are of aluminum)<br/>Pipe sizes: To be complied with your requirements.<br/>Seal material: CR, FKM, NBR</p>                               | <p><b>For Water</b>                      <b>For Water Purifiers</b></p>  |   |   |
| <p><b>PCBL Cupla</b><br/>For straight pipes</p>  <p>Valve structure: Straight through</p> <p>Working pressure: To be defined after consultation.<br/>Body material: Stainless steel (some of the parts are of brass)<br/>Pipe sizes: To be complied with your requirements.<br/>Seal material: CR, FKM, NBR</p>                       | <p><b>Auto Cupla</b><br/>For copper pipes</p>  <p>Valve structure: Straight through</p> <p>Working pressure: To be defined after consultation.<br/>Body material: Stainless steel (some of the parts are of brass)<br/>Pipe sizes: To be complied with your requirements.<br/>Seal material: CR, FKM, NBR</p>   | <p><b>Airless Cupla</b><br/>For physical and chemical devices</p>  <p>Valve structure: Two-way shut-off</p> <p>Working pressure: 3.0 MPa (31 kgf/cm<sup>2</sup>)<br/>Body material: Stainless steel<br/>Application: 1/4" to 1"<br/>Seal material: FKM, EPDM</p>   | <p><b>Cupla for Water Purifier</b><br/>For water purifier</p>  <p>Valve structure: One-way shut-off</p> <p>Working pressure: 0.5 MPa (5 kgf/cm<sup>2</sup>)<br/>Body material: Plastic<br/>Application: ø9 x ø15<br/>Seal material: EPDM</p>   |   |
| <p><b>PCL Cupla</b><br/>For straight pipes</p>  <p>Valve structure: Straight through</p> <p>Working pressure: To be defined after consultation.<br/>Body material: Brass (some of the parts are of steel)<br/>Pipe sizes: To be complied with your requirements.<br/>Seal material: CR, FKM, NBR</p>                                  | <p><b>Screw Cupla PCS Type</b><br/>For vacuum and pressure testing<br/>Please consult with us for larger sizes.</p>  <p>Valve structure: Straight through</p> <p>Working pressure: 3.0 MPa (31 kgf/cm<sup>2</sup>)<br/>Body material: steel (some parts are made of stainless steel)<br/>Application: 7/16" to 7/8"<br/>Seal material: CR, NBR, FKM</p> | <p><b>For Manipulators</b>                      <b>Safety Equipment</b></p>  |   |   |
| <p><b>PCW Cupla</b><br/>For straight pipes</p>  <p>Valve structure: Straight through</p> <p>Working pressure: To be defined after consultation.<br/>Body material: Brass (some of the parts are of stainless steel and steel)<br/>Pipe sizes: To be complied with your requirements.<br/>Seal material: CR, FKM, NBR</p>              | <p><b>For Pneumatics and Hydraulics</b></p>  |  | <p><b>MP Cupla</b><br/>For manipulators</p>  <p>Valve structure: Two-way shut-off</p> <p>Working pressure: 5.0 MPa (51 kgf/cm<sup>2</sup>)<br/>Body material: Stainless steel<br/>Application: 1/4" to 1"<br/>Seal material: FKM, others</p>  | <p><b>Automatic Disconnection Cupla</b><br/>For fail safe system and automatic connection/disconnection applications</p>  <p>Valve structure: Two-way shut-off</p> <p>Working pressure: To be decided after consultation.<br/>Body material: To be decided after consultation.<br/>Application: To be decided after consultation.<br/>Seal material: To be decided after consultation.</p> |
| <p><b>Screw Cupla NCM Type</b><br/>For connecting pneumatic/hydraulic lines</p>  <p>Valve structure: Straight through</p> <p>Working pressure: 14.0 MPa (142 kgf/cm<sup>2</sup>)<br/>Body material: Steel (chrome-plated)<br/>Application: 1/8" to 1"<br/>Seal material: NBR</p>  | <p><b>When placing your order:</b><br/>Please ask about the details, since the Cuplas in this group are special made-to-order items.</p>   |  |   |   |

# Cupla Quality Control

Cuplas are delivered to the user only after passing the most stringent quality control procedures, including careful selection of materials, unending pursuit of process accuracy and rigorous durability tests. Long years of devotion to thorough quality control are paying dividends in users' confidence today but still we persist in challenging even higher quality levels.

Quality control system that earns the constant trust from users



*Electron microscope*




*Inspection and measurement with various testing devices*



*Automatic Cupla inspection system*



*Inspection in clean room*

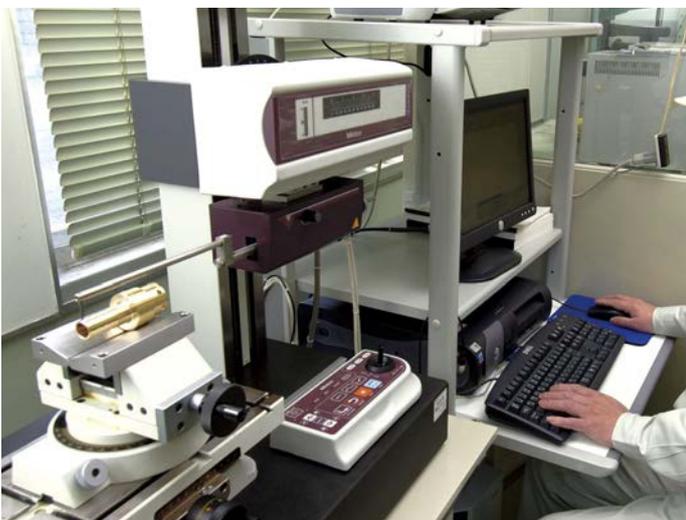

*Shape measuring machine*



*Hydraulic impact tester*


# Standard Cupla Series

## Index



### Examples of Air Line connections Using Hi Cuplas Group Models

Air distribution is one of the typical piping systems. Various Hi Cupla Series models meet all needs of air piping from main supply, relays in factories, pipe end connections to pneumatic tools, and those of air piping within equipment. The following sketch gives you some examples of air piping using Hi Cupla Series and may serve as a good reference in selecting appropriate Cuplas.

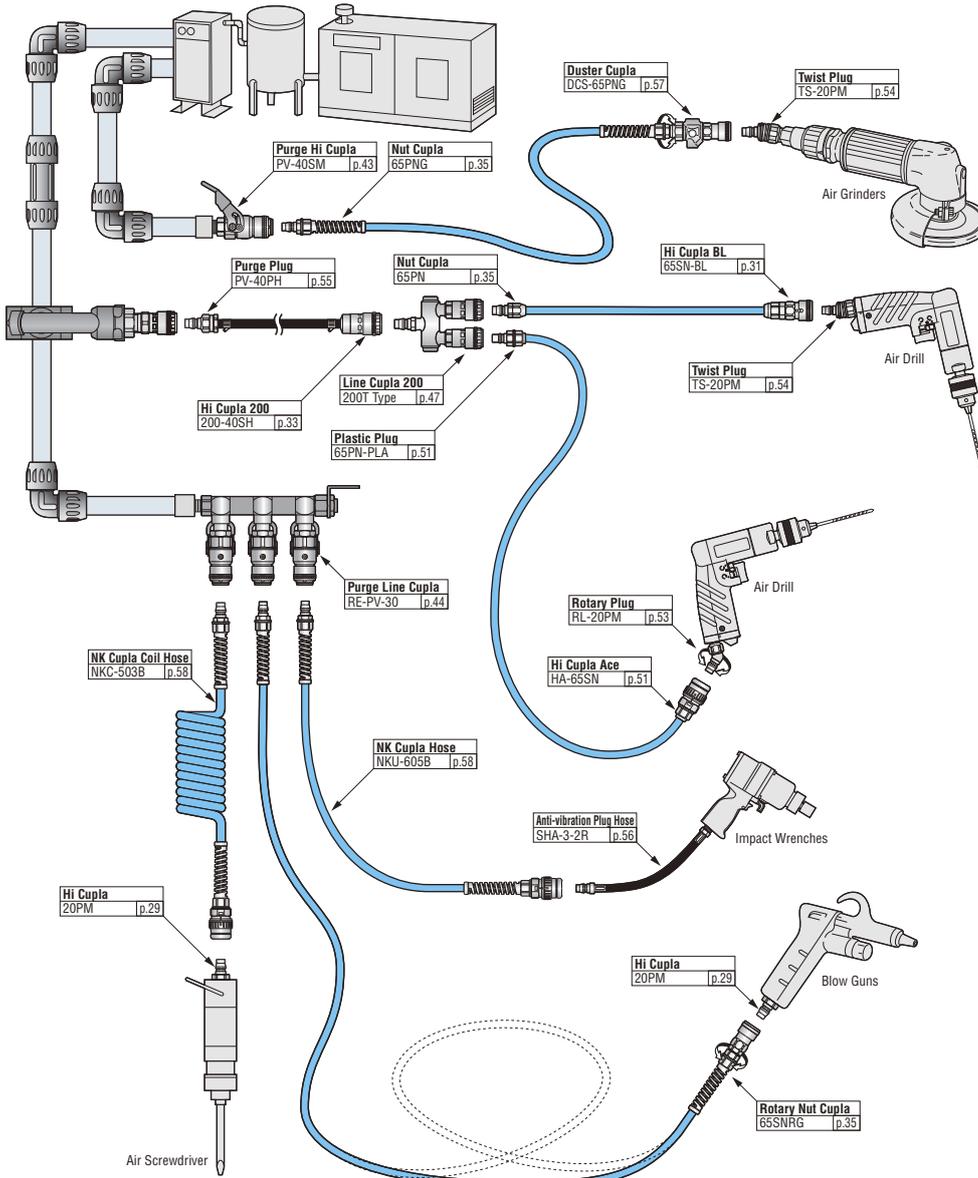

|                               | Product Name                             | Page                        |
|-------------------------------|--|-----------------------------|
| 2                             | 210 Cupla                                | 83                          |
|                               | 280 Cupla                                | 89                          |
|                               | 350 Cupla                                | 91                          |
| 4                             | 450B Cupla                               | 97                          |
|                               | 700R Cupla                               | 98                          |
| A                             | Anti-vibration Plug Hose                 | 56                          |
| C                             | Compact Cupla                            | 23                          |
|                               | Cube Cupla                               | 25                          |
|                               | Duster Cupla                             | 57                          |
| F                             | Flat Face Cupla F35                      | 93                          |
|                               | Flat Face Cupla FF                       | 95                          |
|                               | Flow Meter                               | 66                          |
|                               | Full-Blow Cupla                          | 39                          |
|                               | Hi Cupla                                 | 29                          |
|                               | Hi Cupla 200                             | 33                          |
|                               | Hi Cupla Ace                             | 51                          |
| H                             | Hi Cupla BL                              | 31                          |
|                               | Hi Cupla for Connection to Braided Hoses | 35                          |
|                               | Hi Cupla Two Way Type                    | 38                          |
|                               | HSP Cupla                                | 79                          |
|                               | HSU Cupla                                | 85                          |
|                               | Hyper HSP Cupla                          | 81                          |
|                               | L  | Lever Lock Cupla Metal Body |
| Lever Lock Cupla Plastic Body |  | 67                          |
| Line Cupla 200                |  | 47                          |
| Lock Cupla 200                |  | 37                          |
| Micro Cupla                   |  | 17                          |
| M                             | Mini Cupla                               | 59                          |
|                               | Mini Cupla Super                         | 61                          |
|                               | Mold Cupla                               | 63                          |
|                               | Mold Cupla High Flow Type                | 65                          |
|                               | Multi Cupla MALC-HSP Type                | 115                         |
|                               | Multi Cupla MALC-SP Type                 | 111                         |
|                               | Multi Cupla MALS Type / MALT Type        | 110                         |
|                               | Multi Cupla MAM-A Type                   | 105                         |
|                               | Multi Cupla MAM-B Type                   | 101                         |
|                               | Multi Cupla MAM Type                     | 99                          |
| N                             | Multi Cupla MAS Type / MAT Type          | 109                         |
|                               | NK Cupla Coil Hose                       | 58                          |
|                               | NK Cupla Hose                            | 58                          |
|                               | Nut Cupla                                | 35                          |
|                               | Nut Cupla 200                            | 35                          |
| P                             | Paint Cupla                              | 125                         |
|                               | PCV Pipe Cupla                           | 129                         |
|                               | Purge Hi Cupla                           | 43                          |
|                               | Purge Hi Cupla PVR Type                  | 41                          |
|                               | Purge Line Cupla                         | 44                          |
|                               | Purge Plug                               | 55                          |
| R                             | Rotary Full-Blow Line Cupla              | 49                          |
|                               | Rotary Line Cupla                        | 45                          |
|                               | Rotary Nut Cupla                         | 35                          |
|                               | Rotary Plug                              | 53                          |
| S                             | S210 Cupla                               | 87                          |
|                               | Semicon Cupla SCAL Type                  | 123                         |
|                               | Semicon Cupla SCF Type                   | 124                         |
|                               | Semicon Cupla SP Type                    | 119                         |
|                               | Semicon Cupla SCS Type                   | 120                         |
|                               | Semicon Cupla SCT Type                   | 122                         |
|                               | Semicon Cupla SCT Type                   | 121                         |
|                               | Small Cupla                              | 21                          |
|                               | SP Cupla Type A                          | 75                          |
|                               | SP-V Cupla                               | 127                         |
| T                             | Super Cupla                              | 27                          |
|                               | TSP Cupla                                | 71                          |
|                               | TSP Cupla with Ball Valve                | 73                          |
|                               | Twist Plug                               | 54                          |
| Z                             | Zerospill Cupla                          | 77                          |

For Low Pressure

# Micro Cupla

For piping in pneumatic control devices

Working pressure



Valve structure




Applicable fluids



**Compact, lightweight Cuplas with only 9.5 mm outer diameter.**  
**Push-to-connect operation. Tube Fitter type for even easier tube insertion.**

- Even though the valve is built in the socket, the sleeve outer diameter is confined to 9.5 mm.
- Push-to-connect design.
- Compact design for piping in narrow spaces.
- Plated brass and stainless steel bodies are available for excellent corrosion resistance.
- Available in various end configurations to satisfy a wide range of pneumatic applications.

Note: Fluid will flow out from the plug side when disconnected.  
 Take necessary precaution if the fluid is water.

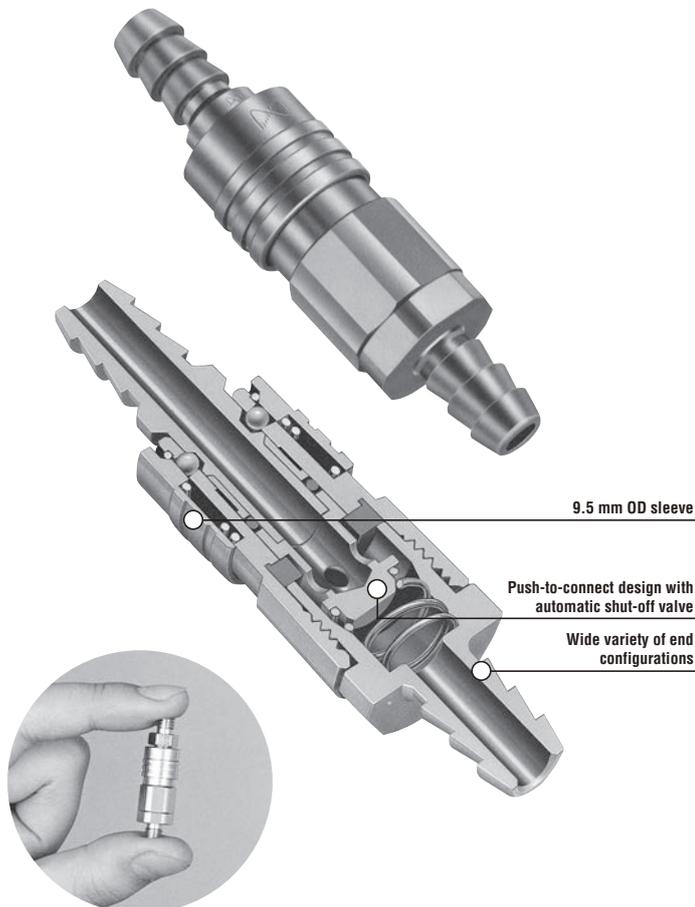

## Specifications


|                           |                         |   |                           |                       |
|---------------------------|-------------------------|---|---------------------------|-----------------------|
| Body material             |                         | Cupla : Brass (Plated), Stainless steel (SUS 304)<br>Tube Fitter Type : Brass (Chrome-plated)   |                           |                       |
| Size                      | Thread                  | 1/8", M5 x 0.8  |                           |                       |
|                           | Tube barb (Tube fitter) | Tube ID $\phi 3, \phi 4$<br>Polyurethane tube: Outside Dia. $\phi 4 \pm 0.1, \phi 6 \pm 0.1$<br>Polyamide tube: Outside Dia. $\phi 4^{+0.05}_{-0.08}, \phi 6^{+0.05}_{-0.08}$<br>Fluorine contained resin tube: Outside Dia. $\phi 4 \pm 0.05, \phi 6 \pm 0.07$ |                           |                       |
| Working pressure          | MPa                     | 1.0   |                           |                       |
|                           | kgf/cm <sup>2</sup>     | 10  |                           |                       |
|                           | bar                     | 10  |                           |                       |
|                           | PSI                     | 145   |                           |                       |
| Seal material             | Seal material           | Mark  | Working temperature range | Remarks               |
| Working temperature range | Nitrile rubber          | NBR (SG)  | -20°C to +80°C            | Standard material     |
|                           | Fluoro rubber           | FKM (X-100)   | -20°C to +180°C           | Made-to-order item(s) |

• Above specifications apply only to Cuplas. Working pressure, pressure resistance and working temperature range may vary depending on tube materials you use with and its working temperature range.  
 Micro Cupla with Tube Fitter has NBR packing material only.

## Max. Tightening Torque Nm (kgf·cm)

|               |          |        |
|---------------|----------|--------|
| Size (Thread) | M5 x 0.8 | 1/8"   |
| Torque        | 1.3 {13} | 7 {71} |

## Flow Direction

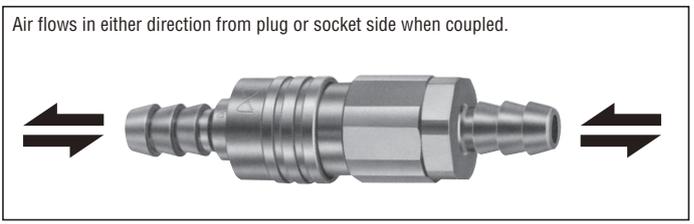

## Interchangeability

Sockets and plugs can be connected regardless of end configurations.

## Min. Cross-Sectional Area (mm<sup>2</sup>)


| Model                     | MC-03SP | MC-04SP | MC-05SP | MC-10SP | Tube Fitter Type for 4 mm OD tube | Tube Fitter Type for 6 mm OD tube |
|---------------------------|---------|---------|---------|---------|-----------------------------------|-----------------------------------|
| Min. cross-sectional area | 1.1     | 4.9     | 4.9     | 4.9     | 4.9                               | 4.9                               |

## Suitability for Vacuum 53.0 kPa (400 mmHg)

| Socket only | Plug only | When connected |
|-------------|-----------|----------------|
| —           | —         | Operational    |


## Pressure - Flow Characteristics

[Test conditions] • Fluid : Air • Temperature : Room temperature  
 • Tube size :  $\phi 4 \text{ mm} \times \phi 2 \text{ mm}, \phi 6 \text{ mm} \times \phi 4 \text{ mm}$  (Micro Cupla with Tube Fitter)

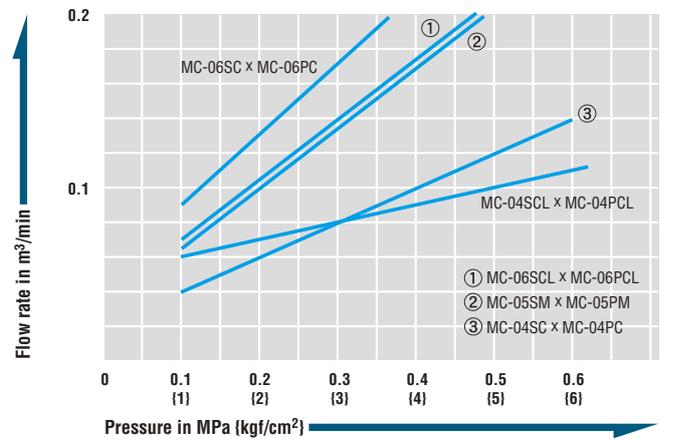

Models and Dimensions

**Plug PH type (Tube barb)**



| Model   | Application (Tube) | Body material•Mass (g) | Dimensions (mm) |     |   |     |     |     |
|---------|--------------------|------------------------|-----------------|-----|---|-----|-----|-----|
|         |                    | Brass                  | L               | C   | A | ∅H  | ∅T  | ∅B  |
| MC-03PH | 3 mm ID            | 1.2                    | 19              | 9.2 | 8 | 5.5 | 3.5 | 1.2 |
| MC-04PH | 4 mm ID            | 1.4                    | 19              | 9.2 | 8 | 5.5 | 4.8 | 2.5 |

**Plug PM type (Male thread)**




| Model   | Application | Body material•Mass (g) | Dimensions (mm) |     |     |        |        |     |
|---------|-------------|------------------------|-----------------|-----|-----|--------|--------|-----|
|         |             | Brass                  | L               | C   | A   | H(WAF) | T      | ∅B  |
| MC-05PM | M5 x 0.8    | 1.9                    | 17              | 9.2 | 4.5 | Hex.7  | M5x0.8 | 2.5 |

**Plug PM type (Male thread)**





| Model   | Application | Body material•Mass (g) | Dimensions (mm) |     |        |       |     |  |
|---------|-------------|------------------------|-----------------|-----|--------|-------|-----|--|
|         |             | Brass                  | L               | C   | H(WAF) | T     | ∅B  |  |
| MC-10PM | Rc 1/8      | 9                      | 26              | 9.2 | Hex.11 | R 1/8 | 2.5 |  |

**Plug PHL type (Tube barb)**

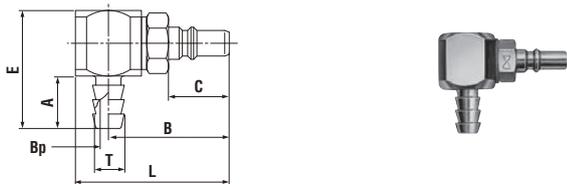

| Model    | Application (Tube) | Body material•Mass (g) | Dimensions (mm) |     |   |        |    |     |     |
|----------|--------------------|------------------------|-----------------|-----|---|--------|----|-----|-----|
|          |                    | Brass                  | L               | C   | A | B      | E  | ∅T  | ∅Bp |
| MC-04PHL | 4 mm ID            | 9.4                    | (23.3)          | 9.2 | 8 | (18.3) | 18 | 4.8 | 2.5 |


Application Example

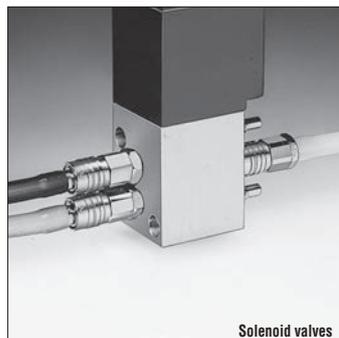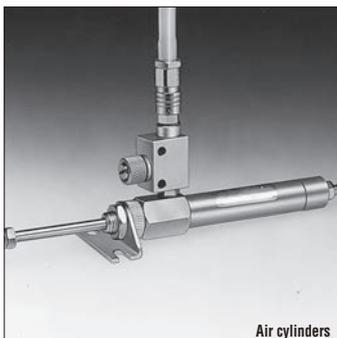

Always fix tubes with hose clamps when using hose barb types.


Always fix tubes with hose clamps when using hose barb types.

**Socket SH type (Tube barb)**

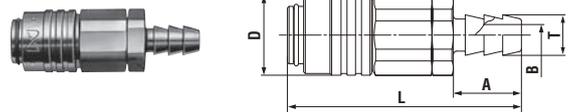


| Model   | Application (Tube) | Body material•Mass (g) | Dimensions (mm) |     |   |     |     |
|---------|--------------------|------------------------|-----------------|-----|---|-----|-----|
|         |                    | Brass                  | L               | ∅D  | A | ∅T  | ∅B  |
| MC-03SH | 3 mm ID            | 7                      | (27.5)          | 9.5 | 8 | 3.5 | 1.2 |
| MC-04SH | 4 mm ID            | 7.3                    | (27.5)          | 9.5 | 8 | 4.8 | 2.5 |

**Socket SM type (Male thread)**

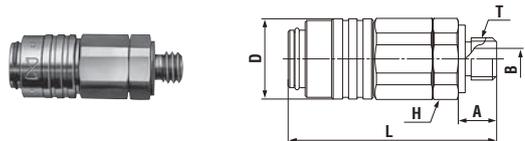


| Model   | Application | Body material•Mass (g) | Dimensions (mm) |     |     |        |        |     |
|---------|-------------|------------------------|-----------------|-----|-----|--------|--------|-----|
|         |             | Brass                  | L               | ∅D  | A   | T      | H(WAF) | ∅B  |
| MC-05SM | M5 x 0.8    | 7.4                    | (24.5)          | 9.5 | 4.5 | M5x0.8 | Hex.9  | 2.5 |

**Socket SM type (Male thread)**

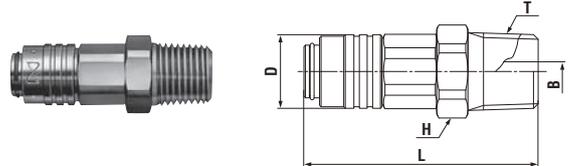


| Model   | Application | Body material•Mass (g) | Dimensions (mm) |     |       |        |    |
|---------|-------------|------------------------|-----------------|-----|-------|--------|----|
|         |             | Brass                  | L               | ∅D  | T     | H(WAF) | ∅B |
| MC-10SM | Rc 1/8      | 13.1                   | (30)            | 9.5 | R 1/8 | Hex.11 | 3  |

**Socket SHL type (Tube barb)**

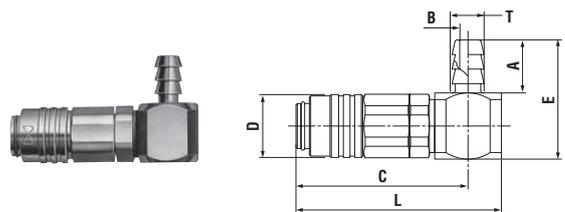

| Model    | Application (Tube) | Body material•Mass (g) | Dimensions (mm) |        |    |   |     |     |     |
|----------|--------------------|------------------------|-----------------|--------|----|---|-----|-----|-----|
|          |                    | Brass                  | L               | C      | E  | A | ∅D  | ∅T  | ∅B  |
| MC-04SHL | 4 mm ID            | 14.8                   | (30.8)          | (25.8) | 18 | 8 | 9.5 | 4.8 | 2.5 |

**Socket SHB type (For panel mounting)**

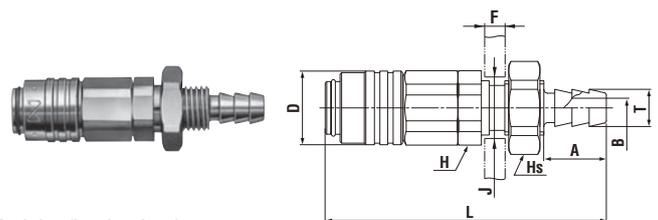

\* F and ∅J are dimensions of panel.


| Model    | Application (Tube) | Body material•Mass (g) | Dimensions (mm) |   |     |     |     |         |                     |        |            |
|----------|--------------------|------------------------|-----------------|---|-----|-----|-----|---------|---------------------|--------|------------|
|          |                    | Brass                  | L               | A | ∅D  | ∅T  | ∅B  | HS(WAF) | ∅J                  | H(WAF) | F          |
| MC-04SHB | 4 mm ID            | 11.5                   | (36)            | 8 | 9.5 | 4.8 | 2.5 | Hex.11  | 7.1 <sup>+0.3</sup> | Hex.9  | 1.2 to 3.5 |

**Plug PC type (With Tube Fitter)**




| Model   | Application (Tube) | Mass (g) | Dimensions (mm) |     |     |     |
|---------|--------------------|----------|-----------------|-----|-----|-----|
|         |                    |          | L               | C   | øT  | øB  |
| MC-04PC | 4 mm OD            | 3        | (21.7)          | 9.2 | 8   | 2.5 |
| MC-06PC | 6 mm OD            | 5        | (25)            | 9.2 | 9.8 | 2.5 |

**Plug PCL type (With L-shaped Tube Fitter)**

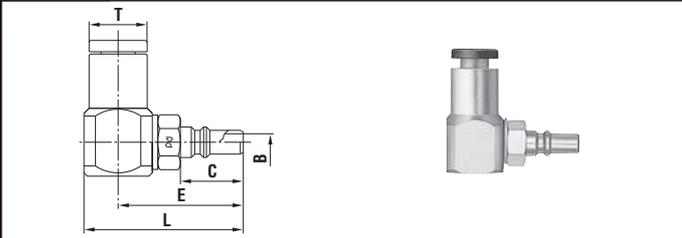


| Model    | Application (Tube) | Mass (g) | Dimensions (mm) |     |        |     |     |
|----------|--------------------|----------|-----------------|-----|--------|-----|-----|
|          |                    |          | L               | C   | E      | øT  | øB  |
| MC-04PCL | 4 mm OD            | 10       | (23.3)          | 9.2 | (18.3) | 8   | 2.5 |
| MC-06PCL | 6 mm OD            | 13.5     | (24.3)          | 9.2 | (18.8) | 9.8 | 2.5 |

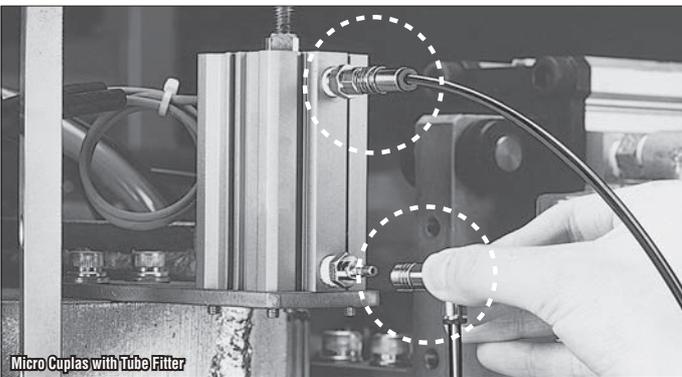


Micro Cuplas with Tube Fitter

**Socket SC type (With Tube Fitter)**

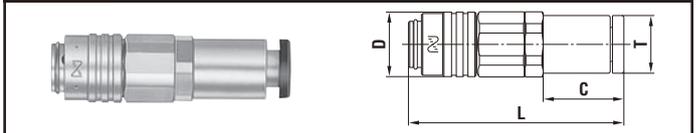


| Model   | Application (Tube) | Mass (g) | Dimensions (mm) |     |        |     |
|---------|--------------------|----------|-----------------|-----|--------|-----|
|         |                    |          | L               | øD  | C      | øT  |
| MC-04SC | 4 mm OD            | 9        | (31.5)          | 9.5 | (11.8) | 8   |
| MC-06SC | 6 mm OD            | 11.5     | (33.5)          | 9.5 | (12.5) | 9.8 |

**Socket SCL type (With L-shaped Tube Fitter)**

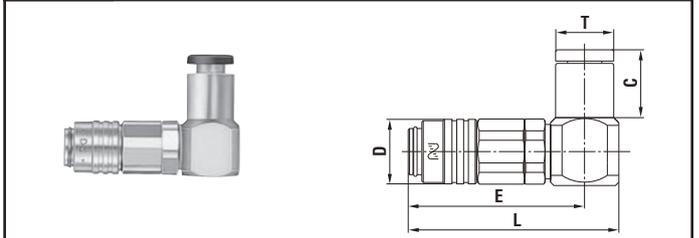

| Model    | Application (Tube) | Mass (g) | Dimensions (mm) |        |     |        |     |
|----------|--------------------|----------|-----------------|--------|-----|--------|-----|
|          |                    |          | L               | E      | øD  | C      | øT  |
| MC-04SCL | 4 mm OD            | 16       | (30.8)          | (25.8) | 9.5 | (10)   | 8   |
| MC-06SCL | 6 mm OD            | 19       | (31.8)          | (26.3) | 9.5 | (12.5) | 9.8 |

**Socket SCB type (With Tube Fitter for panel mounting)**

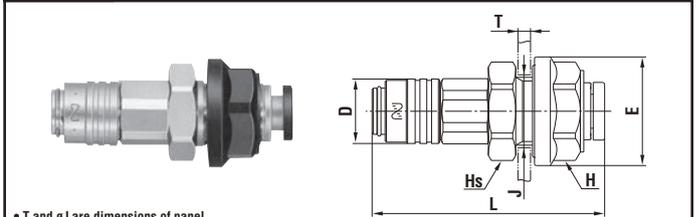


• T and øJ are dimensions of panel.

| Model    | Application (Tube) | Mass (g) | Dimensions (mm) |     |    |         |        |             |                                   |
|----------|--------------------|----------|-----------------|-----|----|---------|--------|-------------|-----------------------------------|
|          |                    |          | L               | øD  | øE | Hs(WAF) | H(WAF) | T           | øJ                                |
| MC-04SCB | 4 mm OD            | 15       | (34)            | 9.5 | 16 | Hex.13  | Hex.13 | 3.5 or less | 10.5 <sup>+0.3</sup> <sub>0</sub> |
| MC-06SCB | 6 mm OD            | 18.5     | (36)            | 9.5 | 18 | Hex.15  | Hex.15 | 3.5 or less | 12.5 <sup>+0.3</sup> <sub>0</sub> |

**Socket Micro Line Cupla with three branch ports**


• The branch body is made of aluminum alloy.

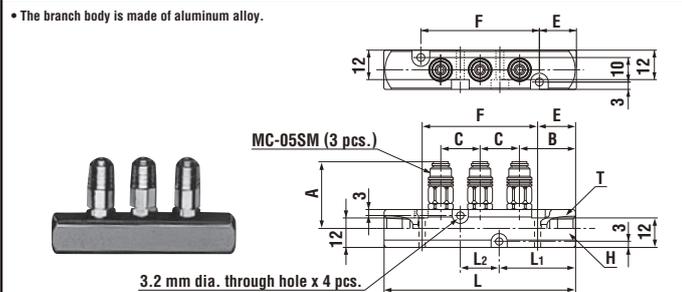

| Model | Mass (g) | Dimensions (mm) |                |                |        |    |    |    |    |          |        |
|-------|----------|-----------------|----------------|----------------|--------|----|----|----|----|----------|--------|
|       |          | L               | L <sub>1</sub> | L <sub>2</sub> | A      | B  | C  | E  | F  | T        | H(WAF) |
| MC-03 | 65       | 78              | 31             | 16             | (28.8) | 23 | 16 | 15 | 48 | 2xRc 1/8 | Box 16 |

**Socket Micro Line Cupla with 5 branch ports**


• The branch body is made of aluminum alloy.

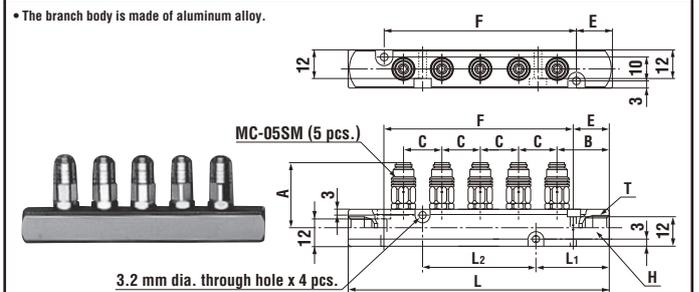

| Model | Mass (g) | Dimensions (mm) |                |                |        |    |    |    |    |          |        |
|-------|----------|-----------------|----------------|----------------|--------|----|----|----|----|----------|--------|
|       |          | L               | L <sub>1</sub> | L <sub>2</sub> | A      | B  | C  | E  | F  | T        | H(WAF) |
| MC-05 | 101      | 110             | 31             | 48             | (28.8) | 23 | 16 | 15 | 80 | 2xRc 1/8 | Box 16 |

**Socket Micro Line Cupla with 10 branch ports**

• The branch body is made of aluminum alloy.

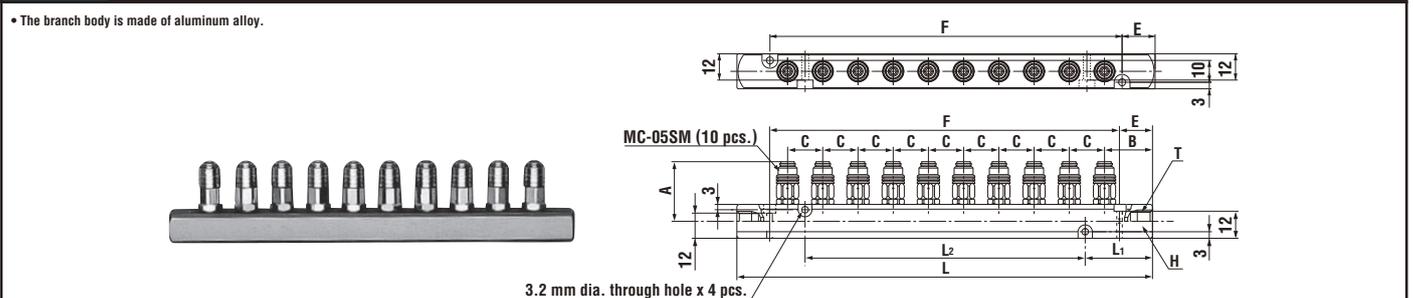


| Model | Mass (g) | Dimensions (mm) |                |                |        |    |    |    |     |          |        |
|-------|----------|-----------------|----------------|----------------|--------|----|----|----|-----|----------|--------|
|       |          | L               | L <sub>1</sub> | L <sub>2</sub> | A      | B  | C  | E  | F   | T        | H(WAF) |
| MC-10 | 187      | 190             | 31             | 128            | (28.8) | 23 | 16 | 15 | 160 | 2xRc 1/8 | Box 16 |

# Micro Cupla

## Stainless Steel Models


Highly Corrosion-resistant  
Stainless Steel Micro Cupla

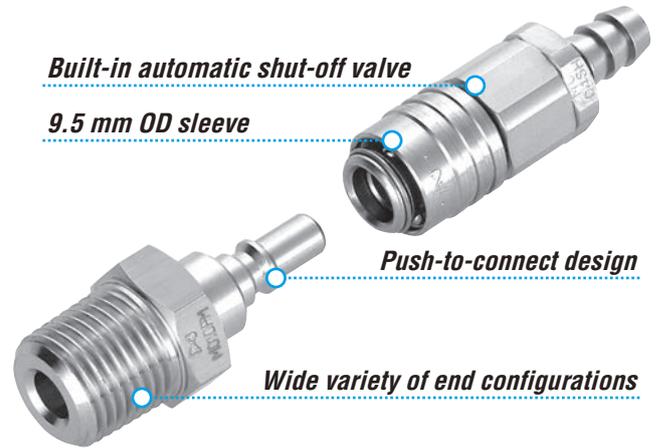

**Models and Dimensions (Stainless Steel)**


WAF : WAF stands for width across flats.

**Plug PH type (Hose barb)**

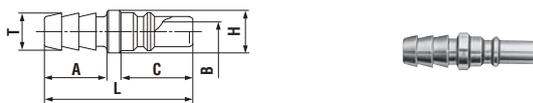

| Model   | Application (Tube) | Body material*Mass (g) | Dimensions (mm) |     |   |     |     |     |
|---------|--------------------|------------------------|-----------------|-----|---|-----|-----|-----|
|         |                    | Stainless steel        | L               | C   | A | øH  | øT  | øB  |
| MC-04PH | 4 mm ID            | 1.3                    | 19              | 9.2 | 8 | 5.5 | 4.8 | 2.5 |

**Socket SH type (Hose barb)**

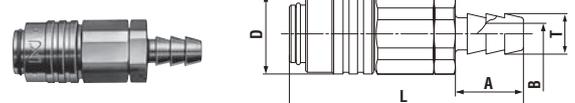


| Model   | Application (Tube) | Body material*Mass (g) | Dimensions (mm) |     |   |     |     |
|---------|--------------------|------------------------|-----------------|-----|---|-----|-----|
|         |                    | Stainless steel        | L               | øD  | A | øT  | øB  |
| MC-04SH | 4 mm ID            | 6.7                    | (27.5)          | 9.5 | 8 | 4.8 | 2.5 |

**Plug PM type (Male thread)**




| Model   | Application | Body material*Mass (g) | Dimensions (mm) |     |     |        |        |     |
|---------|-------------|------------------------|-----------------|-----|-----|--------|--------|-----|
|         |             | Stainless steel        | L               | C   | A   | H(WAF) | T      | øB  |
| MC-05PM | M5 x 0.8    | 2.2                    | 17              | 9.2 | 4.5 | Hex.8  | M5x0.8 | 2.5 |

**Socket SM type (Male thread)**

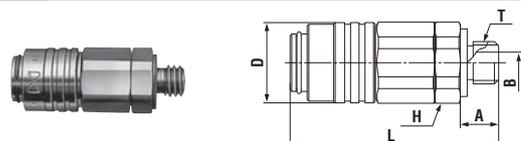


| Model   | Application | Body material*Mass (g) | Dimensions (mm) |     |     |        |        |     |
|---------|-------------|------------------------|-----------------|-----|-----|--------|--------|-----|
|         |             | Stainless steel        | L               | øD  | A   | T      | H(WAF) | øB  |
| MC-05SM | M5 x 0.8    | 6.8                    | (24.5)          | 9.5 | 4.5 | M5x0.8 | Hex.9  | 2.5 |

**Plug PM type (Male thread)**

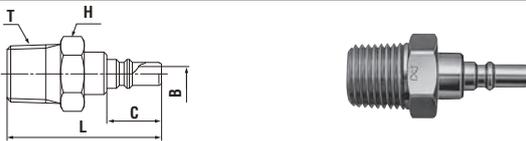


| Model   | Application | Body material*Mass (g) | Dimensions (mm) |     |        |       |     |
|---------|-------------|------------------------|-----------------|-----|--------|-------|-----|
|         |             | Stainless steel        | L               | C   | H(WAF) | T     | øB  |
| MC-10PM | Rc 1/8      | 8.1                    | 26              | 9.2 | Hex.11 | R 1/8 | 2.5 |

**Socket SM type (Male thread)**

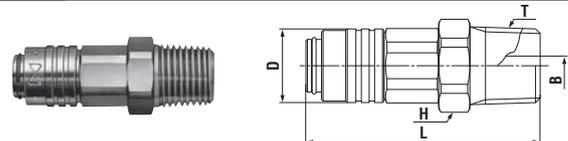


| Model   | Application | Body material*Mass (g) | Dimensions (mm) |     |       |        |    |
|---------|-------------|------------------------|-----------------|-----|-------|--------|----|
|         |             | Stainless steel        | L               | øD  | T     | H(WAF) | øB |
| MC-10SM | Rc 1/8      | 12.1                   | (30)            | 9.5 | R 1/8 | Hex.11 | 3  |

**Plug PHL type (Hose barb)**

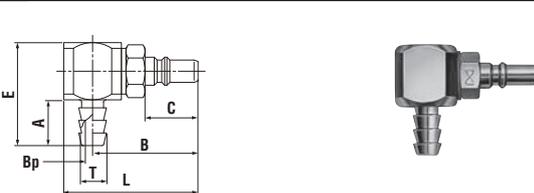


| Model    | Application (Tube) | Body material*Mass (g) | Dimensions (mm) |     |   |        |    |     |     |
|----------|--------------------|------------------------|-----------------|-----|---|--------|----|-----|-----|
|          |                    | Stainless steel        | L               | C   | A | B      | E  | øT  | øBp |
| MC-04PHL | 4 mm ID            | 9                      | (23.3)          | 9.2 | 8 | (18.3) | 18 | 4.8 | 2.5 |

**Socket SHL type (Hose barb)**

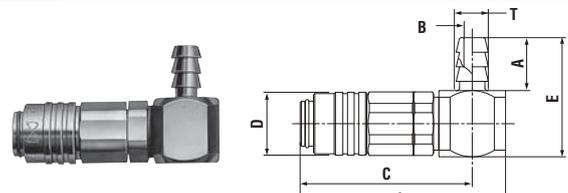

| Model    | Application (Tube) | Body material*Mass (g) | Dimensions (mm) |        |    |   |     |     |     |
|----------|--------------------|------------------------|-----------------|--------|----|---|-----|-----|-----|
|          |                    | Stainless steel        | L               | C      | E  | A | øD  | øT  | øB  |
| MC-04SHL | 4 mm ID            | 13.6                   | (30.8)          | (25.8) | 18 | 8 | 9.5 | 4.8 | 2.5 |

**Socket SHB type (For panel mounting)**

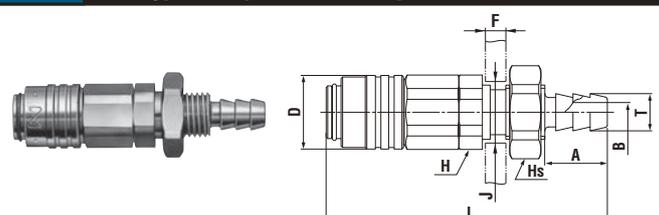

\* F and øJ are dimensions of panel.

| Model    | Application (Tube) | Body material*Mass (g) | Dimensions (mm) |   |     |     |     |         |                                  |        |            |  |
|----------|--------------------|------------------------|-----------------|---|-----|-----|-----|---------|----------------------------------|--------|------------|--|
|          |                    | Stainless steel        | L               | A | øD  | øT  | øB  | Hs(WAF) | øJ                               | H(WAF) | F          |  |
| MC-04SHB | 4 mm ID            | 10.6                   | (36)            | 8 | 9.5 | 4.8 | 2.5 | Hex.11  | 7.1 <sup>+0.3</sup> <sub>0</sub> | Hex.9  | 1.2 to 3.5 |  |

Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.

For Low Pressure

# Small Cupla


Lightweight and compact for use on air lines and scientific equipment

|   |   |  |
|---|---|--|
| <b>Working pressure</b><br><br>1.0 MPa<br>(10 kgf/cm <sup>2</sup> ) | <b>Valve structure</b><br><br>One-way shut-off | <b>Applicable fluids</b><br> Air<br> Water (Tube Fitter type is unsuitable for water.) |
|---|---|--|

**Lightweight and compact push-to-connect operation.**  
**Responding to requirements of modular combinations.**

- Compact socket with built-in valve and 14 mm OD sleeve. Suits applications calling for compact and modular components.
- Just push in the plug to the socket for connection by easy one hand operation.
- Chrome-plated brass for corrosion resistance adopted for the body. Stable performance for long life.
- A wide line-up of end configurations (female and male threads, hose barbs, manifolds) enables suitability with a wide range of piping applications such as pneumatic, scientific and medical equipment.
- Also available with quick connect/disconnect Tube Fitter type.

Note: Fluid will flow out from the plug side when disconnected. Take necessary precaution if the fluid is water.

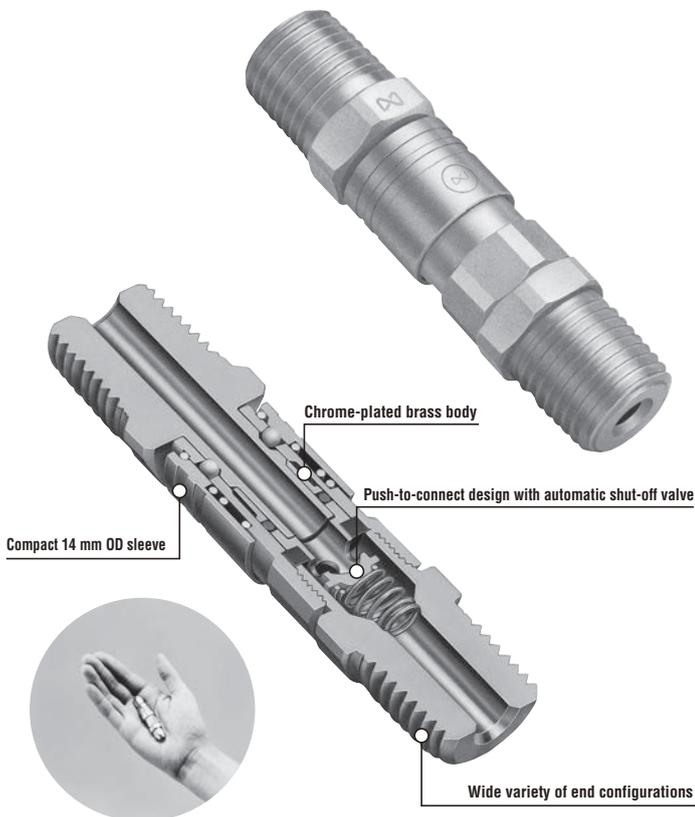

## Specifications

|                                  |                                |  |                                  |                   |
|----------------------------------|--------------------------------|--|----------------------------------|-------------------|
| <b>Body material</b>             |                                | Cupla : Brass (Chrome-plated)<br>Tube Fitter Type: Brass (Nickel-plated)   |                                  |                   |
| <b>Size</b>                      | <b>Thread</b>                  | 1/8", 1/4"   |                                  |                   |
|                                  | <b>Hose barb</b>               | Polyamide hose: $\phi 4 \times \phi 6$ , $\phi 4.5 \times \phi 6$<br>Urethane hose: $\phi 4 \times \phi 6$   |                                  |                   |
|                                  | <b>Tube barb (Tube fitter)</b> | Polyurethane tube: Outside Dia. $\phi 6 \pm 0.1$ , $\phi 8 \pm 0.15$<br>Polyamide tube: Outside Dia. $\phi 6^{+0.05}_{-0.08}$ , $\phi 8^{+0.05}_{-0.1}$<br>Fluorine contained resin tube: Outside Dia. $\phi 6 \pm 0.07$ , $\phi 8 \pm 0.07$ |                                  |                   |
| <b>Working pressure</b>          | MPa                            | 1.0  |                                  |                   |
|                                  | kgf/cm <sup>2</sup>            | 10   |                                  |                   |
|                                  | bar                            | 10   |                                  |                   |
|                                  | PSI                            | 145  |                                  |                   |
| <b>Seal material</b>             | <b>Seal material</b>           | <b>Mark</b>  | <b>Working temperature range</b> | <b>Remarks</b>    |
| <b>Working temperature range</b> | Nitrile rubber                 | NBR (SG)   | -20°C to +80°C                   | Standard material |

\* Above specifications apply only to Cuplas. Working pressure, pressure resistance and working temperature range may vary depending on tube materials you use with and its working temperature range.

## Max. Tightening Torque

| Size (Thread) | 1/8"   | 1/4"   | PN • SN Type |
|---------------|--------|--------|--------------|
| Torque        | 7 (71) | 9 (92) | 5 (51)       |

## Flow Direction

Air flows in either direction from plug or socket side when coupled.



## Interchangeability

Sockets and plugs can be connected regardless of end configurations.

## Min. Cross-Sectional Area


| Model                     | MS-10SM<br>X<br>MS-10PM | MS-20SM<br>X<br>MS-20PM | MS-40SN<br>X<br>MS-40PN | MS-45SN<br>X<br>MS-45PN | Tube Fitter Type<br>for 6 mm OD<br>tube | Tube Fitter Type<br>for 8 mm OD<br>tube |
|---------------------------|-------------------------|-------------------------|-------------------------|-------------------------|---|---|
| Min. cross-sectional area | 12.5                    | 12.5                    | 4.9                     | 7                       | 12.5                                    | 12.5                                    |

## Suitability for Vacuum

| Socket only | Plug only | When connected |
|-------------|-----------|----------------|
| —           | —         | Operational    |


## Pressure - Flow Characteristics

[Test conditions] • Fluid : Air • Temperature : Room temperature  
• Tube size :  $\phi 6 \text{ mm} \times \phi 4 \text{ mm}$ ,  $\phi 8 \text{ mm} \times \phi 6 \text{ mm}$  (Small Cupla with Tube Fitter)

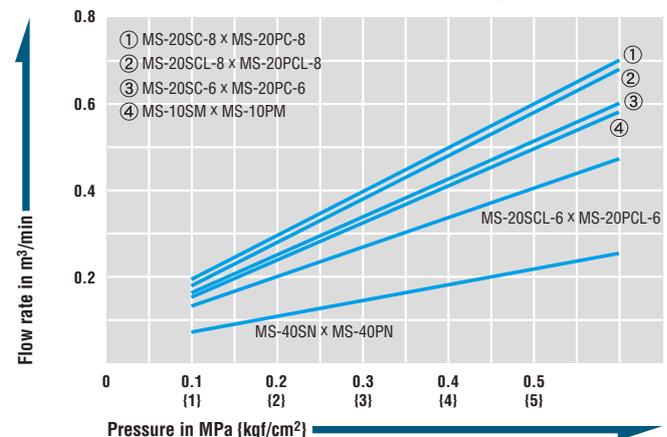


Models and Dimensions

**Plug PN type (For connection to hose)**

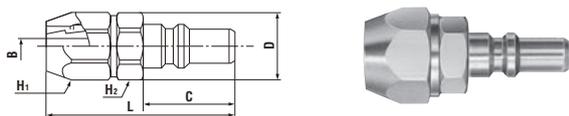


| Model   | Application (Hose)                                      | Mass (g) | Dimensions (mm) |      |    |         |         |     |
|---------|---|----------|-----------------|------|----|---------|---------|-----|
|         |   |          | L               | C    | ∅D | H1(WAF) | H2(WAF) | ∅B  |
| MS-40PN | ∅4 mm x ∅6 mm Polyamide                                 | 10.5     | (31)            | 15.2 | 11 | Hex.10  | Hex.10  | 2.5 |
| MS-45PN | ∅4.5 mm x ∅6 mm Polyamide<br>∅4 mm x ∅6 mm Polyurethane | 11       | (31)            | 15.2 | 11 | Hex.10  | Hex.10  | 3   |

**Plug PM type (Male thread)**

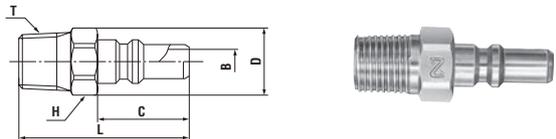


| Model   | Application | Mass (g) | Dimensions (mm) |      |      |        |       |    |
|---------|-------------|----------|-----------------|------|------|--------|-------|----|
|         |             |          | L               | ∅D   | C    | H(WAF) | T     | ∅B |
| MS-10PM | Rc 1/8      | 9        | 28.5            | 12   | 15.2 | Hex.11 | R 1/8 | 4  |
| MS-20PM | Rc 1/4      | 19.5     | 32.5            | 15.2 | 15.2 | Hex.14 | R 1/4 | 4  |

**Plug PF type (Female thread)**

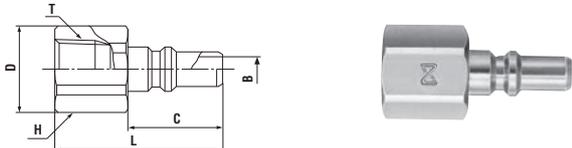


| Model   | Application | Mass (g) | Dimensions (mm) |    |      |        |        |    |
|---------|-------------|----------|-----------------|----|------|--------|--------|----|
|         |             |          | L               | ∅D | C    | H(WAF) | T      | ∅B |
| MS-10PF | R 1/8       | 11       | 27              | 14 | 15.2 | Hex.13 | Rc 1/8 | 4  |

**Plug PC type (Tube Fitter)**

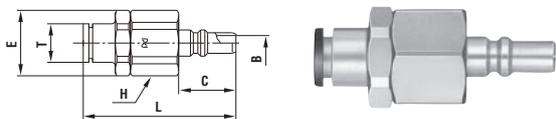

| Model     | Application (Tube) | Mass (g) | Dimensions (mm) |      |      |        |      |    |
|-----------|--------------------|----------|-----------------|------|------|--------|------|----|
|           |                    |          | L               | C    | ∅E   | H(WAF) | ∅T   | ∅B |
| MS-20PC-6 | 6 mm OD            | 26.5     | (40.5)          | 15.2 | 17.5 | Hex.16 | 10.3 | 4  |
| MS-20PC-8 | 8 mm OD            | 31       | (47.5)          | 15.2 | 17.5 | Hex.16 | 13.5 | 4  |


**Plug PCL type (L-shaped Tube Fitter)**

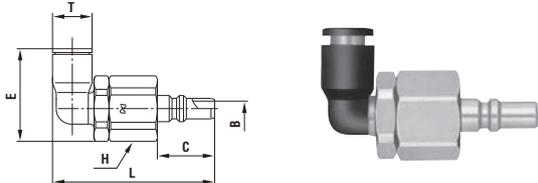

| Model      | Application (Tube) | Mass (g) | Dimensions (mm) |      |        |        |      |    |
|------------|--------------------|----------|-----------------|------|--------|--------|------|----|
|            |                    |          | L               | C    | E      | H(WAF) | ∅T   | ∅B |
| MS-20PCL-6 | 6 mm OD            | 27.5     | (43)            | 15.2 | (24.8) | Hex.16 | 10.5 | 4  |
| MS-20PCL-8 | 8 mm OD            | 32       | (46.5)          | 15.2 | (31.8) | Hex.16 | 13.5 | 4  |


**Socket MS-5 type (Small Line Cupla with 5 branch ports)**

• The branch body is made of aluminum alloy.

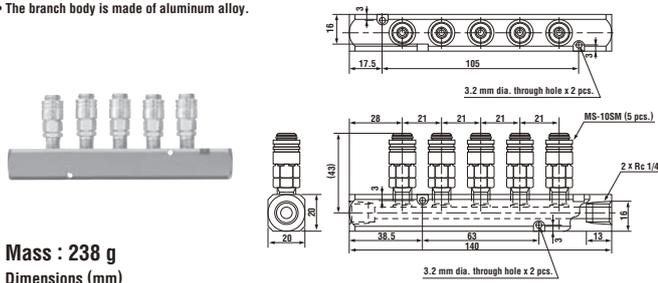


Mass : 238 g  
Dimensions (mm)

**Socket SN type (For connection to hose)**

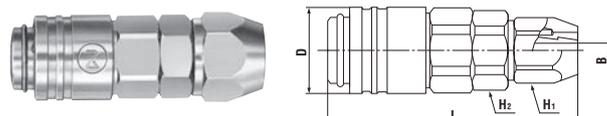


| Model   | Application (Hose)                                      | Mass (g) | Dimensions (mm) |         |         |    |     |
|---------|---|----------|-----------------|---------|---------|----|-----|
|         |   |          | L               | H1(WAF) | H2(WAF) | ∅D | ∅B  |
| MS-40SN | ∅4 mm x ∅6 mm Polyamide                                 | 26.5     | (40.8)          | Hex.10  | Hex.12  | 14 | 2.5 |
| MS-45SN | ∅4.5 mm x ∅6 mm Polyamide<br>∅4 mm x ∅6 mm Polyurethane | 27.0     | (40.8)          | Hex.10  | Hex.12  | 14 | 3   |

**Socket SM type (Male thread)**

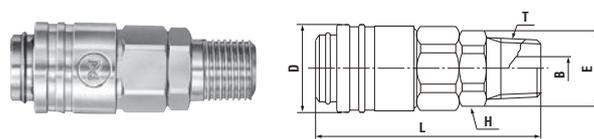


| Model   | Application | Mass (g) | Dimensions (mm) |        |       |    |      |    |
|---------|-------------|----------|-----------------|--------|-------|----|------|----|
|         |             |          | L               | H(WAF) | T     | ∅D | ∅E   | ∅B |
| MS-10SM | Rc 1/8      | 24       | (36.8)          | Hex.12 | R 1/8 | 14 | 13.2 | 4  |
| MS-20SM | Rc 1/4      | 34       | (40.8)          | Hex.14 | R 1/4 | 14 | 15.2 | 4  |

**Socket SF type (Female thread)**

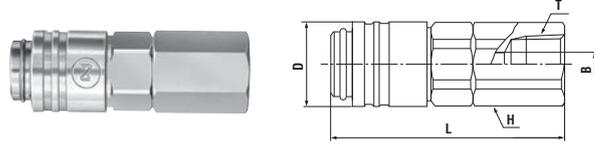


| Model   | Application | Mass (g) | Dimensions (mm) |        |        |    |    |
|---------|-------------|----------|-----------------|--------|--------|----|----|
|         |             |          | L               | H(WAF) | T      | ∅D | ∅B |
| MS-10SF | R 1/8       | 29.5     | (38.8)          | Hex.13 | Rc 1/8 | 14 | 4  |

**Socket SC type (Tube Fitter)**

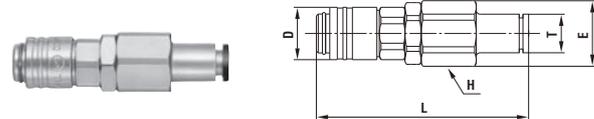


| Model     | Application (Tube) | Mass (g) | Dimensions (mm) |    |      |        |      |
|-----------|--------------------|----------|-----------------|----|------|--------|------|
|           |                    |          | L               | ∅D | ∅E   | H(WAF) | ∅T   |
| MS-20SC-6 | 6 mm OD            | 46       | (56.3)          | 14 | 17.5 | Hex.16 | 10.3 |
| MS-20SC-8 | 8 mm OD            | 50.5     | (60.8)          | 14 | 17.5 | Hex.16 | 13.5 |

**Socket SCL type (L-shaped Tube Fitter)**

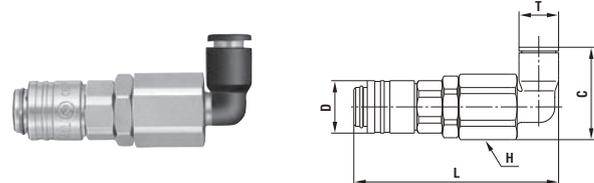

| Model      | Application (Tube) | Mass (g) | Dimensions (mm) |    |        |        |      |
|------------|--------------------|----------|-----------------|----|--------|--------|------|
|            |                    |          | L               | ∅D | C      | H(WAF) | ∅T   |
| MS-20SCL-6 | 6 mm OD            | 47.5     | (56.8)          | 14 | (24.8) | Hex.16 | 10.5 |
| MS-20SCL-8 | 8 mm OD            | 49.5     | (59.8)          | 14 | (31.8) | Hex.16 | 13.5 |

**Socket SCB type (Tube Fitter for panel mounting)**

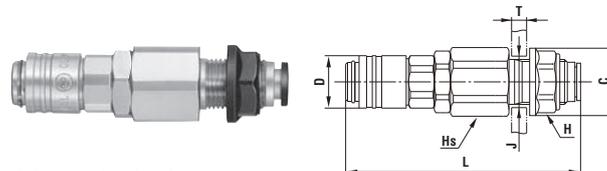

• T and ∅J are dimensions of panel.

| Model      | Application (Tube) | Mass (g) | Dimensions (mm) |    |    |         |        |           |                                   |
|------------|--------------------|----------|-----------------|----|----|---------|--------|-----------|-----------------------------------|
|            |                    |          | L               | ∅D | ∅C | Hs(WAF) | H(WAF) | T         | ∅J                                |
| MS-20SCB-6 | 6 mm OD            | 57.5     | (61.3)          | 14 | 18 | Hex.17  | Hex.15 | 7 or less | 12.5 <sup>+0.3</sup> <sub>0</sub> |
| MS-20SCB-8 | 8 mm OD            | 58.5     | (62.8)          | 14 | 21 | Hex.17  | Hex.18 | 8 or less | 15.5 <sup>+0.3</sup> <sub>0</sub> |

For Low Pressure

# Compact Cupla

Small multipurpose type for low pressure lines

Working pressure



1.0 MPa  
(10 kgf/cm<sup>2</sup>)

Valve structure



Two-way shut-off

Applicable fluids



Air

Water

## Compact 17.5 mm outer diameter, yet socket and plug have built-in automatic shut-off valves.

- Both socket and plug have built-in automatic shut-off valves.
- Compact size with max. outer dia. 17.5 mm.
- For small bore piping from temperature control piping to scientific equipment.
- Body materials in stainless steel (SUS304) or brass, excellent in corrosion resistance.
- Four types of end configuration enable suitability with a wide range of piping applications.



### Specifications

|  |                           |                                    |                           |                      |
|--|---------------------------|------------------------------------|---------------------------|----------------------|
| Body material                                    |                           | Brass, Stainless steel (SUS 304)   |                           |                      |
| Size   | Thread                    | 1/8"                               |                           |                      |
|  | Tube barb                 | Polyamide tube : ø4 x ø6, ø6 x ø8  |                           |                      |
|  |                           | Polyolefin tube : ø4 x ø6, ø6 x ø8 |                           |                      |
| Fluorine contained resin tube : ø4 x ø6, ø6 x ø8 |                           |                                    |                           |                      |
| Working pressure                                 | MPa                       | 1.0                                |                           |                      |
|  | kgf/cm <sup>2</sup>       | 10                                 |                           |                      |
|  | bar                       | 10                                 |                           |                      |
|  | PSI                       | 145                                |                           |                      |
| Seal material                                    | Seal material             | Mark                               | Working temperature range | Remarks              |
| Working temperature range                        | Fluoro rubber             | FKM                                | -20°C to +180°C           | Standard material    |
|  | Ethylene-propylene rubber | EPDM                               | -40°C to +150°C           | Available on request |

Note: Working pressure and working temperature of nut type depend on the tube material and its dimensional tolerance.

### Max. Tightening Torque

N m (kgf-cm)

|               |                 |        |           |
|---------------|-----------------|--------|-----------|
| Size (Thread) | 1/8"            |        | Tube barb |
| Torque        | Brass           | 5 (51) | 5 (51)    |
|               | Stainless steel | 9 (92) | 7 (71)    |

### Flow Direction

Fluid may flow in either direction from plug or from socket side when coupled.



### Interchangeability

Socket and plug of Compact Cupla can be connected regardless of end configurations.

### Min. Cross-Sectional Area

(mm<sup>2</sup>)

|                           |                 |                 |                   |                   |
|---------------------------|-----------------|-----------------|-------------------|-------------------|
| Model                     | CO-1SM x CO-1PM | CO-1SF x CO-1PF | CO-40SN x CO-40PN | CO-60SN x CO-60PN |
| Min. cross-sectional area | 8.8             | 8.8             | 4.9               | 8.8               |

### Suitability for Vacuum

1.3 x 10<sup>-1</sup> Pa (1 x 10<sup>-3</sup> mmHg)

|             |           |                |
|-------------|-----------|----------------|
| Socket only | Plug only | When connected |
| —           | —         | Operational    |

### Admixture of Air on Connection

Admixture of air may vary depending upon the usage conditions.

(mL)

|                         |      |
|-------------------------|------|
| Volume of air admixture | 0.34 |
|-------------------------|------|

### Volume of Spillage per Disconnection


Volume of spillage may vary depending upon the usage conditions.

(mL)

|                    |      |
|--------------------|------|
| Volume of spillage | 0.23 |
|--------------------|------|


### Flow Rate – Pressure Loss Characteristics

[Test conditions] • Fluid : Water • Temperature : 20°C ± 5°C

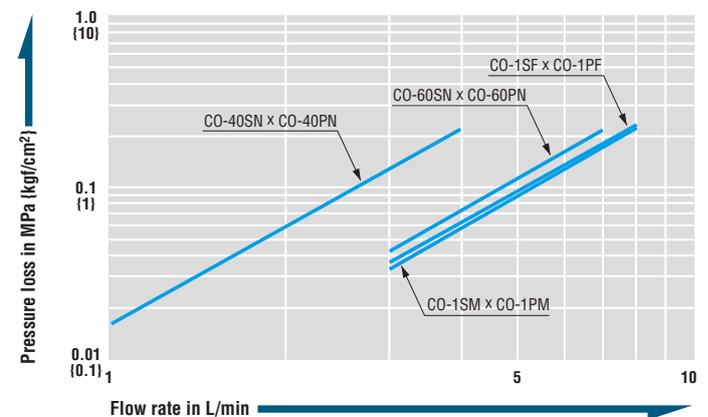


Models and Dimensions

**Plug PM type (Male thread)**

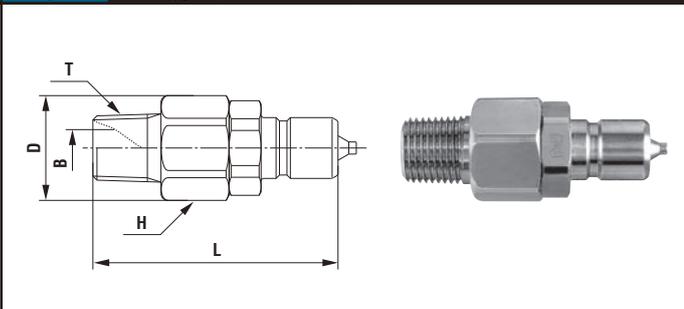


| Model  | Application | Body material, Mass (g) |                 | Dimensions (mm) |      |         |       |     |
|--------|-------------|-------------------------|-----------------|-----------------|------|---------|-------|-----|
|        |             | Brass                   | Stainless steel | L               | øD   | H (WAF) | T     | øB  |
| CO-1PM | Rc 1/8      | 20                      | 19              | (36)            | 15.5 | Hex.14  | R 1/8 | 5.5 |

**Socket SM type (Male thread)**

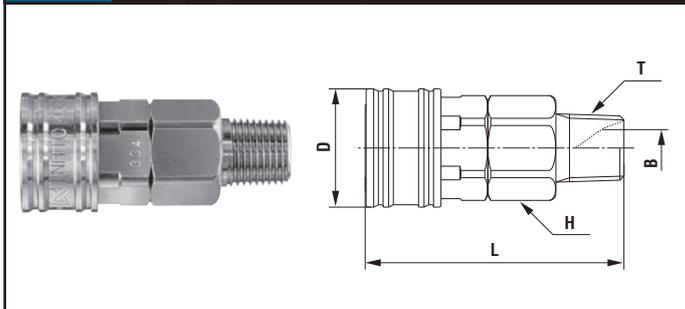


| Model  | Application | Body material, Mass (g) |                 | Dimensions (mm) |      |         |       |     |
|--------|-------------|-------------------------|-----------------|-----------------|------|---------|-------|-----|
|        |             | Brass                   | Stainless steel | L               | øD   | H (WAF) | T     | øB  |
| CO-1SM | Rc 1/8      | 34                      | 32              | (38)            | 17.5 | Hex.14  | R 1/8 | 5.5 |

**Plug PF type (Female thread)**

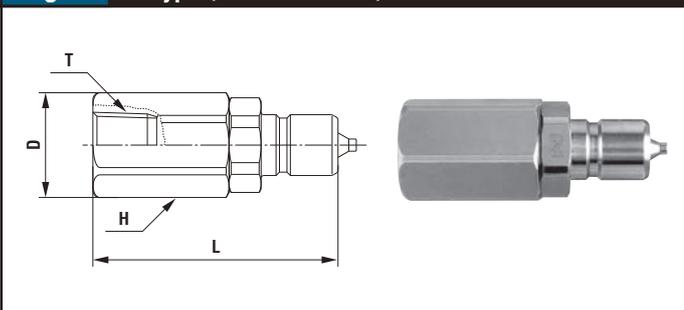


| Model  | Application | Body material, Mass (g) |                 | Dimensions (mm) |      |         |        |
|--------|-------------|-------------------------|-----------------|-----------------|------|---------|--------|
|        |             | Brass                   | Stainless steel | L               | øD   | H (WAF) | T      |
| CO-1PF | R 1/8       | 25                      | 23              | (36)            | 15.5 | Hex.14  | Rc 1/8 |

**Socket SF type (Female thread)**

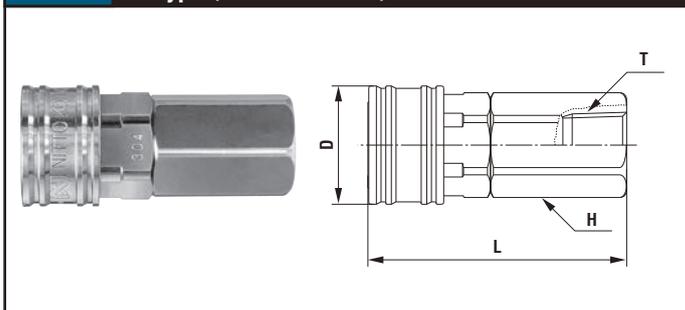


| Model  | Application | Body material, Mass (g) |                 | Dimensions (mm) |      |         |        |
|--------|-------------|-------------------------|-----------------|-----------------|------|---------|--------|
|        |             | Brass                   | Stainless steel | L               | øD   | H (WAF) | T      |
| CO-1SF | R 1/8       | 39                      | 36              | (38)            | 17.5 | Hex.14  | Rc 1/8 |

**Plug PN type (For connection to tube)**

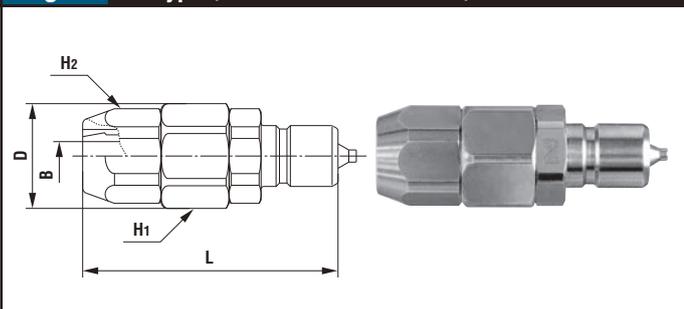

| Model   | Application (Tube) | Body material, Mass (g) |                 | Dimensions (mm) |      |          |          |     |
|---------|--------------------|-------------------------|-----------------|-----------------|------|----------|----------|-----|
|         |                    | Brass                   | Stainless steel | L               | øD   | H1 (WAF) | H2 (WAF) | øB  |
| CO-40PN | ø4 x ø6            | 23                      | 22              | (38.5)          | 15.5 | Hex.14   | Hex.10   | 2.5 |
| CO-60PN | ø6 x ø8            | 25                      | 24              | (37.5)          | 15.5 | Hex.14   | Hex.13   | 4.2 |


**Socket SN type (For connection to tube)**

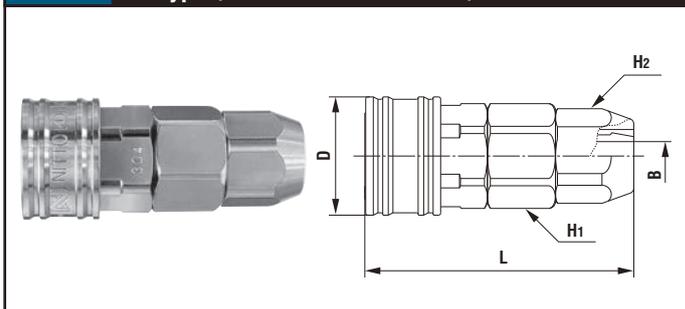

| Model   | Application (Tube) | Body material, Mass (g) |                 | Dimensions (mm) |      |          |          |     |
|---------|--------------------|-------------------------|-----------------|-----------------|------|----------|----------|-----|
|         |                    | Brass                   | Stainless steel | L               | øD   | H1 (WAF) | H2 (WAF) | øB  |
| CO-40SN | ø4 x ø6            | 38                      | 35              | (40.5)          | 17.5 | Hex.14   | Hex.10   | 2.5 |
| CO-60SN | ø6 x ø8            | 40                      | 37              | (39.5)          | 17.5 | Hex.14   | Hex.13   | 4.2 |


No difference in dimensions of brass and stainless steel Cupla  
Before use, please be sure to read "Instruction Sheet" that comes with the products.

Application Example

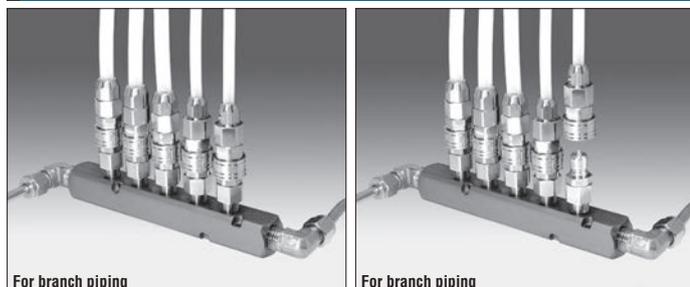

For branch piping

For branch piping

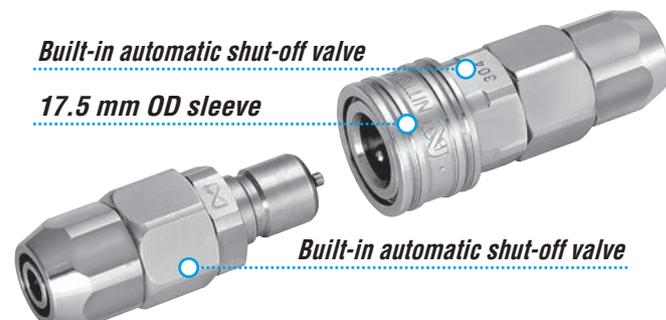

Built-in automatic shut-off valve

17.5 mm OD sleeve

Built-in automatic shut-off valve

For Low Pressure

# Cube Cupla


Small and lightweight coupling for air supply lines to medical and/or scientific equipment

|  |  |  |
|--|--|--|
| <b>Working pressure</b><br>1.0<br>1.0 MPa<br>(10 kgf/cm <sup>2</sup> ) | <b>Valve structure</b><br>Two-way shut-off<br>One-way shut-off<br>Straight through | <b>Applicable fluids</b><br>Air<br>Water |
|--|--|--|

Both socket and plug have built-in valve types and valveless types. Simple one action for connection or disconnection. Lightweight plastic coupling.

- Ultra-lightweight, made of polyacetal resin.
- Compact design for space saving.
- Just push plug into socket for connection. Simply press the button on the socket for disconnection.
- Suitable for a wide range of applications from medical/scientific equipment to beverage machines or semiconductor manufacturing devices.
- Socket and plug cannot be disconnected unless two buttons on the socket are pressed simultaneously.

Note: When valveless type socket or plug is used, fluid will flow out of it when disconnected. Take necessary precaution if the fluid is water.

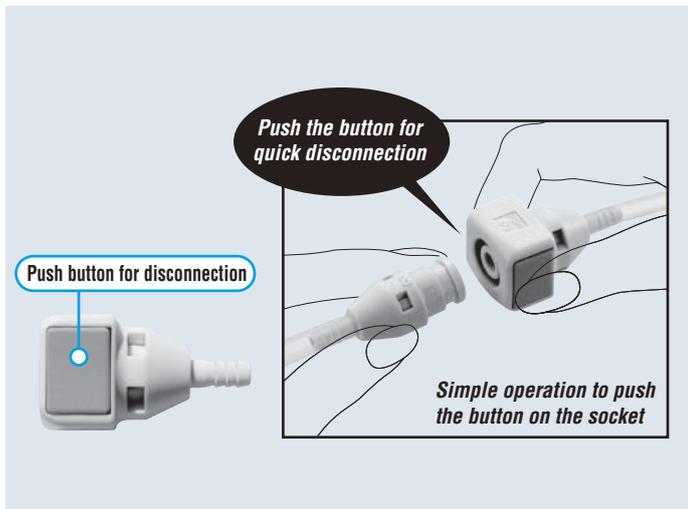

| Specifications   |                               |      |          |                           |                |         |                   |
|------------------|-------------------------------|------|----------|---------------------------|----------------|---------|-------------------|
| Body material    | Polyacetal resin (POM)        |      |          |                           |                |         |                   |
| Size             | 4 mm and 6 mm ID tube, Rc 1/8 |      |          |                           |                |         |                   |
| Working pressure | MPa                           | 1.0  |          |                           |                |         |                   |
|                  | kgf/cm <sup>2</sup>           | 10   |          |                           |                |         |                   |
|                  | bar                           | 10   |          |                           |                |         |                   |
|                  | PSI                           | 145  |          |                           |                |         |                   |
| Seal material    | Nitrile rubber                | Mark | NBR (SG) | Working temperature range | -20°C to +60°C | Remarks | Standard material |

| Max. Tightening Torque |          | Nm (kgf·cm) |
|------------------------|----------|-------------|
| Size (Thread)          | 1/8"     |             |
| Torque                 | 1.3 (13) |             |


**Flow Direction**

Fluid may flow in either direction from plug or from socket side when coupled.

**Interchangeability**  
Can be connected with plug and socket for Cube Cupla of the same type regardless of end configurations. However, built-in valve sockets cannot be connected with valveless plugs.

| Min. Cross-Sectional Area | (mm <sup>2</sup> ) |            |      |                  |                  |         |
|---------------------------|--------------------|------------|------|------------------|------------------|---------|
| Model                     | 04PH/04PHB         | 06PH/06PHB | 10PM | 04PH-VL/04PHB-VL | 06PH-VL/06PHB-VL | 10PM-VL |
| SPC-04SH                  | 5                  | 5          | 5    | —                | —                | —       |
| SPC-06SH                  | 5                  | 8.6        | 8.6  | —                | —                | —       |
| SPC-10SM                  | 5                  | 8.6        | 8.6  | —                | —                | —       |
| SPC-04SH-VL               | 5                  | 5          | 5    | 5                | 5                | 5       |
| SPC-06SH-VL               | 5                  | 8.6        | 8.6  | 5                | 10.2             | 10.2    |
| SPC-10SM-VL               | 5                  | 8.6        | 8.6  | 5                | 10.2             | 16.6    |

| Suitability for Vacuum |           |                | 53.0 kPa (400 mmHg) |
|------------------------|-----------|----------------|---------------------|
| Socket only            | Plug only | When connected |                     |
| —                      | —         | Operational    |                     |

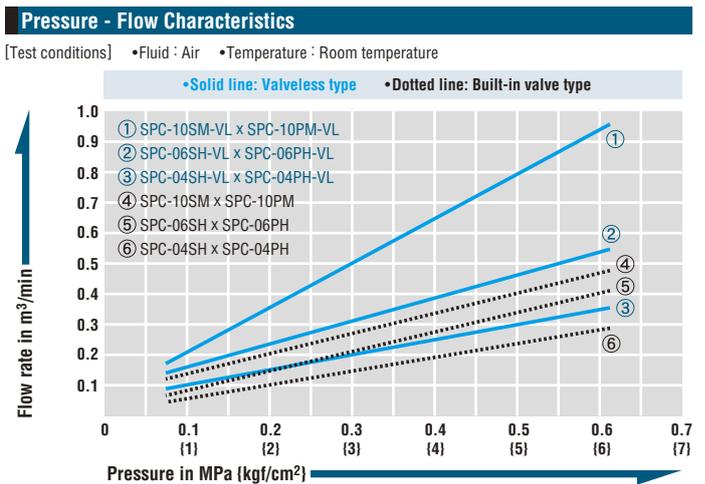


**Connection capability** Select the combination of models suitable to your applications

| Connection capability |         | Plug                 |                      |
|-----------------------|---------|----------------------|----------------------|
| Valve                 |         | With                 | Without              |
| Socket                | With    | <br>Two-way shut-off | Not connectable      |
|                       | Without | <br>One-way shut-off | <br>Straight through |


Models and Dimensions

**Plug PH type (Hose barb)**

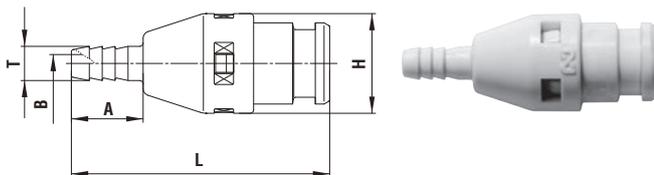


| Model       | Application (Tube) | Built-in valve | Mass (g) | Dimensions (mm) |    |    |     |     |
|-------------|--------------------|----------------|----------|-----------------|----|----|-----|-----|
|             |                    |                |          | L               | A  | øH | øT  | øB  |
| SPC-04PH    | 4 mm ID            | With           | 3.1      | (36)            | 10 | 14 | 4.8 | 2.5 |
| SPC-04PH-VL | 4 mm ID            | Without        | 2.6      | (36)            | 10 | 14 | 4.8 | 2.5 |
| SPC-06PH    | 6 mm ID            | With           | 3.4      | (40)            | 15 | 14 | 7   | 3.6 |
| SPC-06PH-VL | 6 mm ID            | Without        | 2.9      | (40)            | 15 | 14 | 7   | 3.6 |

**Socket SH type (Hose barb)**

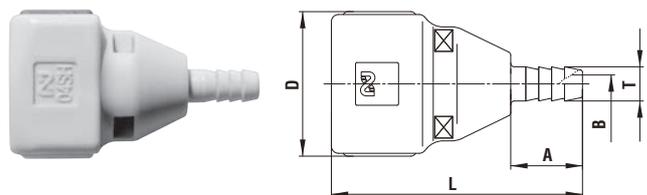


| Model       | Application (Tube) | Built-in valve | Mass (g) | Dimensions (mm) |    |        |     |     |
|-------------|--------------------|----------------|----------|-----------------|----|--------|-----|-----|
|             |                    |                |          | L               | A  | D      | øT  | øB  |
| SPC-04SH    | 4 mm ID            | With           | 6.5      | 35              | 10 | (20.3) | 4.8 | 2.5 |
| SPC-04SH-VL | 4 mm ID            | Without        | 6.1      | 35              | 10 | (20.3) | 4.8 | 2.5 |
| SPC-06SH    | 6 mm ID            | With           | 7.0      | 40              | 15 | (20.3) | 7   | 3.6 |
| SPC-06SH-VL | 6 mm ID            | Without        | 6.6      | 40              | 15 | (20.3) | 7   | 3.6 |

**Plug PM type (Male thread)**

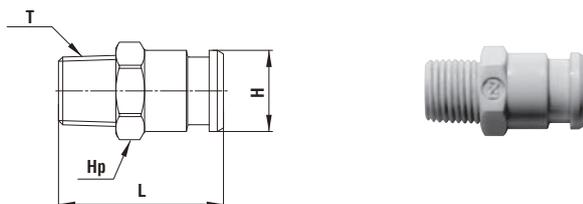


| Model       | Application | Built-in valve | Mass (g) | Dimensions (mm) |      |         |       |
|-------------|-------------|----------------|----------|-----------------|------|---------|-------|
|             |             |                |          | L               | øH   | Hp(WAF) | T     |
| SPC-10PM    | Rc 1/8      | With           | 2.0      | 23              | 11.4 | Hex.12  | R 1/8 |
| SPC-10PM-VL | Rc 1/8      | Without        | 1.5      | 23              | 11.4 | Hex.12  | R 1/8 |

**Socket SM type (Male thread)**

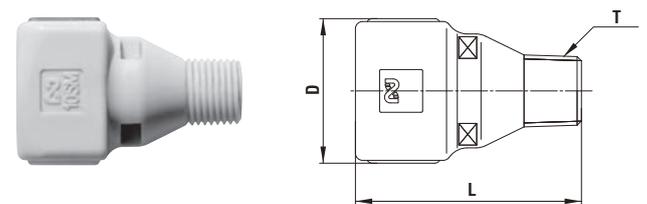


| Model       | Application | Built-in valve | Mass (g) | Dimensions (mm) |        |       |
|-------------|-------------|----------------|----------|-----------------|--------|-------|
|             |             |                |          | L               | D      | T     |
| SPC-10SM    | Rc 1/8      | With           | 6.8      | 31.5            | (20.3) | R 1/8 |
| SPC-10SM-VL | Rc 1/8      | Without        | 6.4      | 31.5            | (20.3) | R 1/8 |

**Plug PHB type (For panel mount)**

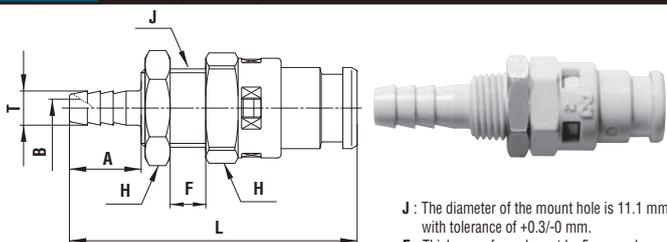

| Model        | Application | Built-in valve | Mass (g) | Dimensions (mm) |    |        |     |     |
|--------------|-------------|----------------|----------|-----------------|----|--------|-----|-----|
|              |             |                |          | L               | A  | H(WAF) | øT  | øB  |
| SPC-04PHB    | 4 mm ID     | With           | 5.9      | (40)            | 10 | Hex.14 | 4.8 | 2.5 |
| SPC-04PHB-VL | 4 mm ID     | Without        | 5.4      | (40)            | 10 | Hex.14 | 4.8 | 2.5 |
| SPC-06PHB    | 6 mm ID     | With           | 6.2      | (45)            | 15 | Hex.14 | 7   | 3.6 |
| SPC-06PHB-VL | 6 mm ID     | Without        | 5.7      | (45)            | 15 | Hex.14 | 7   | 3.6 |

Application Example

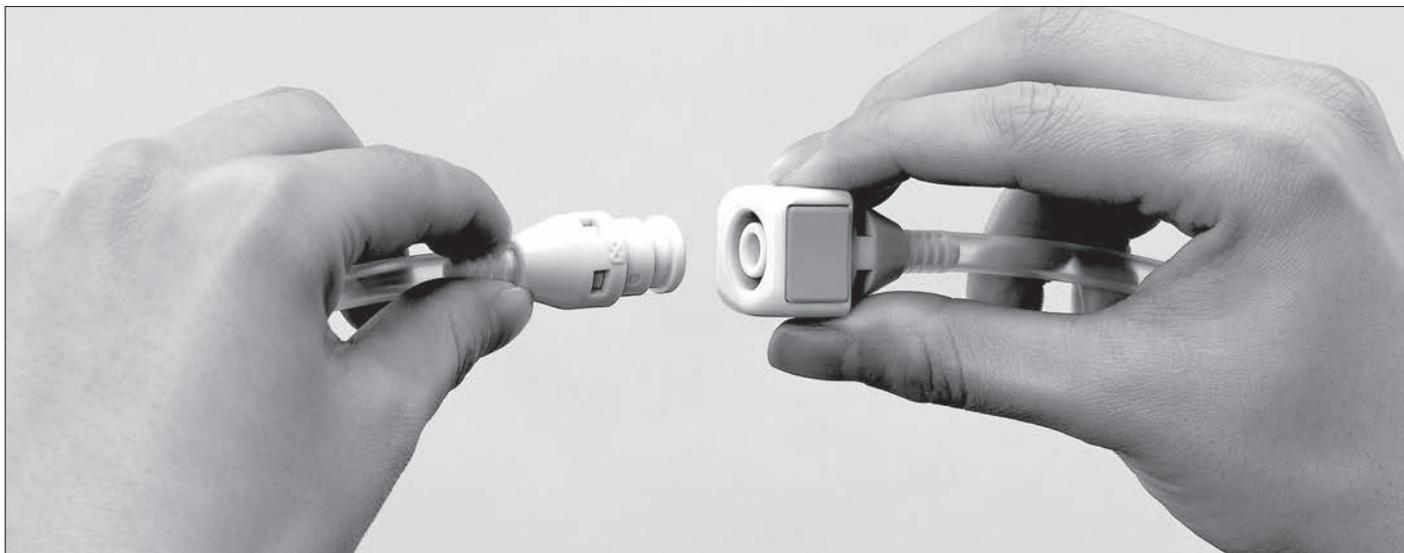

For Low Pressure (Air)


# Super Cupla

Light, compact for air piping connections

|  |   |  |
|--|---|--|
| Working pressure   | Valve structure   | Applicable fluids  |
| <br>1.0 MPa<br>(10 kgf/cm <sup>2</sup> ) | <br>One-way shut-off | <br>Air |

## The lightweight design makes the Cupla best suited to power tools! Push-to-connect for easy operation.

- Lightweight design suits direct connection to power tools. Aluminum body is adopted for some models to reduce the weight.
- Just push the plug into socket for easy one hand connection.
- Available in various end configurations for a wide range of pneumatic applications.
- Model O2S20P can be connected with sockets for Hi Cupla Models 10, 17, 20, 30 and 40.
- Also available with quick connect / disconnect Tube Fitter type.

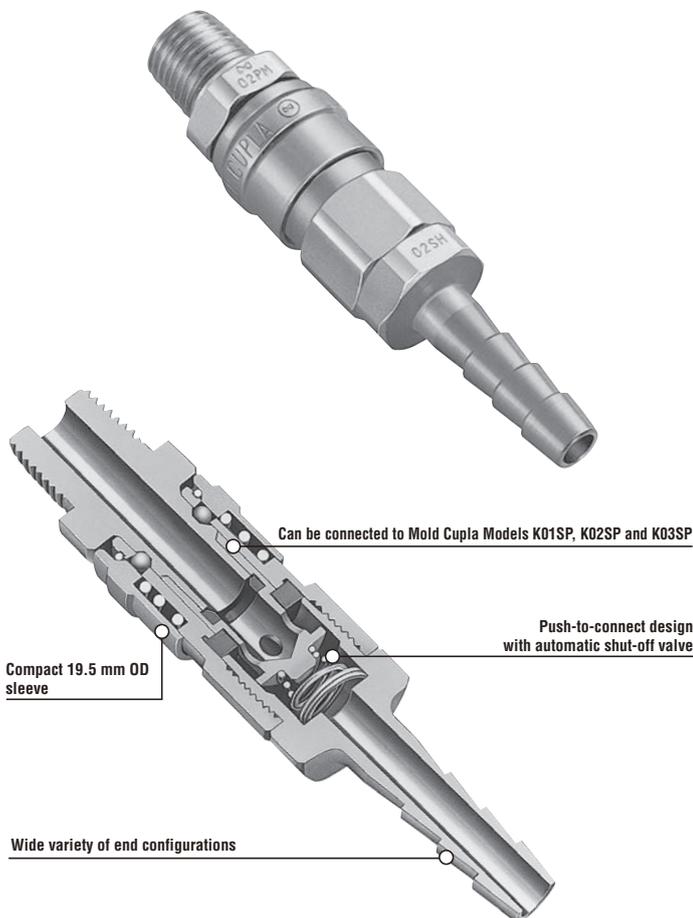

| Specifications   |  |  |          |                           |                |         |                   |
|------------------|--|--|----------|---------------------------|----------------|---------|-------------------|
| Body material    | Cupla : Steel (Chrome-plated), Aluminum<br>Tube Fitter Type: Brass (Nickel-plated) |  |          |                           |                |         |                   |
| Size             | Thread   | 1/8", 1/4"   |          |                           |                |         |                   |
|                  | Hose barb  | 1/4", Urethane hose : $\phi 5 \times \phi 8$ , $\phi 6.5 \times \phi 10$   |          |                           |                |         |                   |
|                  | Tube barb (Tube fitter)  | Polyurethane tube: Outside Dia. $\phi 6 \pm 0.1$ , $\phi 8 \pm 0.15$<br>Polyamide tube: Outside Dia. $\phi 6^{+0.05}_{-0.08}$ , $\phi 8^{+0.05}_{-0.1}$<br>Fluorine contained resin tube: Outside Dia. $\phi 6 \pm 0.07$ , $\phi 8 \pm 0.07$ |          |                           |                |         |                   |
| Working pressure | MPa  | 1.0  |          |                           |                |         |                   |
|                  | kgf/cm <sup>2</sup>  | 10   |          |                           |                |         |                   |
|                  | bar  | 10   |          |                           |                |         |                   |
|                  | PSI  | 145  |          |                           |                |         |                   |
| Seal material    | Nitrile rubber   | Mark   | NBR (SG) | Working temperature range | -20°C to +80°C | Remarks | Standard material |

• Above specifications apply only to Cuplas. Working pressure, pressure resistance and working temperature range may vary depending on tube materials you use with and its working temperature range. Micro Cupla with Tube Fitter has NBR packing material only.

| Max. Tightening Torque |        | Nm {kgf·cm} |
|------------------------|--------|-------------|
| Size (Thread)          | 1/8"   | 1/4"        |
| Torque                 | 7 {71} | 14 {143}    |

### Flow Direction

Air flows in either direction from plug or socket side when coupled.



### Interchangeability

Any socket and plug can be connected regardless of their sizes and end configurations.  
\*Can be connected with Mold Cuplas.  
\*When conversion socket+plug Model O2S20P is used, Super Cupla plugs can be connected with sockets for Hi Cupla Models 20, 30 and 40.


| Min. Cross-Sectional Area (mm <sup>2</sup> ) |      |      |                                   |                                   |
|--|------|------|-----------------------------------|-----------------------------------|
| Model  | O1SP | O2SP | Tube Fitter Type for 6 mm OD tube | Tube Fitter Type for 8 mm OD tube |
| Min. cross-sectional area                    | 19   | 19   | 12.5                              | 19                                |

### Suitability for Vacuum

Not suitable for vacuum application in either connected or disconnected condition.


### Pressure - Flow Characteristics

[Test conditions] • Fluid : Air • Temperature : Room temperature  
• Tube size :  $\phi 6 \text{ mm} \times \phi 4 \text{ mm}$ ,  $\phi 8 \text{ mm} \times \phi 6 \text{ mm}$  (Super Cupla with Tube Fitter)

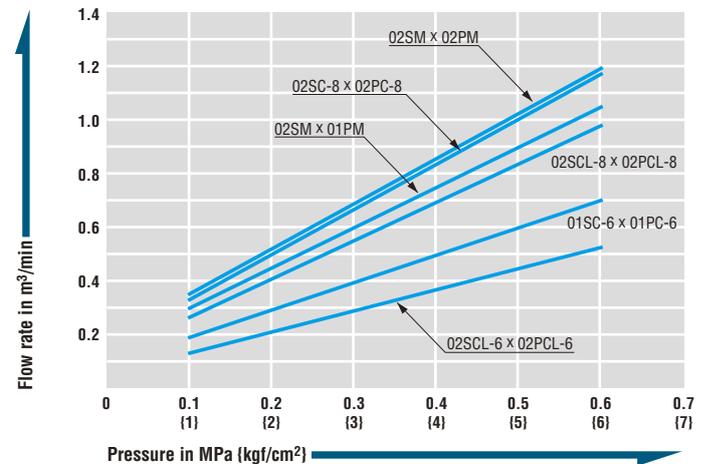


Models and Dimensions

**Plug O2PH type (Hose barb)**

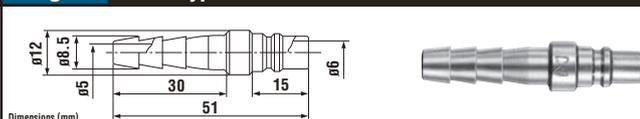


| Model | Application (Hose) | Mass (g) |
|-------|--------------------|----------|
| O2PH  | 1/4"               | 16       |

**Plug PN type (For connection to urethane hose)**

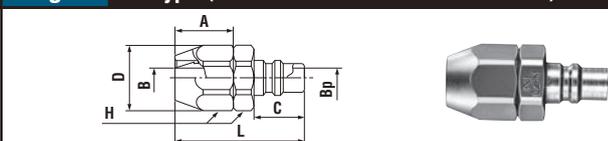


| Model | Application (Hose) | Mass (g) | Dimensions (mm) |    |      |    |        |     |     |
|-------|--------------------|----------|-----------------|----|------|----|--------|-----|-----|
|       |                    |          | L               | C  | øD   | A  | H(WAF) | øBp | øB  |
| O1PN  | ø5 mm x ø8 mm      | 27.6     | (38.5)          | 15 | 18.5 | 17 | Hex.17 | 6   | 3.8 |
| O2PN  | ø6.5 mm x ø10 mm   | 27.6     | (38.5)          | 15 | 18.5 | 17 | Hex.17 | 6   | 5.3 |

**Plug PM type (Male thread)**

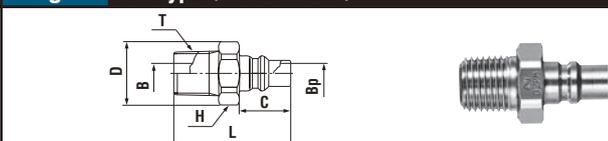


| Model | Application | Mass (g) | Dimensions (mm) |    |      |        |       |     |    |
|-------|-------------|----------|-----------------|----|------|--------|-------|-----|----|
|       |             |          | L               | C  | øD   | H(WAF) | T     | øBp | øB |
| O1PM  | Rc 1/8      | 12       | 31              | 15 | -    | Hex.12 | R 1/8 | 6   | 5  |
| O2PM  | Rc 1/4      | 22.7     | 34              | 15 | 18.5 | Hex.17 | R 1/4 | 6   | 6  |

**Plug O2PFF type (Parallel female thread)**

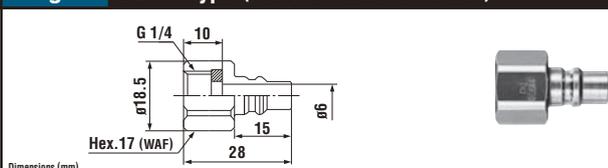


| Model | Application | Mass (g) |
|-------|-------------|----------|
| O2PFF | G 1/4       | 17.7     |

**Plug/Socket Model O2S2OP (Conversion model to connect Hi Cupla socket)**

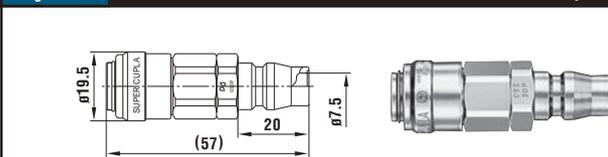


| Model  | Application       | Mass (g) |
|--------|-------------------|----------|
| O2S2OP | Hi Cupla (Socket) | 58       |

**Plug PC type (With Tube Fitter)**

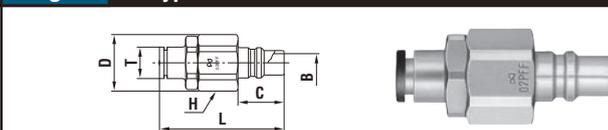


| Model  | Application (Tube) | Mass (g) | Dimensions (mm) |    |      |      |        |      |    |
|--------|--------------------|----------|-----------------|----|------|------|--------|------|----|
|        |                    |          | L               | C  | øD   | E    | H(WAF) | øT   | øB |
| O2PC-6 | 6 mm OD            | 28.5     | (40.5)          | 15 | 18.5 | 18.5 | Hex.17 | 10.3 | 6  |
| O2PC-8 | 8 mm OD            | 33       | (47.5)          | 15 | 18.5 | 18.5 | Hex.17 | 13.5 | 6  |

**Plug PCL type (With L-shaped Tube Fitter)**

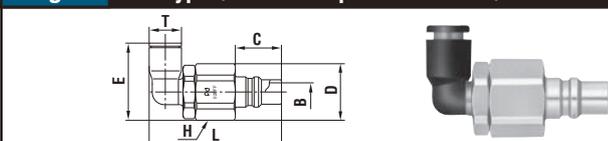


| Model   | Application (Tube) | Mass (g) | Dimensions (mm) |    |      |        |        |      |    |
|---------|--------------------|----------|-----------------|----|------|--------|--------|------|----|
|         |                    |          | L               | C  | øD   | E      | H(WAF) | øT   | øB |
| O2PCL-6 | 6 mm OD            | 29.5     | (43)            | 15 | 18.5 | (25.3) | Hex.17 | 10.5 | 6  |
| O2PCL-8 | 8 mm OD            | 34.5     | (46.5)          | 15 | 18.5 | (32.3) | Hex.17 | 13.5 | 6  |

**Socket O2SH type (Hose barb)**

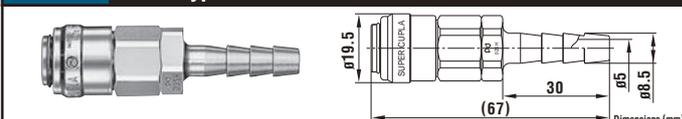


| Model | Application (Hose) | Mass (g) |
|-------|--------------------|----------|
| O2SH  | 1/4"               | 56       |

**Socket SN type (For connection to urethane hose)**

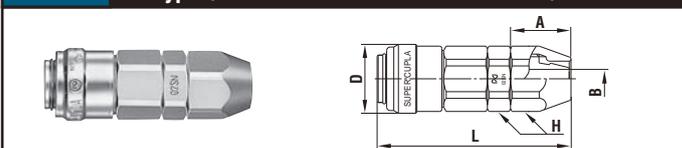


| Model | Application (Hose) | Mass (g) | Dimensions (mm) |    |      |        |     |
|-------|--------------------|----------|-----------------|----|------|--------|-----|
|       |                    |          | L               | A  | øD   | H(WAF) | øB  |
| O1SN  | ø5 mm x ø8 mm      | 35       | (54.5)          | 17 | 19.5 | Hex.17 | 3.8 |
| O2SN  | ø6.5 mm x ø10 mm   | 35       | (54.5)          | 17 | 19.5 | Hex.17 | 5.3 |

**Socket SM type (Male thread)**

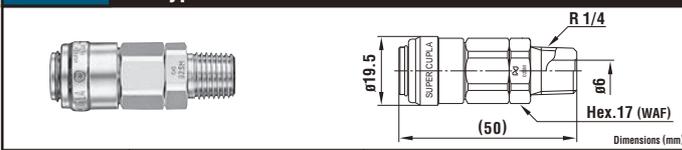


| Model | Application | Mass (g) |
|-------|-------------|----------|
| O2SM  | Rc 1/4      | 57       |

**Socket O2SF type (Female thread)**

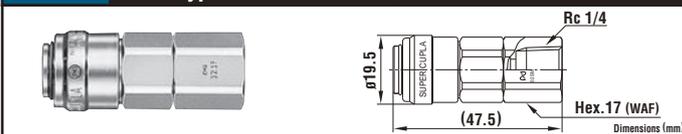

| Model | Application | Mass (g) |
|-------|-------------|----------|
| O2SF  | R 1/4       | 26       |

**Socket O2SMF type (Parallel male thread)**

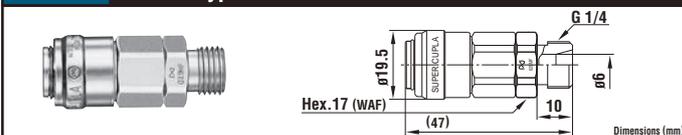


| Model | Application | Mass (g) |
|-------|-------------|----------|
| O2SMF | G 1/4       | 27       |

**Socket SC type (With Tube Fitter)**



| Model  | Application (Tube) | Mass (g) | Dimensions (mm) |      |      |
|--------|--------------------|----------|-----------------|------|------|
|        |                    |          | L               | øD   | øT   |
| O2SC-6 | 6 mm OD            | 46       | (65.5)          | 19.5 | 10.5 |
| O2SC-8 | 8 mm OD            | 50.5     | (70)            | 19.5 | 13.5 |

**Socket SCL type (With L-shaped Tube Fitter)**

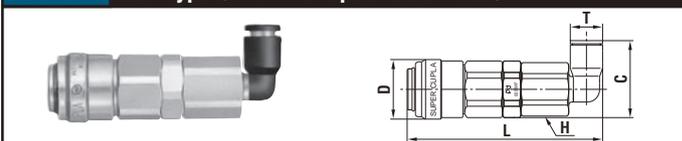

| Model   | Application (Tube) | Mass (g) | Dimensions (mm) |      |        |        |      |
|---------|--------------------|----------|-----------------|------|--------|--------|------|
|         |                    |          | L               | øD   | H(WAF) | C      | øT   |
| O2SCL-6 | 6 mm OD            | 47.5     | (63.5)          | 19.5 | Hex.16 | (25.7) | 10.3 |
| O2SCL-8 | 8 mm OD            | 49.5     | (67.7)          | 19.5 | Hex.16 | (32.8) | 13.5 |

**Socket SCB type (With Tube Fitter for panel mounting)**



| Model   | Application (Tube) | Mass (g) | Dimensions (mm) |    |         |        |           |                      |
|---------|--------------------|----------|-----------------|----|---------|--------|-----------|----------------------|
|         |                    |          | L               | øD | Hs(WAF) | H(WAF) | T         | øJ                   |
| O2SCB-6 | 6 mm OD            | 45.5     | (71.5)          | 18 | Hex.17  | Hex.15 | 7 or less | 12.5 <sup>+0.3</sup> |
| O2SCB-8 | 8 mm OD            | 46.5     | (72)            | 21 | Hex.17  | Hex.18 | 8 or less | 15.5 <sup>+0.3</sup> |

\* T and øJ are dimensions of panel.

Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.

For Low Pressure


# Hi Cupla

Universal purpose couplings for air lines

|                                      |                                      |                  |   |
|--------------------------------------|--------------------------------------|------------------|---|
| Working pressure                     | Working pressure                     | Valve structure  | Applicable fluids (Steel applies to air only) |
|                                      |                                      |                  |   |
| 1.5 MPa<br>(15 kgf/cm <sup>2</sup> ) | 1.0 MPa<br>(10 kgf/cm <sup>2</sup> ) | One-way shut-off | Air<br>Water                                  |

From factory air line to pneumatic tool connection, available in various body materials, sizes and end configurations. Excellent durability.

- An excellent general purpose coupling for connecting factory air supply to pneumatic tools.
- Steel coupling is suitable for air. Brass or stainless steel is suitable for water. Note that fluid will come out from the plug when disconnected.
- Critical structural parts of steel models are heat-treated for increased strength giving greater durability and resistance to wear.
- Available in various body materials, sizes and end configurations applicable to a wide range of applications.

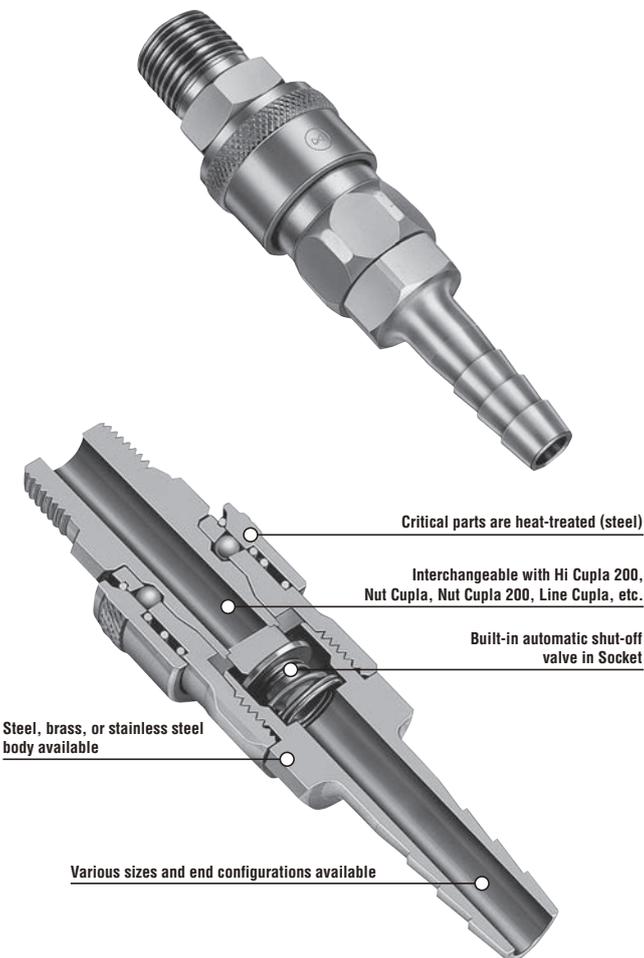

| Specifications            |                       |                 |                           |         |
|---------------------------|-----------------------|-----------------|---------------------------|---------|
| Body material             | Steel (Chrome-plated) | Brass           | Stainless steel           |         |
| Size                      | Thread                | 1/8" to 1"      |                           |         |
|                           | Hose barb             | 1/4" to 1" hose |                           |         |
| Working pressure          | MPa                   | 1.5             | 1.0                       | 1.5     |
|                           | kgf/cm <sup>2</sup>   | 15              | 10                        | 15      |
|                           | bar                   | 15              | 10                        | 15      |
|                           | PSI                   | 218             | 145                       | 218     |
| Seal material             | Nitrile rubber        | FKM (X-100)     | Working temperature range | Remarks |
| Working temperature range | -20°C to +80°C        | -20°C to +180°C | Standard material         |         |

| Max. Tightening Torque |                 | Nm (kgf·cm) |          |          |          |            |            |
|------------------------|-----------------|-------------|----------|----------|----------|------------|------------|
| Size (Thread)          |                 | 1/8"        | 1/4"     | 3/8"     | 1/2"     | 3/4"       | 1"         |
| Torque                 | Steel           | 7 (71)      | 14 (143) | 22 (224) | 60 (612) | 100 (1020) | 120 (1224) |
|                        | Brass           | 5 (51)      | 9 (92)   | 11 (112) | 30 (306) | 50 (510)   | 65 (663)   |
|                        | Stainless steel | —           | 14 (143) | 22 (224) | 60 (612) | 100 (1020) | 120 (1224) |


**Flow Direction**

Fluid must run from socket to plug.

- Interchangeability**
1. Sockets and plugs for Models 10, 17, 20, 30, and 40 can be connected with each other regardless of end configurations.
  2. Sockets and plugs for Models 400, 600, and 800 can be connected with each other regardless of end configurations. 1 and 2 can not be connected across each group.
  3. Interchangeable with all other Hi Cupla Series products. Please see the page for "Hi Cupla Series Interchangeability."


| Min. Cross-Sectional Area |      | (mm <sup>2</sup> ) |       |       |       |       |       |       |       |       |      |      |
|---------------------------|------|--------------------|-------|-------|-------|-------|-------|-------|-------|-------|------|------|
| ■ 10, 17, 20, 30, 40 type |      |                    |       |       |       |       |       |       |       |       |      |      |
| Socket                    | Plug | 17PH               | 20PH  | 30PH  | 40PH  | 10PM  | 20PM  | 30PM  | 40PM  | 20PF  | 30PF | 40PF |
| 10SM                      |      | 13                 | 13    | 13    | 13    | 13    | 13    | 13    | 13    | 13    | 13   | 13   |
| 17SH                      |      | 16                 | 16    | 16    | 16    | 13    | 16    | 16    | 16    | 16    | 16   | 16   |
| 20SH                      |      | 16                 | 20    | 20    | 20    | 13    | 20    | 20    | 20    | 20    | 20   | 20   |
| 20SM, SF                  |      | 16                 | 20    | 33    | 33    | 13    | 33    | 33    | 33    | 33    | 33   | 33   |
| 30SH                      |      | 16                 | 20    | 33    | 33    | 13    | 33    | 33    | 33    | 33    | 33   | 33   |
| 30SM, SF                  |      | 16                 | 20    | 33    | 33    | 13    | 33    | 33    | 33    | 33    | 33   | 33   |
| 40SH                      |      | 16                 | 20    | 33    | 33    | 13    | 33    | 33    | 33    | 33    | 33   | 33   |
| 40SM, SF                  |      | 16                 | 20    | 33    | 33    | 13    | 33    | 33    | 33    | 33    | 33   | 33   |
| ■ 400, 600, 800 type      |      |                    |       |       |       |       |       |       |       |       |      |      |
| Socket                    | Plug | 400PH              | 600PH | 800PH | 400PM | 600PM | 800PM | 400PF | 600PF | 800PF |      |      |
| 400SH                     |      | 64                 | 64    | 64    | 64    | 64    | 64    | 64    | 64    | 64    | 64   | 64   |
| 400SM, SF                 |      | 64                 | 94    | 94    | 94    | 94    | 94    | 94    | 94    | 94    | 94   | 94   |
| 600SH                     |      | 64                 | 94    | 94    | 94    | 94    | 94    | 94    | 94    | 94    | 94   | 94   |
| 600SM, SF                 |      | 64                 | 94    | 94    | 94    | 94    | 94    | 94    | 94    | 94    | 94   | 94   |
| 800SH                     |      | 64                 | 94    | 94    | 94    | 94    | 94    | 94    | 94    | 94    | 94   | 94   |
| 800SM, SF                 |      | 64                 | 94    | 94    | 94    | 94    | 94    | 94    | 94    | 94    | 94   | 94   |

**Suitability for Vacuum**  
Not suitable for vacuum application in either connected or disconnected condition.

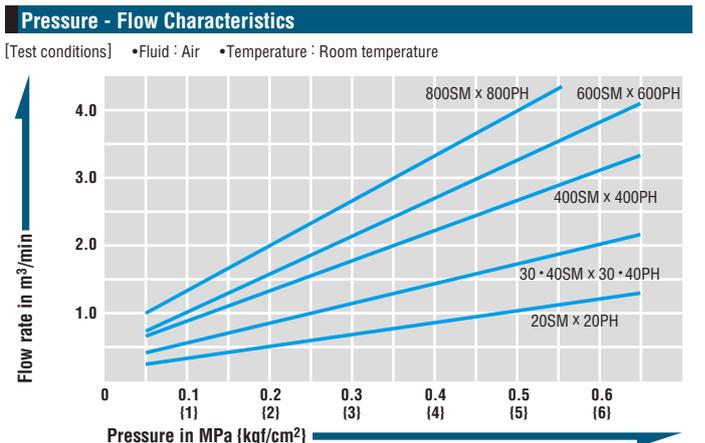


Models and Dimensions

**Plug PH type (Hose barb)**

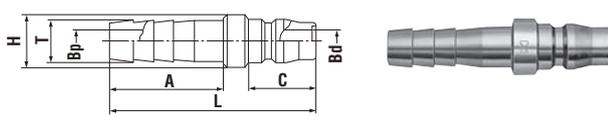


| Model | Application (Hose) | Body material • Mass (g) |       |                 | Dimensions (mm) |    |    |    |      |     |     |
|-------|--------------------|--------------------------|-------|-----------------|-----------------|----|----|----|------|-----|-----|
|       |                    | Steel                    | Brass | Stainless steel | L               | øH | A  | C  | øT   | øBp | øBd |
| 17PH  | 1/4"               | 24                       | -     | -               | 54              | 16 | 27 | 20 | 7.2  | 4.5 | 7.5 |
| 20PH  | 1/4"               | 28                       | 31    | 27              | 57              | 16 | 30 | 20 | 9    | 5   | 7.5 |
| 30PH  | 3/8"               | 32                       | 34    | 33              | 61              | 16 | 34 | 20 | 11.3 | 7.5 | 7.5 |
| 40PH  | 1/2"               | 59                       | 64    | 60              | 63              | 20 | 36 | 20 | 15   | 9   | 7.5 |
| 400PH | 1/2"               | 65                       | 71    | 66              | 66              | 22 | 36 | 23 | 15   | 9   | 13  |
| 600PH | 3/4"               | 123                      | 130   | 124             | 77              | 30 | 45 | 23 | 21   | 13  | 13  |
| 800PH | 1"                 | 151                      | 161   | 151             | 85              | 34 | 54 | 23 | 27   | 20  | 13  |

**Socket SH type (Hose barb)**

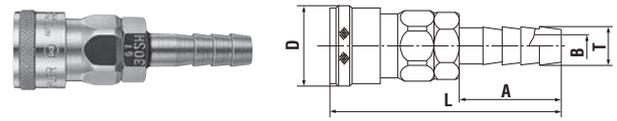


| Model | Application (Hose) | Body material • Mass (g) |       |                 | Dimensions (mm) |                      |    |      |     |
|-------|--------------------|--------------------------|-------|-----------------|-----------------|----------------------|----|------|-----|
|       |                    | Steel                    | Brass | Stainless steel | L               | øD                   | A  | øT   | øB  |
| 17SH  | 1/4"               | 99                       | -     | -               | (69.5)          | (26.5)               | 27 | 7.2  | 4.5 |
| 20SH  | 1/4"               | 99                       | 105   | 97              | (72.5)          | (26.5) <sup>+1</sup> | 30 | 9    | 5   |
| 30SH  | 3/8"               | 102                      | 107   | 100             | (76.5)          | (26.5) <sup>+1</sup> | 34 | 11.3 | 7.5 |
| 40SH  | 1/2"               | 115                      | 122   | 113             | (78.5)          | (26.5) <sup>+1</sup> | 36 | 15   | 9   |
| 400SH | 1/2"               | 220                      | 235   | 230             | (83)            | 35                   | 36 | 15   | 9   |
| 600SH | 3/4"               | 243                      | 262   | 242             | (92)            | 35                   | 45 | 21   | 14  |
| 800SH | 1"                 | 327                      | 350   | 325             | (102)           | 35                   | 55 | 27   | 16  |

**Plug PM type (Male thread)**

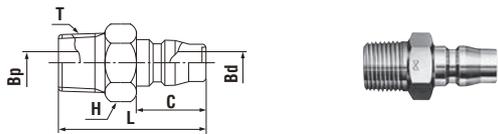


| Model | Application | Body material • Mass (g) |       |                 | Dimensions (mm) |                      |    |       |     |     |
|-------|-------------|--------------------------|-------|-----------------|-----------------|----------------------|----|-------|-----|-----|
|       |             | Steel                    | Brass | Stainless steel | L               | H(WAF)               | C  | T     | øBp | øBd |
| 10PM  | Rc 1/8      | 22                       | 24    | -               | 37              | Hex.14               | 20 | R 1/8 | 4   | 7.5 |
| 20PM  | Rc 1/4      | 25                       | 27    | 26              | 41              | Hex.14               | 20 | R 1/4 | 7.5 | 7.5 |
| 30PM  | Rc 3/8      | 40                       | 43    | 41              | 42              | Hex.19 <sup>-3</sup> | 20 | R 3/8 | 7.5 | 7.5 |
| 40PM  | Rc 1/2      | 60                       | 65    | 60              | 46              | Hex.22               | 20 | R 1/2 | 12  | 7.5 |
| 400PM | Rc 1/2      | 70                       | 73    | 69              | 50              | Hex.22               | 23 | R 1/2 | 13  | 13  |
| 600PM | Rc 3/4      | 113                      | 121   | 114             | 55              | Hex.32               | 23 | R 3/4 | 19  | 13  |
| 800PM | Rc 1        | 182                      | 196   | 183             | 63              | Hex.35               | 23 | R 1   | 22  | 13  |

**Socket SM type (Male thread)**

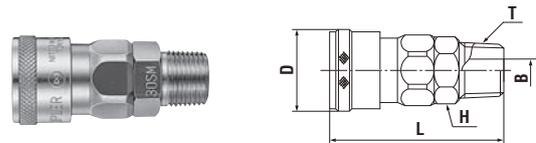


| Model | Application | Body material • Mass (g) |       |                 | Dimensions (mm) |                      |                      |       |                 |
|-------|-------------|--------------------------|-------|-----------------|-----------------|----------------------|----------------------|-------|-----------------|
|       |             | Steel                    | Brass | Stainless steel | L               | øD                   | H(WAF)               | T     | øB              |
| 10SM  | Rc 1/8      | 97                       | -     | -               | (52.5)          | (26.5)               | Hex.19               | R 1/8 | 5               |
| 20SM  | Rc 1/4      | 97                       | 103   | 96              | (55.5)          | (26.5) <sup>+1</sup> | Hex.19               | R 1/4 | 7               |
| 30SM  | Rc 3/8      | 104                      | 108   | 100             | (56.5)          | (26.5) <sup>+1</sup> | Hex.19               | R 3/8 | 8 <sup>+4</sup> |
| 40SM  | Rc 1/2      | 127                      | 135   | 126             | (59.5)          | (26.5) <sup>+1</sup> | Hex.23 <sup>+2</sup> | R 1/2 | 9               |
| 400SM | Rc 1/2      | 210                      | 224   | 212             | (63)            | 35                   | Hex.29               | R 1/2 | 13              |
| 600SM | Rc 3/4      | 242                      | 259   | 243             | (67)            | 35                   | Hex.32               | R 3/4 | 16              |
| 800SM | Rc 1        | 329                      | 353   | 328             | (72)            | 35                   | Hex.36               | R 1   | 16              |

**Plug PF type (Female thread)**

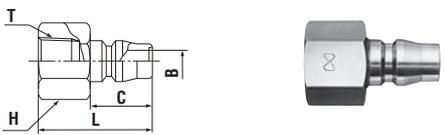


| Model | Application | Body material • Mass (g) |       |                 | Dimensions (mm) |        |    |        |     |
|-------|-------------|--------------------------|-------|-----------------|-----------------|--------|----|--------|-----|
|       |             | Steel                    | Brass | Stainless steel | L               | H(WAF) | C  | T      | øB  |
| 20PF  | R 1/4       | 28                       | 31    | 29              | 36              | Hex.17 | 20 | Rc 1/4 | 7.5 |
| 30PF  | R 3/8       | 35                       | 41    | 38              | 37              | Hex.21 | 20 | Rc 3/8 | 7.5 |
| 40PF  | R 1/2       | 69                       | 76    | 70              | 38              | Hex.29 | 20 | Rc 1/2 | 7.5 |
| 400PF | R 1/2       | 82                       | 86    | 81              | 41              | Hex.29 | 23 | Rc 1/2 | 13  |
| 600PF | R 3/4       | 115                      | 124   | 115             | 45              | Hex.35 | 23 | Rc 3/4 | 13  |
| 800PF | R 1         | 189                      | 207   | 190             | 54              | Hex.41 | 23 | Rc 1   | 13  |

**Socket SF type (Female thread)**

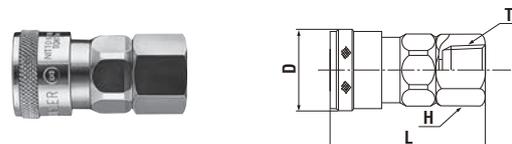

| Model | Application | Body material • Mass (g) |       |                 | Dimensions (mm) |                      |        |        |
|-------|-------------|--------------------------|-------|-----------------|-----------------|----------------------|--------|--------|
|       |             | Steel                    | Brass | Stainless steel | L               | øD                   | H(WAF) | T      |
| 20SF  | R 1/4       | 97                       | 101   | 94              | (49.5)          | (26.5) <sup>+1</sup> | Hex.19 | Rc 1/4 |
| 30SF  | R 3/8       | 98                       | 103   | 95              | (50.5)          | (26.5) <sup>+1</sup> | Hex.21 | Rc 3/8 |
| 40SF  | R 1/2       | 136                      | 146   | 136             | (52.5)          | (26.5) <sup>+1</sup> | Hex.29 | Rc 1/2 |
| 400SF | R 1/2       | 216                      | 233   | 215             | (57)            | 35                   | Hex.29 | Rc 1/2 |
| 600SF | R 3/4       | 259                      | 277   | 257             | (61)            | 35                   | Hex.35 | Rc 3/4 |
| 800SF | R 1         | 327                      | 361   | 327             | (68)            | 35                   | Hex.41 | Rc 1   |

**Plug PFF type (Parallel female thread)**

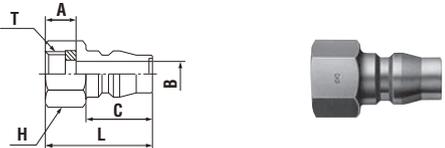

| Model | Application | Body material • Mass (g) |       |                 | Dimensions (mm) |        |   |    |       |     |
|-------|-------------|--------------------------|-------|-----------------|-----------------|--------|---|----|-------|-----|
|       |             | Steel                    | Brass | Stainless steel | L               | H(WAF) | A | C  | T     | øB  |
| 20PFF | G 1/4       | 23                       | -     | -               | 32              | Hex.17 | 9 | 20 | G 1/4 | 7.5 |

• Above pictures are plugs and sockets of steel 20, 30 and 40 models.


\*1 : D = 25.4 for brass and stainless steel models.

\*2 : H = Hex. 22 for brass and stainless steel models.

\*3 : H = Hex. 17 for brass and stainless steel models.

\*4 : B = 9 for brass and stainless steel models.

Application Example

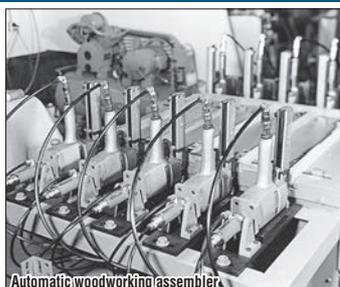

For Low Pressure

# Hi Cupla BL

Universal purpose couplings with sleeve lock mechanism for air lines

Working pressure



Valve structure



Applicable fluids (Steel applies to air only)



## Sleeve-lock mechanism is engaged by rotating the sleeve after connection.

- Sleeve-lock mechanism prevents accidental disconnection.
- An excellent general purpose coupling for connecting factory air supply to pneumatic tools.
- Steel coupling is suitable for air. Stainless steel is suitable for water. Note that fluid will come out from the plug when disconnected.
- Critical structural parts made of steel are heat-treated for increased strength giving greater durability and resistance to wear.
- Various body materials, sizes, and end configurations are available.
- SN-BL type for connection to urethane hose requires no hose clamp.



| Specifications           |                      |                        |                 |                           |                |         |                   |
|--------------------------|----------------------|------------------------|-----------------|---------------------------|----------------|---------|-------------------|
| Body material            |                      | Steel (Chrome-plated)  | Stainless steel |                           |                |         |                   |
| Size                     | Thread and hose barb | 1/4", 3/8", 1/2"       |                 |                           |                |         |                   |
|                          | SN Type              | For ø6.5 x ø10 mm hose | -               |                           |                |         |                   |
|                          |                      | For ø8 x ø12 mm hose   |                 |                           |                |         |                   |
| For ø8.5 x ø12.5 mm hose |                      |                        |                 |                           |                |         |                   |
| Working pressure         | MPa                  | 1.5                    |                 |                           |                |         |                   |
|                          | kgf/cm <sup>2</sup>  | 15                     |                 |                           |                |         |                   |
|                          | bar                  | 15                     |                 |                           |                |         |                   |
|                          | PSI                  | 218                    |                 |                           |                |         |                   |
| Seal material            | Nitrile rubber       | Mark                   | NBR (SG)        | Working temperature range | -20°C to +80°C | Remarks | Standard material |

Note: Working temperature range of SN-BL type is -20°C - +60°C.

| Max. Tightening Torque |                 |          | Nm (kgf·cm) |          |
|------------------------|-----------------|----------|-------------|----------|
| Size (Thread)          | 1/4"            | 3/8"     | 1/2"        |          |
| Torque                 | Steel           | 14 {143} | 22 {224}    | 60 {612} |
|                        | Stainless steel | 14 {143} | 22 {224}    | 60 {612} |


| Tightening Torque Range |  | Nm (kgf·cm) |  |
|-------------------------|--|-------------|--|
| SN Type                 |  |             |  |
| 9 to 11 {92 to 112}     |  |             |  |



- Interchangeability**
- 1 Sockets and plugs for Models 10, 17, 20, 30, and 40 can be connected with each other regardless of end configurations.
  - 2 Interchangeable with all other Hi Cupla Series products. Please see the page for "Hi Cupla Series Interchangeability."


| Min. Cross-Sectional Area |      | (mm <sup>2</sup> ) |      |      |      |      |      |      |      |      |      |      |
|---------------------------|------|--------------------|------|------|------|------|------|------|------|------|------|------|
| Socket                    | Plug | 17PH               | 20PH | 30PH | 40PH | 10PM | 20PM | 30PM | 40PM | 20PF | 30PF | 40PF |
| 20SH-BL                   |      | 16                 | 20   | 20   | 20   | 13   | 20   | 20   | 20   | 20   | 20   | 20   |
| 20SM-BL                   |      | 16                 | 20   | 33   | 33   | 13   | 33   | 33   | 33   | 33   | 33   | 33   |
| 20SF-BL                   |      | 16                 | 20   | 33   | 33   | 13   | 33   | 33   | 33   | 33   | 33   | 33   |
| 30SH-BL                   |      | 16                 | 20   | 33   | 33   | 13   | 33   | 33   | 33   | 33   | 33   | 33   |
| 30SM-BL                   |      | 16                 | 20   | 33   | 33   | 13   | 33   | 33   | 33   | 33   | 33   | 33   |
| 30SF-BL                   |      | 16                 | 20   | 33   | 33   | 13   | 33   | 33   | 33   | 33   | 33   | 33   |
| 40SH-BL                   |      | 16                 | 20   | 33   | 33   | 13   | 33   | 33   | 33   | 33   | 33   | 33   |
| 40SM-BL                   |      | 16                 | 20   | 33   | 33   | 13   | 33   | 33   | 33   | 33   | 33   | 33   |
| 40SF-BL                   |      | 16                 | 20   | 33   | 33   | 13   | 33   | 33   | 33   | 33   | 33   | 33   |
| 65SN-BL                   |      | 16                 | 20   | 22   | 22   | 13   | 22   | 22   | 22   | 22   | 22   | 22   |
| 80SN-BL                   |      | 16                 | 20   | 33   | 33   | 13   | 33   | 33   | 33   | 33   | 33   | 33   |
| 85SN-BL                   |      | 16                 | 20   | 33   | 33   | 13   | 33   | 33   | 33   | 33   | 33   | 33   |

**Suitability for Vacuum**  
Not suitable for vacuum application in either connected or disconnected condition.

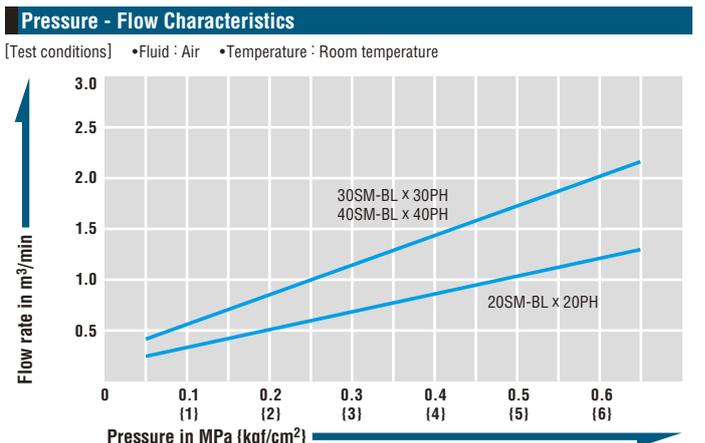


**Steel**

**Socket SH-BL type (Hose barb)**

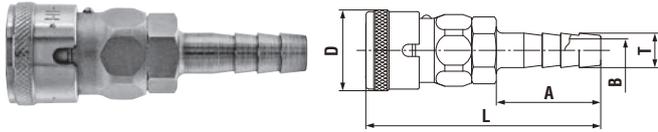


| Model   | Application (Hose) | Mass (g) | Dimensions (mm) |        |    |      |     |
|---------|--------------------|----------|-----------------|--------|----|------|-----|
|         |                    |          | L               | ∅D     | A  | ∅T   | ∅B  |
| 20SH-BL | 1/4"               | 103      | (72.5)          | (26.5) | 30 | 9    | 5   |
| 30SH-BL | 3/8"               | 106      | (76.5)          | (26.5) | 34 | 11.3 | 7.5 |
| 40SH-BL | 1/2"               | 118      | (78.5)          | (26.5) | 36 | 15   | 9   |

**Socket SM-BL type (Male thread)**

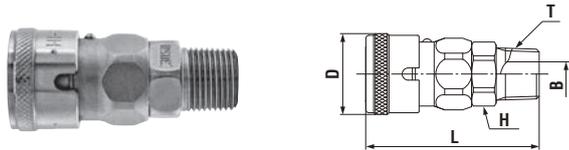


| Model   | Application | Mass (g) | Dimensions (mm) |        |        |       |    |
|---------|-------------|----------|-----------------|--------|--------|-------|----|
|         |             |          | L               | ∅D     | H(WAF) | T     | ∅B |
| 20SM-BL | Rc 1/4      | 101      | (55.5)          | (26.5) | Hex.19 | R 1/4 | 7  |
| 30SM-BL | Rc 3/8      | 108      | (56.5)          | (26.5) | Hex.19 | R 3/8 | 8  |
| 40SM-BL | Rc 1/2      | 131      | (59.5)          | (26.5) | Hex.23 | R 1/2 | 9  |

**Socket SF-BL type (Female thread)**

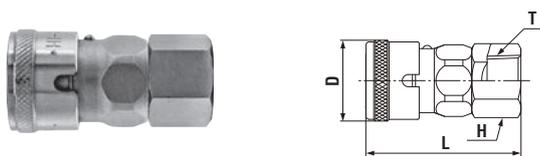

| Model   | Application | Mass (g) | Dimensions (mm) |        |        |        |
|---------|-------------|----------|-----------------|--------|--------|--------|
|         |             |          | L               | ∅D     | H(WAF) | T      |
| 20SF-BL | R 1/4       | 95       | (49.5)          | (26.5) | Hex.19 | Rc 1/4 |
| 30SF-BL | R 3/8       | 103      | (50.5)          | (26.5) | Hex.21 | Rc 3/8 |
| 40SF-BL | R 1/2       | 139      | (52.5)          | (26.5) | Hex.29 | Rc 1/2 |

**Socket SN-BL type (For urethane hose connection)**

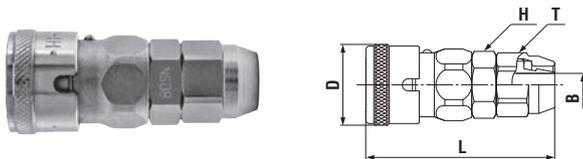


| Model   | Application (Hose) | Mass (g) | Dimensions (mm) |        |     |        |        |
|---------|--------------------|----------|-----------------|--------|-----|--------|--------|
|         |                    |          | L               | ∅D     | ∅B  | H(WAF) | T(WAF) |
| 65SN-BL | ∅6.5 x ∅10         | 115      | (59.5)          | (26.5) | 5.3 | Hex.19 | Hex.17 |
| 80SN-BL | ∅8 x ∅12           | 120      | (61.5)          | (26.5) | 7.5 | Hex.19 | Hex.19 |
| 85SN-BL | ∅8.5 x ∅12.5       | 120      | (61.5)          | (26.5) | 7.5 | Hex.19 | Hex.19 |

• Above pictures are sockets of 30 and 80 models.




**Stainless steel**

**Socket SH-BL type (Hose barb)**

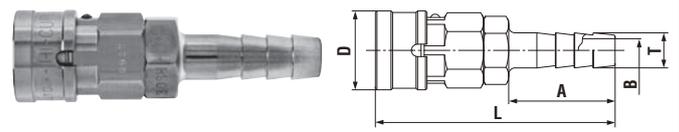


| Model   | Application (Hose) | Mass (g) | Dimensions (mm) |      |    |      |     |
|---------|--------------------|----------|-----------------|------|----|------|-----|
|         |                    |          | L               | ∅D   | A  | ∅T   | ∅B  |
| 20SH-BL | 1/4"               | 100      | (72.5)          | 25.4 | 30 | 9    | 5   |
| 30SH-BL | 3/8"               | 101      | (76.5)          | 25.4 | 34 | 11.3 | 7.5 |
| 40SH-BL | 1/2"               | 118      | (78.5)          | 25.4 | 36 | 15   | 9   |

**Socket SM-BL type (Male thread)**

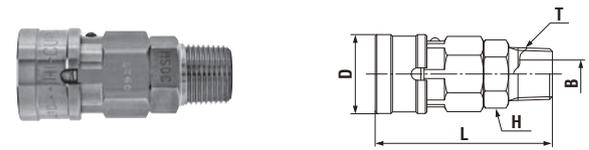

| Model   | Application | Mass (g) | Dimensions (mm) |      |        |       |    |
|---------|-------------|----------|-----------------|------|--------|-------|----|
|         |             |          | L               | ∅D   | H(WAF) | T     | ∅B |
| 20SM-BL | Rc 1/4      | 96       | (55.5)          | 25.4 | Hex.19 | R 1/4 | 7  |
| 30SM-BL | Rc 3/8      | 105      | (56.5)          | 25.4 | Hex.19 | R 3/8 | 8  |
| 40SM-BL | Rc 1/2      | 120      | (59.5)          | 25.4 | Hex.22 | R 1/2 | 9  |


**Socket SF-BL type (Female thread)**

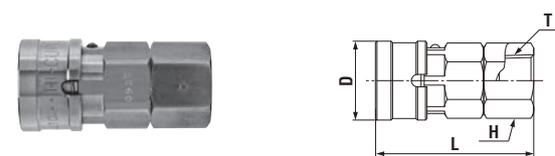

| Model   | Application | Mass (g) | Dimensions (mm) |      |        |        |
|---------|-------------|----------|-----------------|------|--------|--------|
|         |             |          | L               | ∅D   | H(WAF) | T      |
| 20SF-BL | R 1/4       | 98       | (49.5)          | 25.4 | Hex.19 | Rc 1/4 |
| 30SF-BL | R 3/8       | 99       | (50.5)          | 25.4 | Hex.21 | Rc 3/8 |
| 40SF-BL | R 1/2       | 138      | (52.5)          | 25.4 | Hex.29 | Rc 1/2 |

**Unlocked**

Align the cutout in the sleeve with the ball stopper, and pull the sleeve to connect the plug.

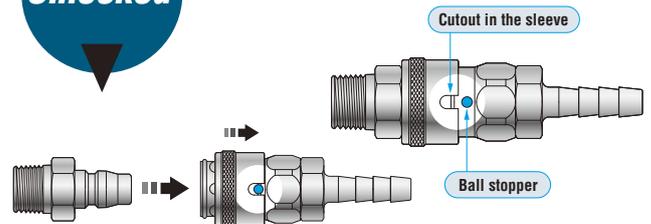


The stopper is marked with blue for visual understanding.

**Locking the sleeve**

Without alignment of the cutout with the ball stopper disconnection cannot be made.

**Accidental disconnection is prevented.**

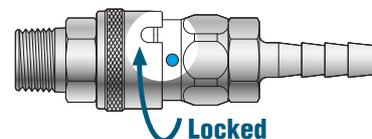

Align the cutout in the sleeve with the ball stopper, and pull the sleeve for disconnection.

For Low Pressure (Air)

# Hi Cupla 200

Push-to-connect type for air lines

Working pressure



Valve structure



Applicable fluid



**Simple and secure push-to-connect type! Big flow rate!**  
**End-face seal design.**  
**Gives excellent handling touch.**

- Just push the plug into the socket for simple and secure connection. This reduces connection time and improves efficiency.
- New valve design for low pressure loss to achieve flow rate increase (15% up over the conventional model).
- End-face seal is achieved when connected.
- Enhanced operability with low connection resistance.
- End-face seal design is superior to external seal with an O-ring due to no seal damage caused by exhausted lubrication.
- Available only with steel body. Not suitable for water or oil.
- Also available with quick connect/disconnect Tube Fitter type.



▼ With Tube Fitter

## Specifications

|                  |                         |   |          |                           |                |         |                   |
|------------------|-------------------------|---|----------|---------------------------|----------------|---------|-------------------|
| Body material    |                         | Steel (Chrome-plated)   |          |                           |                |         |                   |
| Size             | Thread and hose barb    | 1/4", 3/8", 1/2"  |          |                           |                |         |                   |
|                  | Tube barb (Tube fitter) | Polyurethane tube: Outside Dia. $\phi 6 \pm 0.1$ , $\phi 8 \pm 0.15$ , $\phi 10 \pm 0.15$<br>Polyamide tube: Outside Dia. $\phi 6^{+0.05}_{-0.08}$ , $\phi 8^{+0.05}_{-0.1}$ , $\phi 10^{+0.05}_{-0.1}$<br>Fluorine contained resin tube: Outside Dia. $\phi 6 \pm 0.07$ , $\phi 8 \pm 0.07$ , $\phi 10 \pm 0.07$ |          |                           |                |         |                   |
| Working pressure | MPa                     | 1.5   |          |                           |                |         |                   |
|                  | kgf/cm <sup>2</sup>     | 15  |          |                           |                |         |                   |
|                  | bar                     | 15  |          |                           |                |         |                   |
|                  | PSI                     | 218   |          |                           |                |         |                   |
| Seal material    | Nitrile rubber          | Mark  | NBR (SG) | Working temperature range | -20°C to +60°C | Remarks | Standard material |

• Above are specifications only for Cuplas. Working pressures, maximum pressures and working temperature ranges may vary depending on materials of the tube and its working temperature range.

## Max. Tightening Torque

Nm (kgf·cm)

|               |          |          |          |
|---------------|----------|----------|----------|
| Size (Thread) | 1/4"     | 3/8"     | 1/2"     |
| Torque        | 14 (143) | 22 (224) | 60 (612) |

## Flow Direction

Fluid must run from socket to plug.



## Interchangeability

Interchangeable with Hi Cupla Models 20, 30 and 40.  
 Interchangeable with each corresponding Hi Cupla Series models.

## Min. Cross-Sectional Area

(mm<sup>2</sup>)


| Socket   | Plug | 17PH | 20PH | 30PH | 40PH | 10PM | 20PM | 30PM | 40PM | 20PF | 30PF | 40PF |
|----------|------|------|------|------|------|------|------|------|------|------|------|------|
| 200-17SH |      | 16   | 16   | 16   | 16   | 13   | 16   | 16   | 16   | 16   | 16   | 16   |
| 200-20SH |      | 16   | 20   | 20   | 20   | 13   | 20   | 20   | 20   | 20   | 20   | 20   |
| 200-30SH |      | 16   | 20   | 41   | 41   | 13   | 41   | 41   | 41   | 41   | 41   | 41   |
| 200-40SH |      | 16   | 20   | 41   | 41   | 13   | 41   | 41   | 41   | 41   | 41   | 41   |
| 200-20SM |      | 16   | 20   | 41   | 41   | 13   | 41   | 41   | 41   | 41   | 41   | 41   |
| 200-30SM |      | 16   | 20   | 41   | 41   | 13   | 41   | 41   | 41   | 41   | 41   | 41   |
| 200-40SM |      | 16   | 20   | 41   | 41   | 13   | 41   | 41   | 41   | 41   | 41   | 41   |
| 200-20SF |      | 16   | 20   | 41   | 41   | 13   | 41   | 41   | 41   | 41   | 41   | 41   |
| 200-30SF |      | 16   | 20   | 41   | 41   | 13   | 41   | 41   | 41   | 41   | 41   | 41   |
| 200-40SF |      | 16   | 20   | 41   | 41   | 13   | 41   | 41   | 41   | 41   | 41   | 41   |

## Suitability for Vacuum

Not suitable for vacuum application in either connected or disconnected condition.


## Pressure - Flow Characteristics

[Test conditions] • Fluid : Air • Temperature : Room temperature

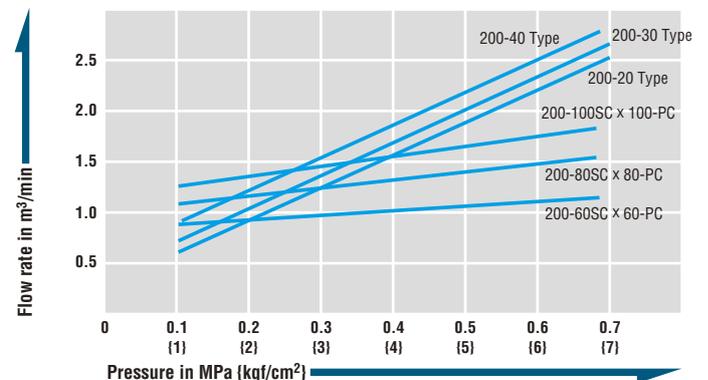


**Models and Dimensions** WAF : WAF stands for width across flats.

**Socket SH type (Hose barb)**

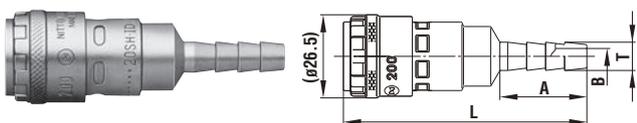


| Model    | Application (Hose) | Mass (g) | Dimensions (mm) |      |      |     |
|----------|--------------------|----------|-----------------|------|------|-----|
|          |                    |          | L               | A    | øT   | øB  |
| 200-17SH | 1/4"               | 86       | (77)            | 27   | 7.2  | 4.5 |
| 200-20SH | 1/4"               | 90       | (77)            | 27.5 | 9    | 5   |
| 200-30SH | 3/8"               | 92       | (79)            | 32   | 11.3 | 7.5 |
| 200-40SH | 1/2"               | 104      | (79.5)          | 32   | 15   | 10  |

**Socket SM type (Male thread)**

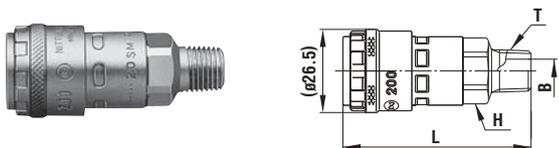

| Model    | Application | Mass (g) | Dimensions (mm) |        |       |     |
|----------|-------------|----------|-----------------|--------|-------|-----|
|          |             |          | L               | H(WAF) | T     | øB  |
| 200-20SM | Rc 1/4      | 89       | (60)            | Hex.19 | R 1/4 | 7.5 |
| 200-30SM | Rc 3/8      | 91       | (60.5)          | Hex.19 | R 3/8 | 10  |
| 200-40SM | Rc 1/2      | 102      | (56)            | Hex.24 | R 1/2 | 13  |


**Socket SF type (Female thread)**

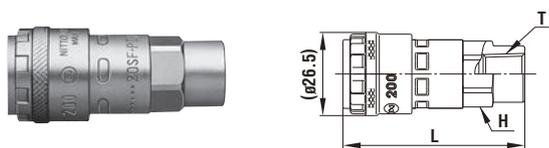

| Models   | Application | Mass (g) | Dimensions (mm) |        |        |
|----------|-------------|----------|-----------------|--------|--------|
|          |             |          | L               | H(WAF) | T      |
| 200-20SF | R 1/4       | 94       | (57.5)          | Hex.19 | Rc 1/4 |
| 200-30SF | R 3/8       | 103      | (55.5)          | Hex.22 | Rc 3/8 |
| 200-40SF | R 1/2       | 138      | (57.5)          | Hex.29 | Rc 1/2 |

**Models and Dimensions (With Tube Fitter)**


**Socket SC type (Tube Fitter)**

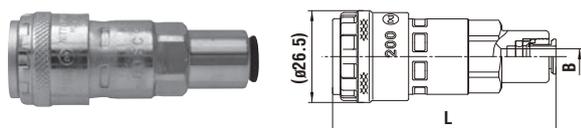

| Model     | Application       | Mass (g) | Dimensions (mm) |     |
|-----------|-------------------|----------|-----------------|-----|
|           |                   |          | L               | øB  |
| 200-60SC  | For 6 mm OD tube  | 100      | (64)            | 5   |
| 200-80SC  | For 8 mm OD tube  | 105      | (67.5)          | 6.5 |
| 200-100SC | For 10 mm OD tube | 123      | (70.5)          | 8.5 |



• The outer dimensions of Model 200-100SC are a little bit different from those of other models.

**Plug PC type (Tube Fitter)**

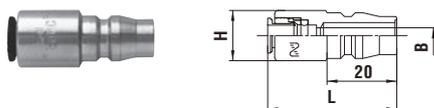

| Model | Application       | Mass (g) | Dimensions (mm) |      |     |
|-------|-------------------|----------|-----------------|------|-----|
|       |                   |          | L               | øH   | øB  |
| 60PC  | For 6 mm OD tube  | 25       | (37)            | 14.5 | 4.5 |
| 80PC  | For 8 mm OD tube  | 30       | (41)            | 16.5 | 6.5 |
| 100PC | For 10 mm OD tube | 43       | (45)            | 19.5 | 7.5 |

**Application example**

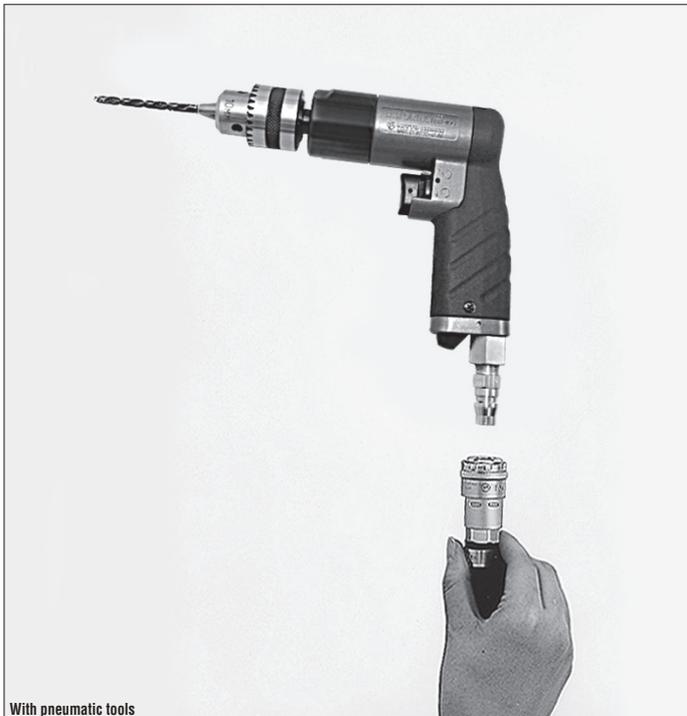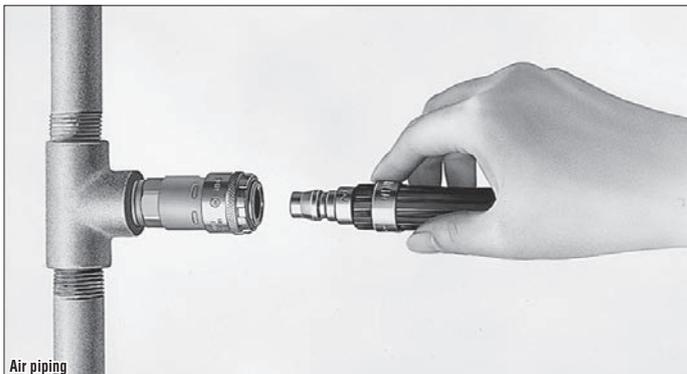

**All of socket, plug and tube can be connected in one push-to-connect operation.**

**Hi Cupla 200 and Tube Fitter are now integrated.**

*Major applications: miniature pneumatic equipment, automatic control equipment, physicochemical equipment and medical devices.*

**Just push in for quick connection.**

Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.

# For Low Pressure (Air)

## Hi Cupla for Connection to Braided Hoses Nut Cupla Nut Cupla 200 Rotary Nut Cupla

For connection to urethane hose

Working pressure



Valve structure



Applicable fluids (Steel applies to air only)




**No hose clamp required!**  
**Fitted with hose guard nut to prevent possible kinking.**  
**Hi Cupla for connection to braided hoses is now available.**

- Nut types are available in Hi Cupla Series and Hi Cupla 200 Series. Hose guard nut type available to prevent hose kinking.
- To mount on hose, simply slide it over the nipple and tighten the nut.
- The design to tighten outside of hose reduces hose slip away or fluid leaks.
- Also available are Rotary Nut Cupla equipped with ball bearing swivel mechanism to prevent and relieve tension on operator's hands.

Nut Cupla

Nut Cupla 200

Nut Cupla 200 with hose guard nut

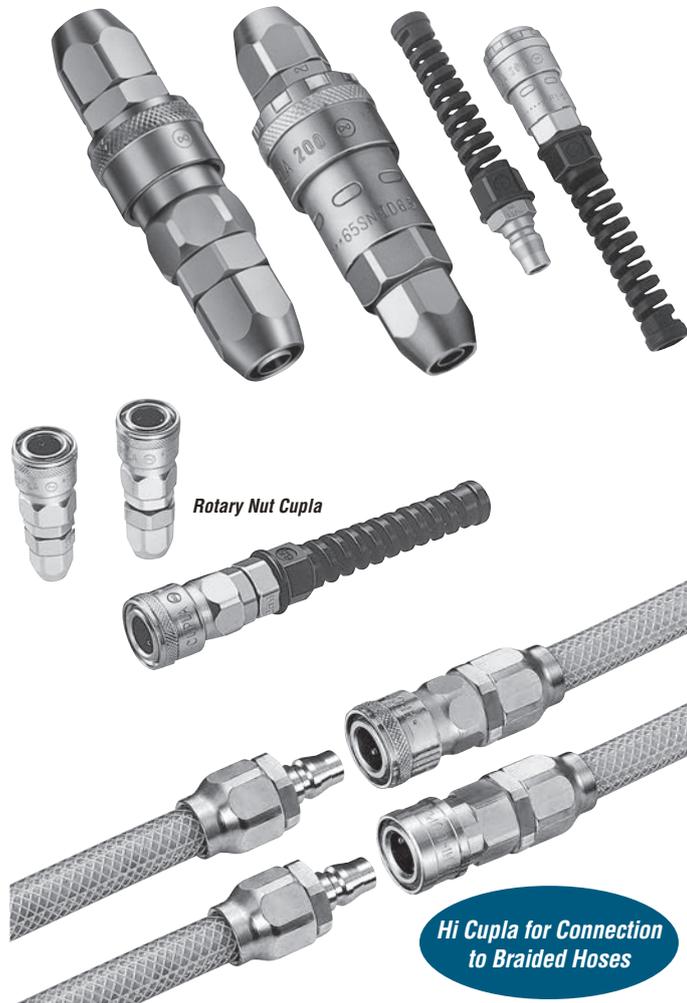

Rotary Nut Cupla

**Hi Cupla for Connection to Braided Hoses**

### Specifications (Nut Cupla / Nut Cupla 200 / Rotary Nut Cupla)

|                    |  |      |          |                           |                |         |                   |
|--------------------|--|------|----------|---------------------------|----------------|---------|-------------------|
| Body material      | Steel (Chrome-plated)  |      |          |                           |                |         |                   |
| Urethane hose size | For ø5 mm x ø8 mm, ø6 mm x ø9 mm hose<br>For ø6.5 mm x ø10 mm, ø8 mm x ø12 mm hose<br>For ø8.5 mm x ø12.5 mm, ø11 mm x ø16 mm hose |      |          |                           |                |         |                   |
| Working pressure   | MPa  | 1.5  |          |                           |                |         |                   |
|                    | kgf/cm <sup>2</sup>  | 15   |          |                           |                |         |                   |
|                    | bar  | 15   |          |                           |                |         |                   |
|                    | PSI  | 218  |          |                           |                |         |                   |
| Seal material      | Nitrile rubber   | Mark | NBR (SG) | Working temperature range | -20°C to +60°C | Remarks | Standard material |

### Specifications (Hi Cupla for Connection to Braided Hoses)

|                   |                         |       |          |                           |                |         |                   |
|-------------------|-------------------------|-------|----------|---------------------------|----------------|---------|-------------------|
| Body material     | Steel (Chrome-plated)   | Brass |          |                           |                |         |                   |
| Braided hose size | For ø9 mm x ø15 mm hose |       |          |                           |                |         |                   |
| Working pressure  | MPa                     | 1.5   | 1.0      |                           |                |         |                   |
|                   | kgf/cm <sup>2</sup>     | 15    | 10       |                           |                |         |                   |
|                   | bar                     | 15    | 10       |                           |                |         |                   |
|                   | PSI                     | 218   | 145      |                           |                |         |                   |
| Seal material     | Nitrile rubber          | Mark  | NBR (SG) | Working temperature range | -20°C to +80°C | Remarks | Standard material |

Working pressure and temperature range of PN/SN type for braided hoses depends upon the specification of the braided hose to be used.

### Tightening Torque Range

Nm (kgf·cm)

| Model  | SN, PN, SNR Type    | 65SNG, PNG, SNRG Type | 85SNG, PNG, SNRG Type |
|--------|---------------------|-----------------------|-----------------------|
| Torque | 9 to 11 {92 to 112} | 5 to 6 {51 to 61}     | 7 to 8 {71 to 82}     |

To mount on braided hose or urethane hose, slide it over to the hose barb and tighten the nut until it is flush against the hose barb base. It is recommended that grease is applied to the inside of the nut (threaded part and hose contact part) for easy tightening.

### Flow Direction

Fluid must run from socket to plug.



### Interchangeability

Interchangeable with Hi Cupla Models 10, 17, 20, 30 and 40.  
Interchangeable with each corresponding HI Cupla Series models.

### Min. Cross-Sectional Area

(mm<sup>2</sup>)


| Socket \ Plug | 17PH | 20PH | 30PH | 40PH | 10PM | 20PM | 30PM | 40PM | 20PF | 30PF | 40PF | 90PN-BH |
|---------------|------|------|------|------|------|------|------|------|------|------|------|---------|
| 200-50SN      | 16   | 16   | 16   | 16   | 13   | 16   | 16   | 16   | 16   | 16   | 16   | 16      |
| 200-60SN      | 16   | 20   | 22   | 22   | 13   | 22   | 22   | 22   | 22   | 22   | 22   | 22      |
| 200-65SN      | 16   | 20   | 22   | 22   | 13   | 22   | 22   | 22   | 22   | 22   | 22   | 22      |
| 200-80SN      | 16   | 20   | 41   | 41   | 13   | 41   | 41   | 41   | 41   | 41   | 41   | 41      |
| 200-85SN      | 16   | 20   | 41   | 41   | 13   | 41   | 41   | 41   | 41   | 41   | 41   | 41      |
| 200-110SN     | 16   | 20   | 41   | 41   | 13   | 41   | 41   | 41   | 41   | 41   | 41   | 41      |
| 200-50SNG     | 16   | 16   | 16   | 16   | 13   | 16   | 16   | 16   | 16   | 16   | 16   | 16      |
| 200-65SNG     | 16   | 20   | 22   | 22   | 13   | 22   | 22   | 22   | 22   | 22   | 22   | 22      |
| 200-85SNG     | 16   | 20   | 40   | 41   | 13   | 41   | 41   | 41   | 41   | 41   | 41   | 41      |
| 90SN-BH       | 16   | 20   | 33   | 33   | 13   | 33   | 33   | 33   | 33   | 33   | 33   | 33      |

### Suitability for Vacuum


Not suitable for vacuum application in either connected or disconnected condition.

### Pressure - Flow Characteristics

[Test conditions] • Fluid : Air • Temperature : Room temperature

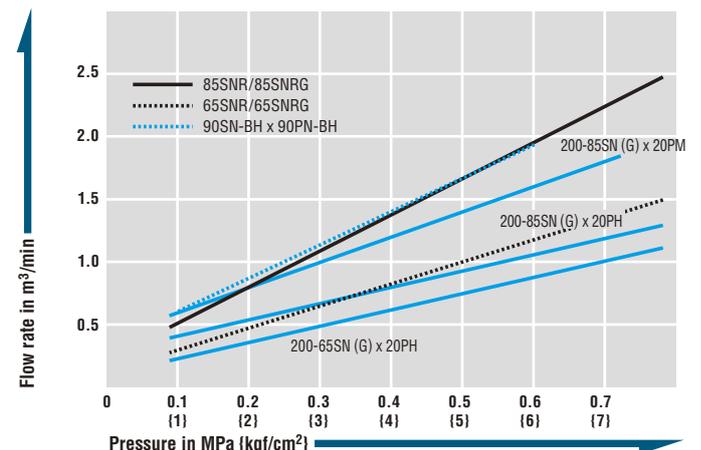


**Plug PN type (Hi Cupla for connection to braided hoses)**

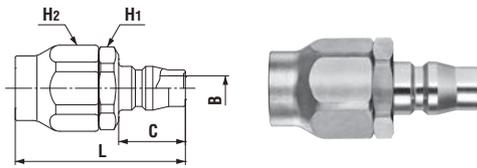

Grease is applied to the threaded part of steel nut to prevent galling.

| Model   | Application (Hose) | Wall Thickness (mm) | Body material*Mass (g) |       | Dimensions (mm) |         |         |    |     |
|---------|--------------------|---------------------|------------------------|-------|-----------------|---------|---------|----|-----|
|         |                    |                     | Steel                  | Brass | L               | H1(WAF) | H2(WAF) | C  | øB  |
| 90PN-BH | ø9 x ø15           | 3±0.3               | 86                     | 88    | (51)            | Hex.23  | Hex.24  | 20 | 7.5 |


**Socket SN type (Hi Cupla for connection to braided hoses)**

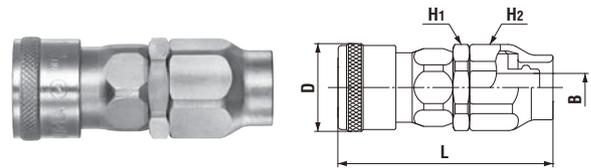

Grease is applied to the threaded part of steel nut to prevent galling.

| Model   | Application (Hose) | Wall Thickness (mm) | Body material*Mass (g) |       | Dimensions (mm) |                      |         |         |     |
|---------|--------------------|---------------------|------------------------|-------|-----------------|----------------------|---------|---------|-----|
|         |                    |                     | Steel                  | Brass | L               | øD                   | H1(WAF) | H2(WAF) | øB  |
| 90SN-BH | ø9 x ø15           | 3±0.3               | 147                    | 154   | (64.5)          | (26.5) <sup>-1</sup> | Hex.24  | Hex.24  | 8.5 |


**Plug PN type (For urethane hose connection)**

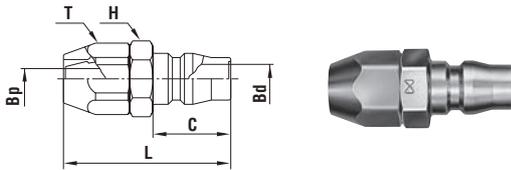

Grease is applied to the threaded part of stainless steel nut to prevent galling.

| Model | Application (Hose) | Body material*Mass (g) |                 | Dimensions (mm) |    |     |     |        |        |
|-------|--------------------|------------------------|-----------------|-----------------|----|-----|-----|--------|--------|
|       |                    | Steel                  | Stainless steel | L               | C  | øBp | øBd | H(WAF) | T(WAF) |
| 50PN  | ø5 x ø8            | 30                     | -               | (43)            | 20 | 4.5 | 7.5 | Hex.17 | Hex.17 |
| 60PN  | ø6 x ø9            | 40                     | -               | (43)            | 20 | 5.3 | 7.5 | Hex.17 | Hex.17 |
| 65PN  | ø6.5 x ø10         | 42                     | 43              | (43)            | 20 | 5.3 | 7.5 | Hex.17 | Hex.17 |
| 80PN  | ø8 x ø12           | 50                     | 52              | (45)            | 20 | 7.5 | 7.5 | Hex.19 | Hex.19 |
| 85PN  | ø8.5 x ø12.5       | 52                     | 53              | (45)            | 20 | 7.5 | 7.5 | Hex.19 | Hex.19 |
| 110PN | ø11 x ø16          | 75                     | -               | (52)            | 20 | 7.5 | 7.5 | Hex.23 | Hex.24 |


**Socket SN type (For urethane hose connection)**

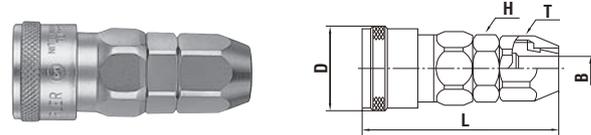

Grease is applied to the threaded part of stainless steel nut to prevent galling.


| Model | Application (Hose) | Body material*Mass (g) |                 | Dimensions (mm) |                      |     |        |        |
|-------|--------------------|------------------------|-----------------|-----------------|----------------------|-----|--------|--------|
|       |                    | Steel                  | Stainless steel | L               | øD                   | øB  | H(WAF) | T(WAF) |
| 50SN  | ø5 x ø8            | 117                    | -               | (60)            | (26.5)               | 4.5 | Hex.19 | Hex.17 |
| 60SN  | ø6 x ø9            | 115                    | -               | (59.5)          | (26.5)               | 5.3 | Hex.19 | Hex.17 |
| 65SN  | ø6.5 x ø10         | 115                    | 110             | (59.5)          | (26.5) <sup>-2</sup> | 5.3 | Hex.19 | Hex.17 |
| 80SN  | ø8 x ø12           | 120                    | 114             | (61.5)          | (26.5) <sup>-2</sup> | 7.5 | Hex.19 | Hex.19 |
| 85SN  | ø8.5 x ø12.5       | 120                    | 115             | (61.5)          | (26.5) <sup>-2</sup> | 7.5 | Hex.19 | Hex.19 |
| 110SN | ø11 x ø16          | 153                    | -               | (64.5)          | (26.5)               | 10  | Hex.23 | Hex.24 |

**Socket SN type (For urethane hose connection)**

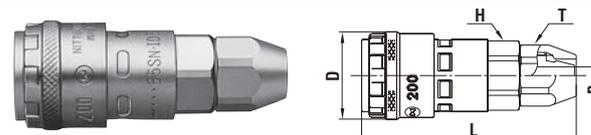


| Model     | Application (Hose) | Mass (g) | Dimensions (mm) |        |     |        |        |
|-----------|--------------------|----------|-----------------|--------|-----|--------|--------|
|           |                    |          | L               | øD     | øB  | H(WAF) | T(WAF) |
| 200-50SN  | ø5 x ø8            | 105      | (64.5)          | (26.5) | 4.5 | Hex.19 | Hex.17 |
| 200-60SN  | ø6 x ø9            | 105      | (64.5)          | (26.5) | 5.3 | Hex.19 | Hex.17 |
| 200-65SN  | ø6.5 x ø10         | 106      | (64.5)          | (26.5) | 5.3 | Hex.19 | Hex.17 |
| 200-80SN  | ø8 x ø12           | 112      | (66.5)          | (26.5) | 7.5 | Hex.19 | Hex.19 |
| 200-85SN  | ø8.5 x ø12.5       | 113      | (66.5)          | (26.5) | 7.5 | Hex.19 | Hex.19 |
| 200-110SN | ø11 x ø16          | 127      | (62)            | (26.5) | 10  | Hex.23 | Hex.24 |

**Plug PNG type (For urethane hose with hose guard nut connection)**

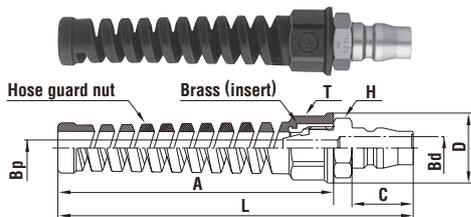


| Model    | Application (Hose) | Mass (g) | Dimensions (mm) |    |    |    |     |     | H(WAF) | T(WAF) |
|----------|--------------------|----------|-----------------|----|----|----|-----|-----|--------|--------|
|          |                    |          | L               | C  | A  | øD | øBp | øBd |        |        |
| 50PNG *3 | ø5 x ø8            | 41       | (116)           | 20 | 90 | 23 | 4.5 | 7.5 | Hex.17 | Hex.19 |
| 65PNG    | ø6.5 x ø10         | 43       | (116)           | 20 | 90 | 23 | 5.3 | 7.5 | Hex.17 | Hex.19 |
| 85PNG    | ø8.5 x ø12.5       | 55       | (116)           | 20 | 90 | 26 | 7.5 | 7.5 | Hex.19 | Hex.22 |

**Socket SNG type (For urethane hose with hose guard nut connection)**

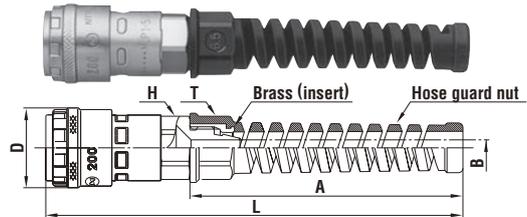


| Model        | Application (Hose) | Mass (g) | Dimensions (mm) |    |        |     |        | H(WAF) | T(WAF) |
|--------------|--------------------|----------|-----------------|----|--------|-----|--------|--------|--------|
|              |                    |          | L               | A  | øD     | øB  |        |        |        |
| 200-50SNG *3 | ø5 x ø8            | 105      | (137.5)         | 90 | (26.5) | 4.5 | Hex.19 | Hex.19 |        |
| 200-65SNG    | ø6.5 x ø10         | 107      | (137.5)         | 90 | (26.5) | 5.3 | Hex.19 | Hex.19 |        |
| 200-85SNG    | ø8.5 x ø12.5       | 116      | (137.5)         | 90 | (26.5) | 7.5 | Hex.19 | Hex.22 |        |

**Socket SNR type (With ball bearing swivel mechanism)**

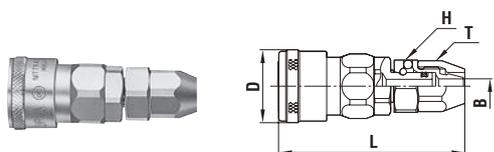

| Model | Application (Hose) | Mass (g) | Dimensions (mm) |        |     |        |        |
|-------|--------------------|----------|-----------------|--------|-----|--------|--------|
|       |                    |          | L               | øD     | øB  | H(WAF) | T(WAF) |
| 65SNR | ø6.5 x ø10         | 120      | (67.3)          | (26.5) | 5.3 | Hex.19 | Hex.17 |
| 85SNR | ø8.5 x ø12.5       | 136      | (69.3)          | (26.5) | 7.5 | Hex.21 | Hex.19 |

**Socket SNRG type (With ball bearing swivel mechanism)**

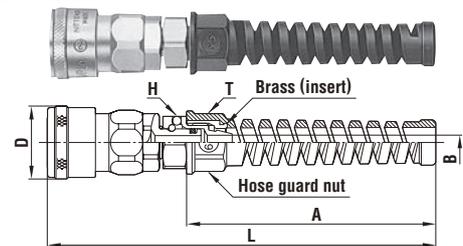

| Model  | Application (Hose) | Mass (g) | Dimensions (mm) |    |        |     |        |        |
|--------|--------------------|----------|-----------------|----|--------|-----|--------|--------|
|        |                    |          | L               | A  | øD     | øB  | H(WAF) | T(WAF) |
| 65SNRG | ø6.5 x ø10         | 121      | (140.3)         | 90 | (26.5) | 5.3 | Hex.19 | Hex.19 |
| 85SNRG | ø8.5 x ø12.5       | 139      | (140.3)         | 90 | (26.5) | 7.5 | Hex.21 | Hex.22 |

The pictures of Hi Cupla for connection to braided hoses and PN type and SN type of Nut Cupla show steel bodies. \*1: Brass: øD=25.4 \*2: Stainless steel: øD=25.4 \*3: Made-to-order item

Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.

For Low Pressure (Air)

# Lock Cupla 200

Air line coupling with sleeve safety lock feature

|                                      |                  |                  |
|--------------------------------------|------------------|------------------|
| Working pressure                     | Valve structure  | Applicable fluid |
|                                      |                  |                  |
| 1.5 MPa<br>(15 kgf/cm <sup>2</sup> ) | One-way shut-off | Air              |

Push-to-connect operation. Added easy lock design for safety!



- Locking mechanism prevents accidental disconnection after connection. Good for connections between hoses.
- Simple one push of plug and socket to each other for connection. Easy handling improves job efficiency.
- Ball bearing swivel mechanism prevents hose twists and relieves load on holding hands (SNRG type).
- To mount on hose, simply slide it over the nipple and tighten the nut (SNRG type).
- Hose guard nut to prevent hose from kinking as a standard feature (SNRG type).
- Low pressure loss valve design gives improved flow rate.

### Application Example

| Applicable fluid | Application  |
|------------------|--|
| Air              | Pneumatic tools, Pneumatic devices, Various air piping |

### Suitability for Vacuum


Not suitable for vacuum application in either connected or disconnected condition.

### Min. Cross-sectional Area (mm<sup>2</sup>)

| Plug           | 17PH | 20PH | 30PH | 40PH | 10PM | 20PM | 30PM | 40PM | 20PF | 30PF | 40PF |
|----------------|------|------|------|------|------|------|------|------|------|------|------|
| Lock Cupla 200 |      |      |      |      |      |      |      |      |      |      |      |
| L200-20SH      | 16   | 20   | 20   | 20   | 13   | 20   | 20   | 20   | 20   | 20   | 20   |
| L200-30SH      | 16   | 20   | 41   | 41   | 13   | 41   | 41   | 41   | 41   | 41   | 41   |
| L200-40SH      | 16   | 20   | 41   | 41   | 13   | 41   | 41   | 41   | 41   | 41   | 41   |
| L200-20SM      | 16   | 20   | 41   | 41   | 13   | 41   | 41   | 41   | 41   | 41   | 41   |
| L200-30SM      | 16   | 20   | 41   | 41   | 13   | 41   | 41   | 41   | 41   | 41   | 41   |
| L200-40SM      | 16   | 20   | 41   | 41   | 13   | 41   | 41   | 41   | 41   | 41   | 41   |
| L200-20SF      | 16   | 20   | 41   | 41   | 13   | 41   | 41   | 41   | 41   | 41   | 41   |
| L200-30SF      | 16   | 20   | 41   | 41   | 13   | 41   | 41   | 41   | 41   | 41   | 41   |
| L200-40SF      | 16   | 20   | 41   | 41   | 13   | 41   | 41   | 41   | 41   | 41   | 41   |
| L200-65SNRG    | 16   | 20   | 20   | 20   | 13   | 20   | 20   | 20   | 20   | 20   | 20   |
| L200-85SNRG    | 16   | 38   | 38   | 38   | 13   | 38   | 38   | 38   | 38   | 38   | 38   |

### Pressure - Flow Characteristics

[Test conditions] • Fluid : Air • Temperature : Room temperature

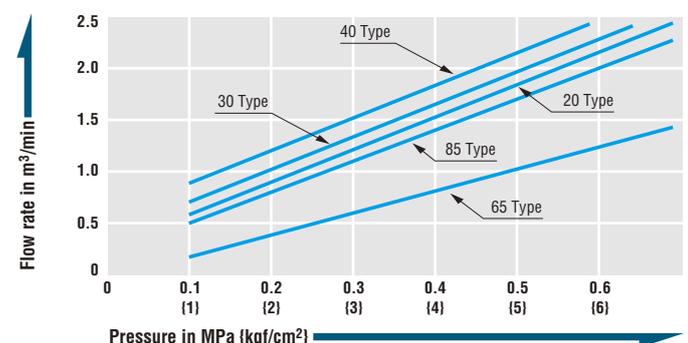

### Specifications

|                           |                      |  |          |                           |                |
|---------------------------|----------------------|--|----------|---------------------------|----------------|
| Body material             |                      | Steel (Chrome-plated)                        |          |                           |                |
| Size                      | Thread and hose barb | 1/4", 3/8", 1/2"                             |          |                           |                |
|                           | SNRG type            | For ø6.5 mm x ø10mm, ø8.5 mm x ø12.5 mm hose |          |                           |                |
| Working pressure          | MPa                  | 1.5  |          |                           |                |
|                           | kgf/cm <sup>2</sup>  | 15   |          |                           |                |
|                           | bar                  | 15   |          |                           |                |
|                           | PSI                  | 218  |          |                           |                |
| Seal material             | Nitrile rubber       | Mark   | NBR (SG) | Working temperature range | -20°C to +60°C |
| Working temperature range | Standard material    |  |          |                           |                |

### Max. Tightening Torque, Tightening Torque Range Nm (kgf-cm)

| Type of connection | Thread   |          |          | Hose guard nut    |                   |
|--------------------|----------|----------|----------|-------------------|-------------------|
| Applicable size    | 1/4"     | 3/8"     | 1/2"     | ø6.5 mm x ø10mm   | ø8.5 mm x ø12.5mm |
| Torque             | 14 {143} | 22 {224} | 60 {612} | 5 to 6 {51 to 61} | 7 to 8 {71 to 82} |

### Flow Direction

Fluid must run from socket to plug.

### Interchangeability

Can be connected with plugs for Hi Cupla Models 10, 17, 20, 30 and 40. Interchangeable with each corresponding Hi Cupla Series models.

### Models and Dimensions

WAF : WAF stands for width across flats.

#### Socket SH type (Hose barb)

| Model     | Application (Hose) | Mass (g) | Dimensions (mm) |      |      |     |
|-----------|--------------------|----------|-----------------|------|------|-----|
|           |                    |          | L               | A    | øT   | øB  |
| L200-20SH | 1/4"               | 90       | (77)            | 27.5 | 9    | 5   |
| L200-30SH | 3/8"               | 92       | (79)            | 32   | 11.3 | 7.5 |
| L200-40SH | 1/2"               | 104      | (79.5)          | 32   | 15   | 10  |

#### Socket SM type (Male thread)

| Model     | Application | Mass (g) | Dimensions (mm) |        |       |     |
|-----------|-------------|----------|-----------------|--------|-------|-----|
|           |             |          | L               | H(WAF) | T     | øB  |
| L200-20SM | Rc 1/4      | 89       | (60)            | Hex.19 | R 1/4 | 7.5 |
| L200-30SM | Rc 3/8      | 91       | (60.5)          | Hex.19 | R 3/8 | 10  |
| L200-40SM | Rc 1/2      | 102      | (56)            | Hex.24 | R 1/2 | 13  |

#### Socket SF type (Female thread)

| Model     | Application | Mass (g) | Dimensions (mm) |        |        |
|-----------|-------------|----------|-----------------|--------|--------|
|           |             |          | L               | H(WAF) | T      |
| L200-20SF | R 1/4       | 94       | (57.5)          | Hex.19 | Rc 1/4 |
| L200-30SF | R 3/8       | 103      | (55.5)          | Hex.22 | Rc 3/8 |
| L200-40SF | R 1/2       | 138      | (57.5)          | Hex.29 | Rc 1/2 |

#### Socket SNRG type (For hose with hose guard nut connection)

| Model       | Application (Hose) | Mass (g) | Dimensions (mm) |      |        |        |     |
|-------------|--------------------|----------|-----------------|------|--------|--------|-----|
|             |                    |          | L               | A    | H(WAF) | T(WAF) | øB  |
| L200-65SNRG | ø6.5 mm x ø10 mm   | 125      | (147.8)         | (90) | Hex.19 | Hex.19 | 5.3 |
| L200-85SNRG | ø8.5 mm x ø12.5 mm | 132      | (146.8)         | (90) | Hex.21 | Hex.22 | 7.5 |

Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.

For Low Pressure (Air)

# Hi Cupla Two Way Type

For bidirectional compressed air flow

Working pressure



Valve structure



Applicable fluid




**Air flows in either direction from plug or from socket side when coupled. Ideal for connection of factory air supply lines to pneumatic devices.**

- Can be connected with plugs for Hi Cupla Models 10, 17, 20, 30 and 40 and allows fluid to flow from either plug or socket side when coupled.
- Wide range of connections such as from ports on air pipes in factory to individual pneumatic devices.
- Critical structural parts are heat-treated for increased strength giving greater durability and resistance to wear.
- Available in various sizes and end configurations to suit a wide range of applications.



## Pressure - Flow Characteristics

[Test conditions] • Fluid : Air • Temperature : Room temperature

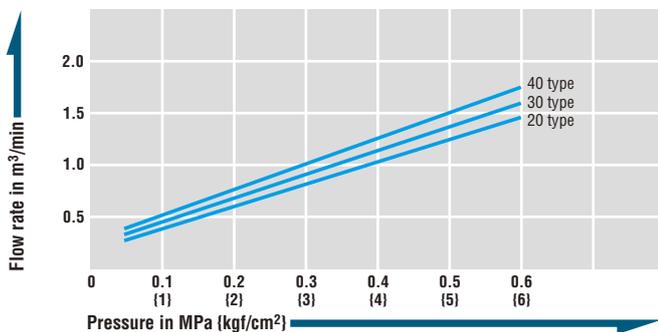

## Specifications

Body material of brass or stainless steel is available as made-to-order item.

|                           |                     |  |                           |                    |
|---------------------------|---------------------|--|---------------------------|--------------------|
| Body material             |                     | Steel (Chrome-plated)                        |                           |                    |
| Size                      | Thread              | 1/4", 3/8", 1/2"                             |                           |                    |
|                           | Hose barb           | For ø6.5 mm x ø10mm, ø8.5 mm x ø12.5 mm hose |                           |                    |
| Working pressure          | MPa                 | 1.5  |                           |                    |
|                           | kgf/cm <sup>2</sup> | 15   |                           |                    |
|                           | bar                 | 15   |                           |                    |
|                           | PSI                 | 218  |                           |                    |
| Seal material             | Seal material       | Mark   | Working temperature range | Remarks            |
| Working temperature range | Nitrile rubber      | NBR (SG)                                     | -20°C to +80°C            | Standard material  |
|                           | Fluoro rubber       | FKM (X-100)                                  | -20°C to +180°C           | Made-to-order item |

## Max. Tightening Torque

| Size (Thread) | 1/4"     | 3/8"     | 1/2"     |
|---------------|----------|----------|----------|
| Torque        | 14 (143) | 22 (224) | 60 (612) |

## Flow Direction

Fluid may flow in either direction from plug or from socket side when coupled.



## Interchangeability

Can be connected with plugs for Hi Cupla Models 10, 17, 20, 30 and 40. Interchangeable with each corresponding Hi Cupla Series models.


## Suitability for Vacuum

Not suitable for vacuum application in either connected or disconnected condition.

## Models and Dimensions


WAF : WAF stands for width across flats.

### Socket SH type (Hose barb)

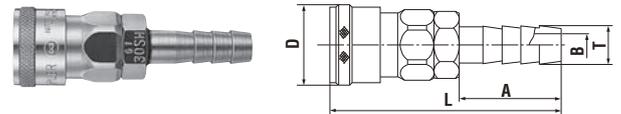


| Model  | Application (Hose) | Mass (g) | Dimensions (mm) |        |    |      |     |
|--------|--------------------|----------|-----------------|--------|----|------|-----|
|        |                    |          | L               | øD     | A  | øT   | øB  |
| TW20SH | 1/4"               | 98       | (72.5)          | (26.5) | 30 | 9    | 5   |
| TW30SH | 3/8"               | 102      | (76.5)          | (26.5) | 34 | 11.3 | 7.5 |
| TW40SH | 1/2"               | 117      | (78.5)          | (26.5) | 36 | 15   | 9   |

### Socket SM type (Male thread)

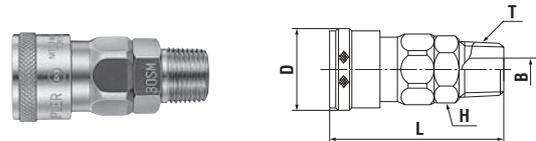

| Model  | Application | Mass (g) | Dimensions (mm) |        |        |       |    |
|--------|-------------|----------|-----------------|--------|--------|-------|----|
|        |             |          | L               | øD     | H(WAF) | T     | øB |
| TW20SM | Rc 1/4      | 95       | (55.5)          | (26.5) | Hex.19 | R 1/4 | 7  |
| TW30SM | Rc 3/8      | 109      | (56.5)          | (26.5) | Hex.19 | R 3/8 | 8  |
| TW40SM | Rc 1/2      | 116      | (59.5)          | (26.5) | Hex.23 | R 1/2 | 9  |

### Socket SF type (Female thread)

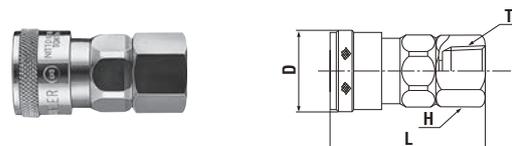

| Model  | Application | Mass (g) | Dimensions (mm) |        |        |        |
|--------|-------------|----------|-----------------|--------|--------|--------|
|        |             |          | L               | øD     | H(WAF) | T      |
| TW20SF | R 1/4       | 95       | (49.5)          | (26.5) | Hex.19 | Rc 1/4 |
| TW30SF | R 3/8       | 96       | (50.5)          | (26.5) | Hex.21 | Rc 3/8 |
| TW40SF | R 1/2       | 137      | (52.5)          | (26.5) | Hex.29 | Rc 1/2 |

Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.

For Low Pressure (Air)

# Full-Blow Cupla

Air line coupling with low pressure loss and high flow rate

Working pressure



Valve structure




Applicable fluid



**Unique full-open gate type valve mechanism realizes low pressure loss and high flow rate, which reduces required source air volume.**

- The flow rate is increased by up to 40% more than that of conventional Cuplas.
- During connection and disconnection, the valve is closed, enabling connection/disconnection under zero line pressure.
- When the sleeve of socket is returned to its original position, the purge mechanism releases the residual air pressure in the plug, eliminating an unpleasant popping noise and a hose whip back motion on disconnection.
- Built-in sleeve lock mechanism prevents accidental disconnection of Cuplas, ensuring safe operation.
- The valve can be opened and closed while the socket and plug are connected.
- The weight is reduced by 30 to 45% compared with that of conventional Cuplas.

Note: Direct mounting of Full-Blow Cupla to percussive and vibrating tools should be avoided.

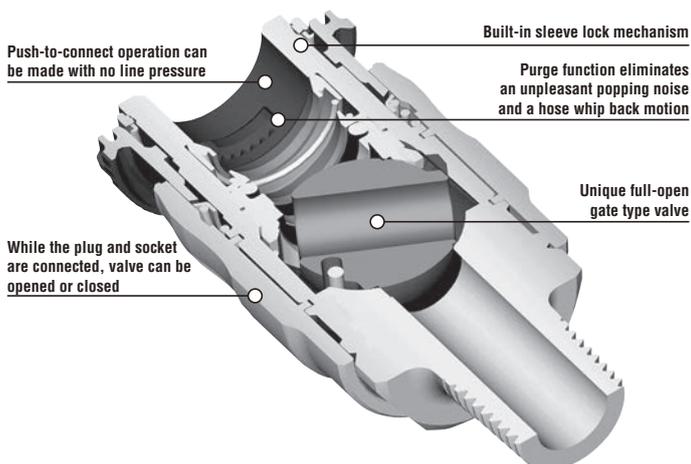

| Specifications   |                      |   |          |                           |                |         |                   |
|------------------|----------------------|---|----------|---------------------------|----------------|---------|-------------------|
| Body material    |                      | Aluminum alloy  |          |                           |                |         |                   |
| Size             | Thread and hose barb | 1/4", 3/8", 1/2"  |          |                           |                |         |                   |
|                  | SN type              | For ø6.5 mm x ø10 mm, ø8 mm x ø12 mm polyurethane hose<br>For ø8.5 mm x ø12.5 mm, ø11 mm x ø16 mm polyurethane hose |          |                           |                |         |                   |
| Working pressure | MPa                  | 1.5   |          |                           |                |         |                   |
|                  | kgf/cm <sup>2</sup>  | 15  |          |                           |                |         |                   |
|                  | bar                  | 15  |          |                           |                |         |                   |
|                  | PSI                  | 218   |          |                           |                |         |                   |
| Seal material    | Nitrile rubber       | Mark  | NBR (SG) | Working temperature range | -20°C to +60°C | Remarks | Standard material |

| Max. Tightening Torque |          | Nm (kgf·cm) |          |
|------------------------|----------|-------------|----------|
| Size (Thread)          | 1/4"     | 3/8"        | 1/2"     |
| Torque                 | 14 {143} | 22 {224}    | 60 {612} |




**Interchangeability**

Can be connected with plugs for Hi Cupla Models 10, 17, 20, 30, and 40. Interchangeable with all other Hi Cupla Series products. Please see the page for "Hi Cupla Series Interchangeability." Cannot be interchangeable with some plugs for plastic Hi Cupla 250 (discontinued product).

| Min. Cross-Sectional Area |      | (mm <sup>2</sup> ) |      |      |      |      |      |      |      |      |      |      |
|---------------------------|------|--------------------|------|------|------|------|------|------|------|------|------|------|
| Socket                    | Plug | 17PH               | 20PH | 30PH | 40PH | 10PM | 20PM | 30PM | 40PM | 20PF | 30PF | 40PF |
| FBH-20SH                  |      | 16                 | 20   | 24   | 24   | 13   | 24   | 24   | 24   | 24   | 24   | 24   |
| FBH-30SH                  |      | 16                 | 20   | 44   | 44   | 13   | 44   | 44   | 44   | 44   | 44   | 44   |
| FBH-40SH                  |      | 16                 | 20   | 44   | 44   | 13   | 44   | 44   | 44   | 44   | 44   | 44   |
| FBH-20SM                  |      | 16                 | 20   | 44   | 44   | 13   | 44   | 44   | 44   | 44   | 44   | 44   |
| FBH-30SM                  |      | 16                 | 20   | 44   | 44   | 13   | 44   | 44   | 44   | 44   | 44   | 44   |
| FBH-40SM                  |      | 16                 | 20   | 44   | 44   | 13   | 44   | 44   | 44   | 44   | 44   | 44   |
| FBH-20SF                  |      | 16                 | 20   | 44   | 44   | 13   | 44   | 44   | 44   | 44   | 44   | 44   |
| FBH-30SF                  |      | 16                 | 20   | 44   | 44   | 13   | 44   | 44   | 44   | 44   | 44   | 44   |
| FBH-40SF                  |      | 16                 | 20   | 44   | 44   | 13   | 44   | 44   | 44   | 44   | 44   | 44   |
| FBH-65SN                  |      | 16                 | 20   | 24   | 24   | 13   | 24   | 24   | 24   | 24   | 24   | 24   |
| FBH-80SN                  |      | 16                 | 20   | 44   | 44   | 13   | 44   | 44   | 44   | 44   | 44   | 44   |
| FBH-85SN                  |      | 16                 | 20   | 44   | 44   | 13   | 44   | 44   | 44   | 44   | 44   | 44   |
| FBH-110SN                 |      | 16                 | 20   | 44   | 44   | 13   | 44   | 44   | 44   | 44   | 44   | 44   |


**Suitability for Vacuum**

Not suitable for vacuum application in either connected or disconnected condition.

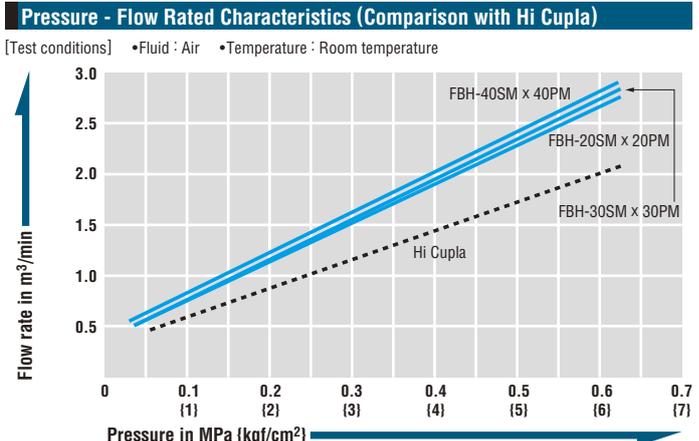


**Models and Dimensions** WAF : WAF stands for width across flats.

**Socket SH type (Hose barb)**

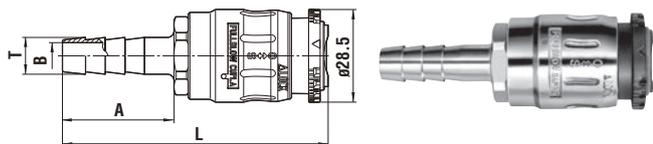


| Model    | Application (Hose) | Mass (g) | Dimensions (mm) |    |      |     |
|----------|--------------------|----------|-----------------|----|------|-----|
|          |                    |          | L               | A  | øT   | øB  |
| FBH-20SH | 1/4"               | 70       | (77)            | 30 | 9    | 5.5 |
| FBH-30SH | 3/8"               | 74       | (81)            | 34 | 11.3 | 8   |
| FBH-40SH | 1/2"               | 85       | (83)            | 36 | 15   | 10  |

**Socket SM type (Male thread)**

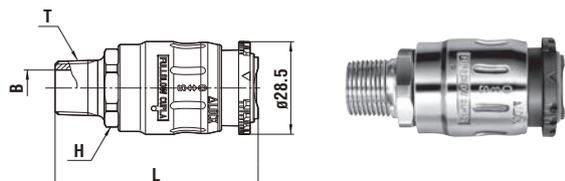


| Model    | Application | Mass (g) | Dimensions (mm) |        |       |    |
|----------|-------------|----------|-----------------|--------|-------|----|
|          |             |          | L               | H(WAF) | T     | øB |
| FBH-20SM | Rc 1/4      | 71       | (62)            | Hex.22 | R 1/4 | 8  |
| FBH-30SM | Rc 3/8      | 75       | (62)            | Hex.22 | R 3/8 | 11 |
| FBH-40SM | Rc 1/2      | 86       | (66)            | Hex.22 | R 1/2 | 15 |

**Socket SF type (Female thread)**

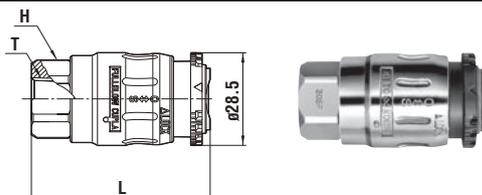

| Model    | Application | Mass (g) | Dimensions (mm) |        |        |
|----------|-------------|----------|-----------------|--------|--------|
|          |             |          | L               | H(WAF) | T      |
| FBH-20SF | R 1/4       | 77       | (54.5)          | Hex.22 | Rc 1/4 |
| FBH-30SF | R 3/8       | 69       | (54.5)          | Hex.22 | Rc 3/8 |
| FBH-40SF | R 1/2       | 90       | (61)            | Hex.26 | Rc 1/2 |

**Socket SN type (For urethane hose connection)**


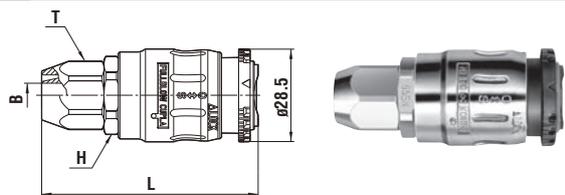


| Model     | Application (Hose) | Mass (g) | Dimensions (mm) |        |        |     |
|-----------|--------------------|----------|-----------------|--------|--------|-----|
|           |                    |          | L               | H(WAF) | T(WAF) | øB  |
| FBH-65SN  | ø6.5 mm x ø10 mm   | 64       | (64)            | Hex.22 | Hex.17 | 5.5 |
| FBH-80SN  | ø8 mm x ø12 mm     | 67       | (66)            | Hex.22 | Hex.19 | 7.5 |
| FBH-85SN  | ø8.5 mm x ø12.5 mm | 68       | (66)            | Hex.22 | Hex.19 | 7.5 |
| FBH-110SN | ø11 mm x ø16 mm    | 86       | (71)            | Hex.26 | Hex.24 | 10  |

**Features of Full-Blow Coupla**

**Up to about 40% increase in flow rate.**


Pressure loss is reduced to the ultimate level. Up to about 40% increase in flow rate compared with conventional Couplas.

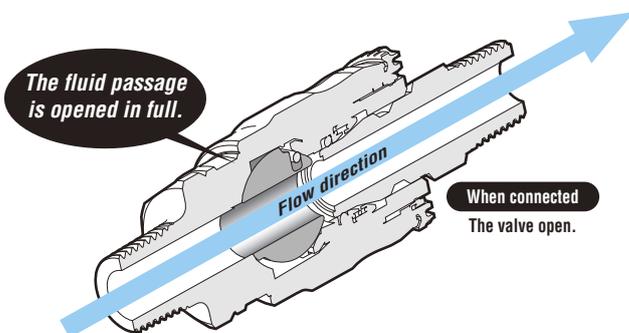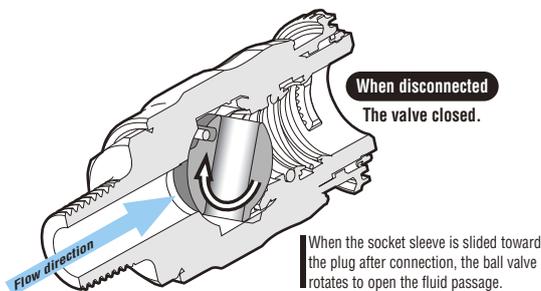

**How It Works**


**1. Open the valve**

Only after connection with the plug, you can slide the socket sleeve B toward the plug in order to open the built-in valve. Full flow path is then obtained.

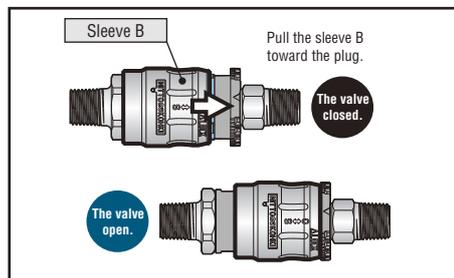


**2. Lock the sleeve**

Rotate the flange counterclockwise to lock the sleeve B. Without unlocking the plug you cannot disconnect.

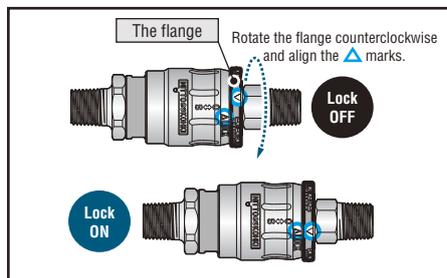

**3. Purge the residual air**

To disconnect the plug, first turn the flange back to its original position for unlocking and then pull the sleeve B back to the original position. The built-in valve will be closed to purge the residual air pressure.

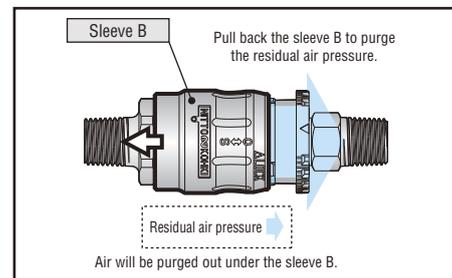

Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.

For Low Pressure (Air)

# Purge Hi Cupla

## PVR Type

Air line coupling with built-in residual air pressure release function

Working pressure



Valve structure




Applicable fluid



Connection can be made smoothly regardless of the existing pressure inside the socket.

- Push-to-connect operation. Easy one-hand operation.
- Built-in sleeve lock mechanism prevents accidental disconnection of Cuplas, ensuring safe operation.
- Upon completion of sleeve locking the valve will open to supply air.
- When the sleeve is turned back to its original position, the valve is closed and purges residual air pressure in the plug without an unpleasant popping noise and a hose whip back motion on disconnection.
- Even after connection, valve opening/closing control is possible.
- Flow rate increases by approximately 20% over that of Hi Cupla Model 400SM.
- Can be connected with plugs for Hi Cupla Models 400, 600 and 800.

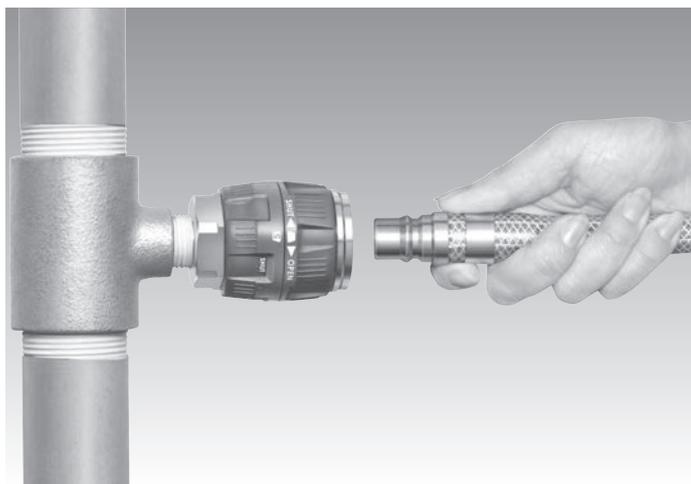

| Specifications   |   |   |          |                           |                |         |                   |
|------------------|---|---|----------|---------------------------|----------------|---------|-------------------|
| Body material    |   | Zinc alloy die casting, brass, and others |          |                           |                |         |                   |
| Size             | Thread  | 1/2", 3/4", 1"                            |          |                           |                |         |                   |
|                  | Hose barb                                     | 1/2", 3/4", 1" hose                       |          |                           |                |         |                   |
| Working pressure | MPa   | 1.5                                       |          |                           |                |         |                   |
|                  | kgf/cm <sup>2</sup>                           | 15  |          |                           |                |         |                   |
|                  | bar   | 15  |          |                           |                |         |                   |
|                  | PSI   | 218                                       |          |                           |                |         |                   |
| Seal material    | Nitrile rubber<br>Hydrogenated nitrile rubber | Mark                                      | NBR (SG) | Working temperature range | -20°C to +60°C | Remarks | Standard material |

| Max. Tightening Torque |          |          | Nm (kgf-cm) |
|------------------------|----------|----------|-------------|
| Size (Thread)          | 1/2"     | 3/4"     | 1"          |
| Torque                 | 30 (306) | 50 (510) | 65 (663)    |




**Interchangeability**  
Can be connected with plugs for Hi Cupla Models 400, 600 and 800.

| Min. Cross-Sectional Area |  | (mm <sup>2</sup> ) |       |       |       |       |       |       |       |       |
|---------------------------|--|--------------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Model                     |  | 400PH              | 600PH | 800PH | 400PM | 600PM | 800PM | 400PF | 600PF | 800PF |
| PVR-400SH                 |  | 64                 | 71    | 71    | 71    | 71    | 71    | 71    | 71    | 71    |
| PVR-600SH                 |  | 64                 | 116   | 116   | 116   | 116   | 116   | 116   | 116   | 116   |
| PVR-800SH                 |  | 64                 | 116   | 116   | 116   | 116   | 116   | 116   | 116   | 116   |
| PVR-400SM                 |  | 64                 | 116   | 116   | 116   | 116   | 116   | 116   | 116   | 116   |
| PVR-600SM                 |  | 64                 | 116   | 116   | 116   | 116   | 116   | 116   | 116   | 116   |
| PVR-800SM                 |  | 64                 | 116   | 116   | 116   | 116   | 116   | 116   | 116   | 116   |
| PVR-400SF                 |  | 64                 | 116   | 116   | 116   | 116   | 116   | 116   | 116   | 116   |
| PVR-600SF                 |  | 64                 | 116   | 116   | 116   | 116   | 116   | 116   | 116   | 116   |
| PVR-800SF                 |  | 64                 | 116   | 116   | 116   | 116   | 116   | 116   | 116   | 116   |

**Suitability for Vacuum**  
Not suitable for vacuum application in either connected or disconnected condition.


**Pressure - Flow Rated Characteristics**

[Test conditions] •Fluid : Air •Temperature : Room temperature

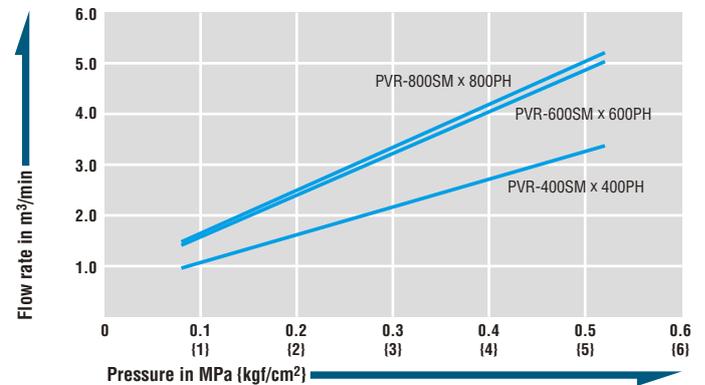


**Models and Dimensions** WAF : WAF stands for width across flats.

**Socket SH type (Hose barb)**

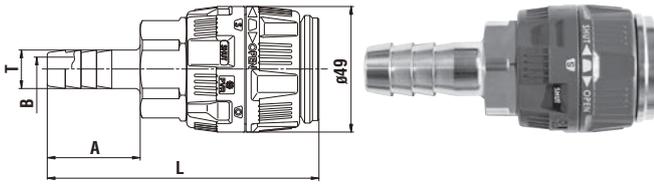


| Model     | Application (Hose) | Mass (g) | Dimensions (mm) |    |    |     |
|-----------|--------------------|----------|-----------------|----|----|-----|
|           |                    |          | L               | A  | øT | øB  |
| PVR-400SH | 1/2"               | 380      | (105)           | 36 | 15 | 9.5 |
| PVR-600SH | 3/4"               | 361      | (109)           | 45 | 21 | 14  |
| PVR-800SH | 1"                 | 440      | (118)           | 55 | 27 | 16  |

**Socket SM type (Male thread)**

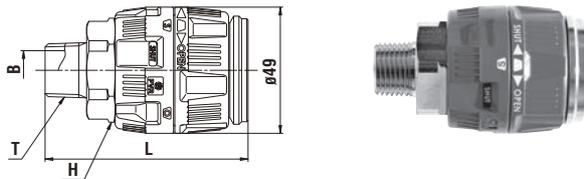

| Model     | Application | Mass (g) | Dimensions (mm) |        |       |    |
|-----------|-------------|----------|-----------------|--------|-------|----|
|           |             |          | L               | H(WAF) | T     | øB |
| PVR-400SM | Rc 1/2      | 327      | (78)            | Hex.35 | R 1/2 | 14 |
| PVR-600SM | Rc 3/4      | 345      | (82)            | Hex.35 | R 3/4 | 18 |
| PVR-800SM | Rc 1        | 374      | (84)            | Hex.35 | R 1   | 24 |

**Socket SF type (Female thread)**

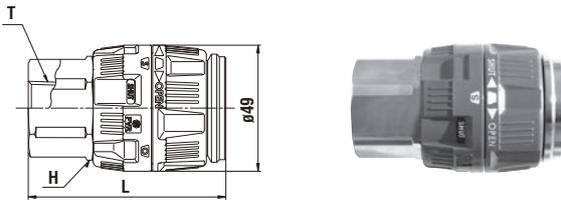


| Model     | Application | Mass (g) | Dimensions (mm) |        |        |
|-----------|-------------|----------|-----------------|--------|--------|
|           |             |          | L               | H(WAF) | T      |
| PVR-400SF | R 1/2       | 394      | (76)            | Hex.35 | Rc 1/2 |
| PVR-600SF | R 3/4       | 370      | (77)            | Hex.35 | Rc 3/4 |
| PVR-800SF | R 1         | 440      | (82)            | Hex.41 | Rc 1   |

**Function of Purge Hi Cupla PVR Type**


**1. Connection**

Valve opening/closing operation and plug connection to socket can be made independently. Push-to-connect operation is achieved regardless of existing pressure inside the pipe.

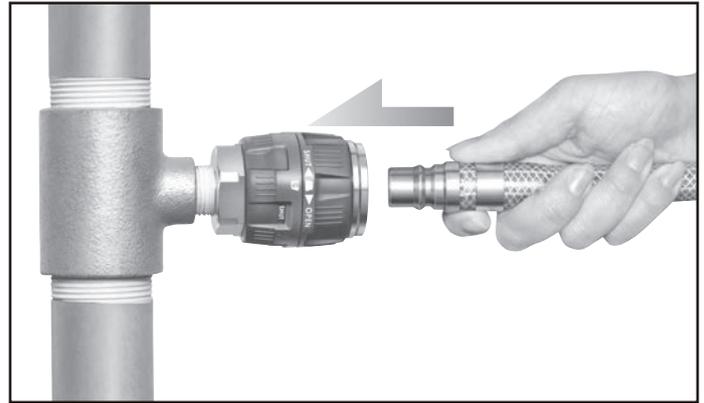


**2. Open the valve and lock the sleeve.**

Turning the operation ring will open the valve in the socket to supply air and lock the sleeve to prevent accidental disconnection.

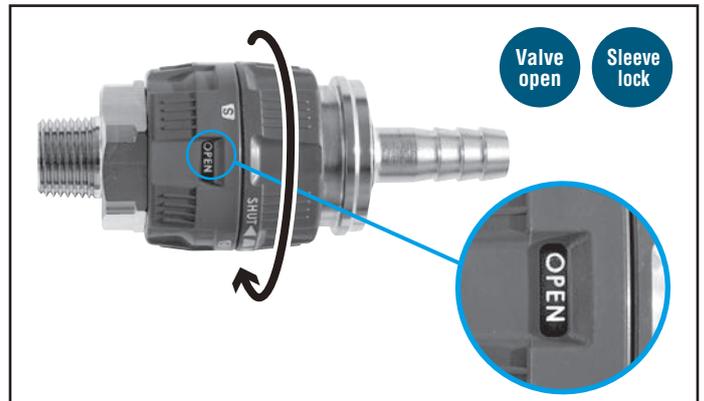


**3. Close the valve and unlock the sleeve**

Turning the operation ring back to its original position will close the valve and stop air flow, release the residual air pressure in the plug, and unlock the sleeve.

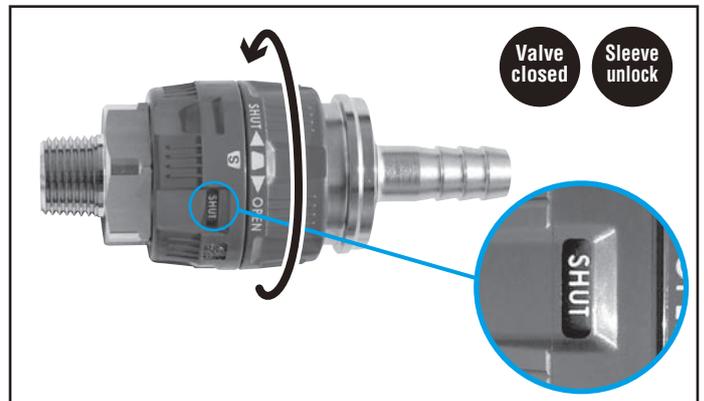

**4. Disconnection**

Disconnection can be made without an unpleasant popping noise and a hose whip back motion due to no residual air pressure inside the plug.

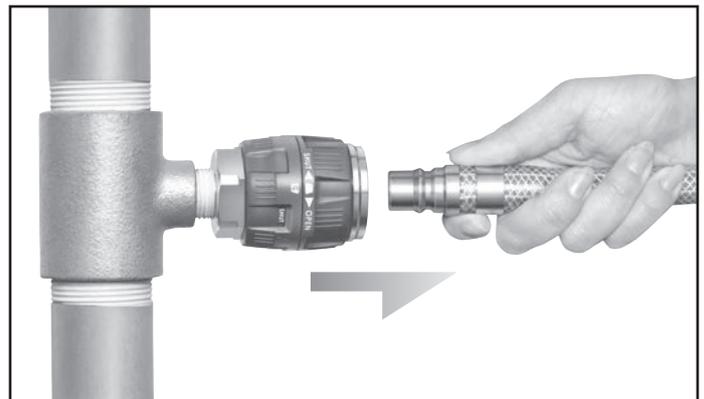

For Low Pressure (Air)


# Purge Hi Cupla

Air line coupling with residual pressure release function

|                                      |                  |                  |
|--------------------------------------|------------------|------------------|
| Working pressure                     | Valve structure  | Applicable fluid |
|                                      |                  |                  |
| 1.0 MPa<br>(10 kgf/cm <sup>2</sup> ) | One-way shut-off | Air              |

**Push-to-connect operation even with existing internal pressure! Eliminates an unpleasant popping noise and a hose whip back motion on disconnection.**

- Just push in the plug for connection regardless of internal pressure in socket.
- Even after connection, lever operation gives perfect control over valve opening/closing.
- In disconnection, lever action releases residual air pressure in the plug without an unpleasant popping noise and a hose whip back motion.
- Safe design prevents lever-operated valve from opening when plug is not connected.

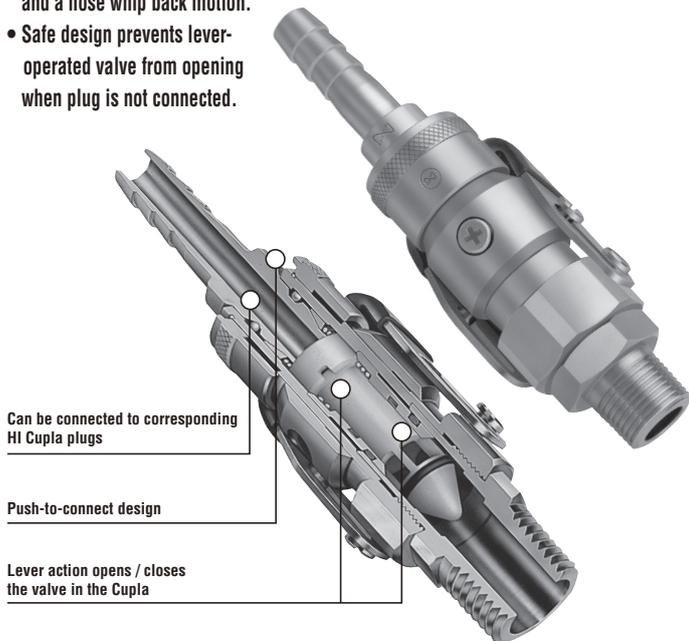

## How to Operate

|          |  |   |
|----------|--|---|
| <b>1</b> |  | Just push the plug into socket. (In this stage the valve of the socket is not open.)  |
| <b>2</b> |  | Turning down the lever opens the valve and allows the fluid flow. (The turned-down lever works as a sleeve stopper and prevents disconnection.)   |
| <b>3</b> |  | When the lever is pulled up, residual air pressure in the plug is purged without an unpleasant popping noise and a hose whip back motion on disconnection. In this stage, the socket valve is still closed. |

| Specifications   |                        |      |          |                           |                |         |                   |
|------------------|------------------------|------|----------|---------------------------|----------------|---------|-------------------|
| Body material    | Brass (Chrome-plated)  |      |          |                           |                |         |                   |
| Size (Thread)    | 1/4", 3/8", 1/2", 3/4" |      |          |                           |                |         |                   |
| Working pressure | MPa                    | 1.0  |          |                           |                |         |                   |
|                  | kgf/cm <sup>2</sup>    | 10   |          |                           |                |         |                   |
|                  | bar                    | 10   |          |                           |                |         |                   |
|                  | PSI                    | 145  |          |                           |                |         |                   |
| Seal material    | Nitrile rubber         | Mark | NBR (SG) | Working temperature range | -20°C to +60°C | Remarks | Standard material |

| Max. Tightening Torque |  | Nm (kgf·cm) |          |          |          |          |
|------------------------|--|-------------|----------|----------|----------|----------|
| Model                  |  | PV-20SM     | PV-30SM  | PV-40SM  | PV-400SM | PV-600SM |
| Torque                 |  | 9 (92)      | 11 (112) | 30 (306) | 30 (306) | 50 (510) |

### Flow Direction

Fluid must run from socket to plug.


### Interchangeability

Models 20, 30 and 40 can be connected to plugs of Hi Cupla Models 10, 17, 20, 30 and 40. Models 400, 600 can be connected to plugs of Hi Cupla Models 400, 600 and 800. Interchangeable with each corresponding Hi Cupla Series models.

| Min. Cross-Sectional Area |  | (mm <sup>2</sup> ) |         |         |          |          |
|---------------------------|--|--------------------|---------|---------|----------|----------|
| Model                     |  | PV-20SM            | PV-30SM | PV-40SM | PV-400SM | PV-600SM |
| Min. cross-sectional area |  | 38                 | 41      | 41      | 94       | 94       |


### Suitability for Vacuum

Not suitable for vacuum application in either connected or disconnected condition.

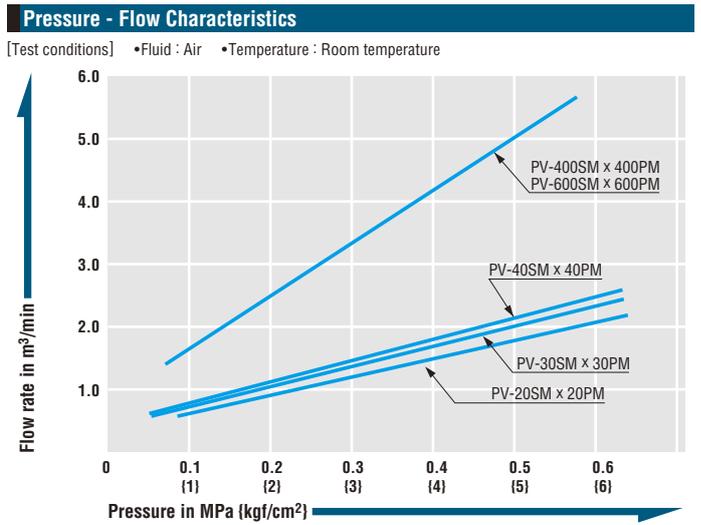

## Models and Dimensions

WAF : WAF stands for width across flats.

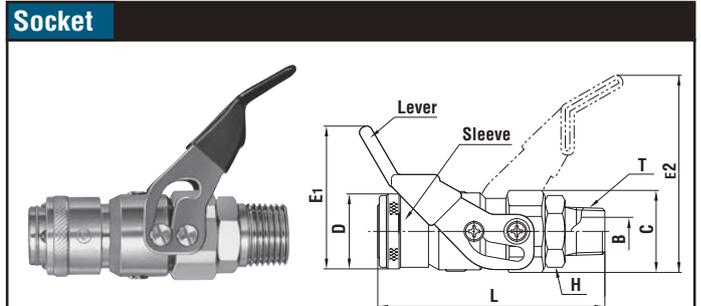

| Model    | Application | Mass (g) | Dimensions (mm) |      |                |                |        |      |       |    |
|----------|-------------|----------|-----------------|------|----------------|----------------|--------|------|-------|----|
|          |             |          | L               | øD   | E <sub>1</sub> | E <sub>2</sub> | H(WAF) | øC   | T     | øB |
| PV-20SM  | Rc 1/4      | 225      | (79)            | 26.5 | (50.5)         | (70)           | Hex.22 | 29   | R 1/4 | 7  |
| PV-30SM  | Rc 3/8      | 229      | (80)            | 26.5 | (50.5)         | (70)           | Hex.22 | 29   | R 3/8 | 10 |
| PV-40SM  | Rc 1/2      | 235      | (82)            | 26.5 | (50.5)         | (70)           | Hex.22 | 29   | R 1/2 | 14 |
| PV-400SM | Rc 1/2      | 411      | (94)            | 35   | (61.5)         | (82)           | Hex.30 | 37.5 | R 1/2 | 13 |
| PV-600SM | Rc 3/4      | 424      | (97)            | 35   | (61.5)         | (82)           | Hex.30 | 37.5 | R 3/4 | 18 |

Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.

For Low Pressure (Air)

# Purge Line Cupla

Simple air line coupling manifold with residual pressure release function

Working pressure



Valve structure




Applicable fluid



## Residual pressure can be released by a mere lever turn. Very smooth connection/disconnection!

- Single action, just push in the plug to connect regardless of internal pressure in socket.
- No unpleasant noise of air pressure discharge and no hose whip back motion on disconnection for safety operation.
- Safe design – socket valve will not open or close unless plug is connected.
- Even after connection, a lever turn will open/close valve with perfect control of air flow or line shut-off.
- Enables simultaneous air supply to three outlets from a single air line.  
(A single outlet Purge Hi Cupla is also available – see the pages of Purge Hi Cupla for details.)

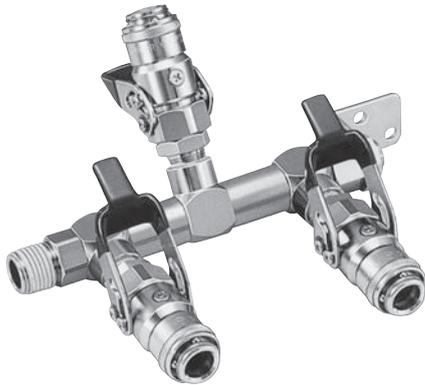

### Application Example



### Specifications

|                  |                       |                  |          |                           |                |         |                   |
|------------------|-----------------------|------------------|----------|---------------------------|----------------|---------|-------------------|
| Body material    | Brass (Chrome-plated) |                  |          |                           |                |         |                   |
| Size             | Inlet                 | R 1/2            |          |                           |                |         |                   |
|                  | Outlet                | Socket (PV-30SM) |          |                           |                |         |                   |
| Working pressure | MPa                   | 1.0              |          |                           |                |         |                   |
|                  | kgf/cm <sup>2</sup>   | 10               |          |                           |                |         |                   |
|                  | bar                   | 10               |          |                           |                |         |                   |
|                  | PSI                   | 145              |          |                           |                |         |                   |
| Seal material    | Nitrile rubber        | Mark             | NBR (SG) | Working temperature range | -20°C to +60°C | Remarks | Standard material |

### Max. Tightening Torque

Nm (kgf·cm)

|               |          |
|---------------|----------|
| Size (Thread) | 1/2"     |
| Torque        | 30 (306) |

### Flow Direction

Fluid must run from the intake port to the outlet ports. Please refer to the flow directions (arrows) on the "Models and Dimensions."

### Interchangeability

Can be connected with plugs for Hi Cupla Models 10, 17, 20, 30 and 40. Interchangeable with each corresponding Hi Cupla Series models.

### Min. Cross-Sectional Area

(mm<sup>2</sup>)


41

### Suitability for Vacuum

Not suitable for vacuum application in either connected or disconnected condition.

### Pressure - Flow Characteristics

[Test conditions] • Fluid : Air • Temperature : Room temperature

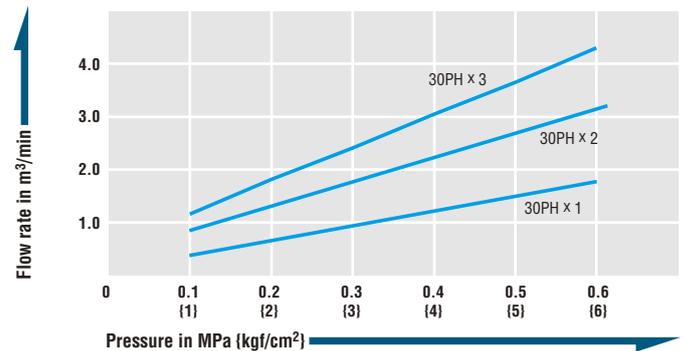


### Models and Dimensions

WAF : WAF stands for width across flats.

### Socket RE-PV-30 type (For three outlets)

Mass : 1,090g

- Fluid must run in the direction of the arrow.

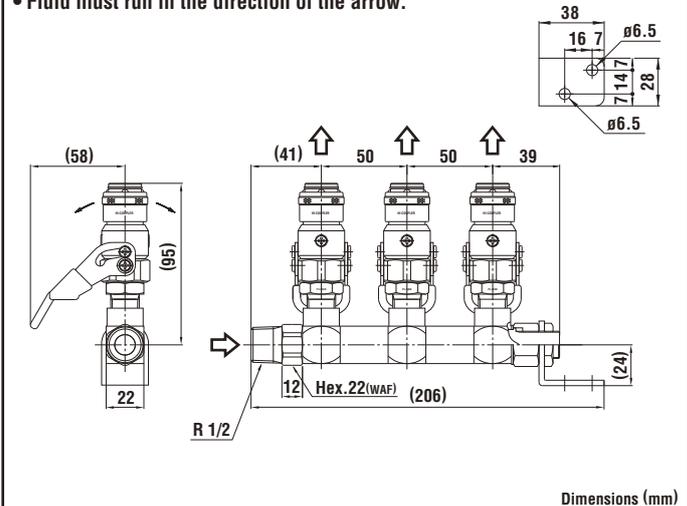

Dimensions (mm)

For Low Pressure (Air)

# Rotary Line Cupla

Simple design air line couplings on free turn manifold

Working pressure



Valve structure




Applicable fluid




Each air outlet can be turned freely to any angle independently.

- Multiple outlets are available from single air supply source.
- Sideway air outlets are rotatable to any angle. Possible hose twists can be eliminated by the component Cuplas' swivel mechanism.
- Choose either RT type (2 outlets) or RE type (3 outlets) to suit your application.

▼ RT type (comes with dust caps)

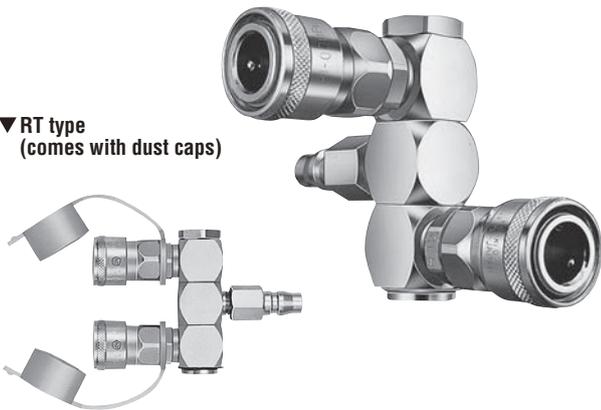

▼ RE type (comes with dust caps)

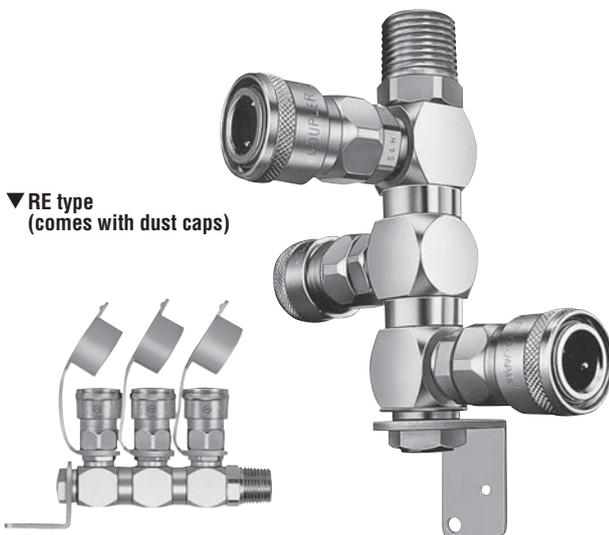

## Specifications

|                  |   |                                 |                                  |                                 |                |         |                   |
|------------------|---|---------------------------------|----------------------------------|---------------------------------|----------------|---------|-------------------|
| Body material    | Body : Brass (Chrome-plated), Cupla : Steel (Chrome-plated) |                                 |                                  |                                 |                |         |                   |
| Model            | RT Type (for two branch lines)                              |                                 | RE Type (for three branch lines) |                                 |                |         |                   |
| Size             | Inlet   | Hi Cupla Plug 20PF              | Inlet                            | R 1/2                           |                |         |                   |
|                  | Outlet  | 2 sockets for Hi Cupla Model 20 | Outlet                           | 3 sockets for Hi Cupla Model 20 |                |         |                   |
| Working pressure | MPa   | 1.5                             |                                  |                                 |                |         |                   |
|                  | kgf/cm <sup>2</sup>   | 15                              |                                  |                                 |                |         |                   |
|                  | bar   | 15                              |                                  |                                 |                |         |                   |
|                  | PSI   | 218                             |                                  |                                 |                |         |                   |
| Seal material    | Nitrile rubber  | Mark                            | NBR (SG)                         | Working temperature range       | -20°C to +60°C | Remarks | Standard material |

• The products come with dust caps.


## Max. Tightening Torque (RE Type)

Nm (kgf·cm)

|               |          |
|---------------|----------|
| Size (Thread) | 1/2"     |
| Torque        | 30 (306) |

## Fluid Flow Direction

Fluid must run from the inlet port to the outlet ports.

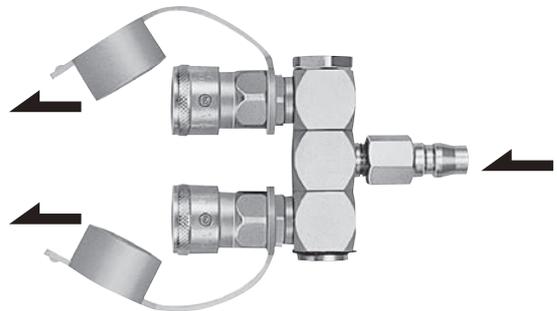

## Interchangeability

Can be connected with plugs for Hi Cupla Models 10, 17, 20, 30 and 40. Interchangeable with each corresponding Hi Cupla Series models.

## Min. Cross-Sectional Area

(mm<sup>2</sup>)


|                           |         |         |
|---------------------------|---------|---------|
| Model                     | RT type | RE type |
| Min. cross-sectional area | 33      |         |

## Suitability for Vacuum

Not suitable for vacuum application in either connected or disconnected condition.

## Pressure - Flow Characteristics


[Test conditions] • Fluid : Air • Temperature : Room temperature  
• Plug : 20PM (All the Socket valves are opened with 20PM)

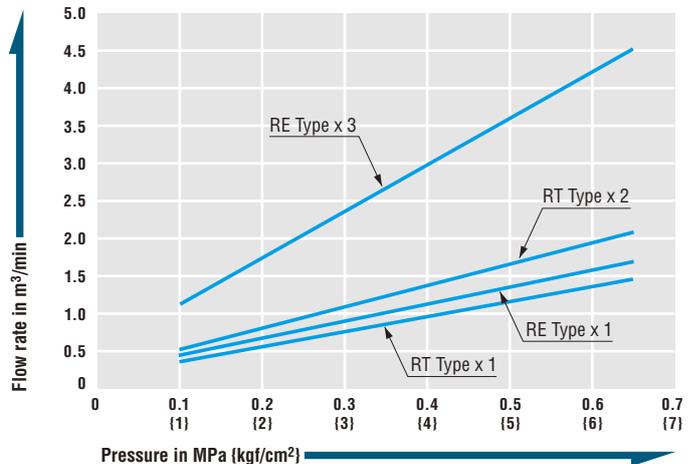

**Socket RT type (For two outlets)**

Mass : 490 g

- Fluid must run in the direction of the arrow.
- The product comes with dust caps.

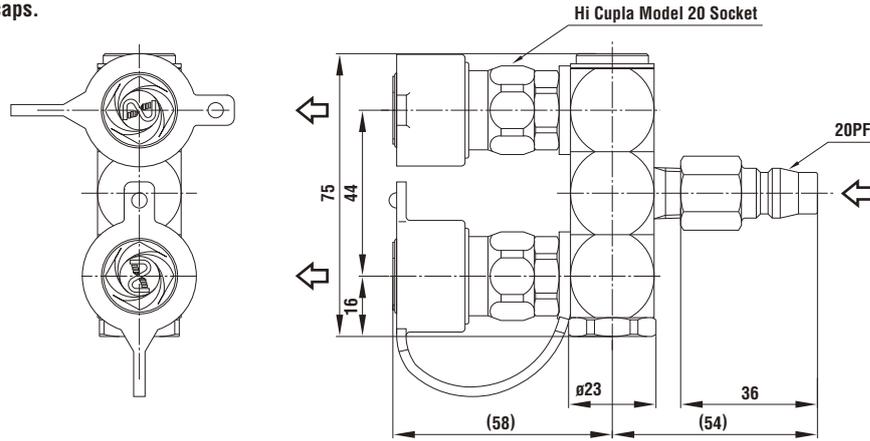


Dimensions (mm)

**Socket RE type (For three outlets)**

Mass : 660 g

- Fluid must run in the direction of the arrow.
- The product comes with dust caps.

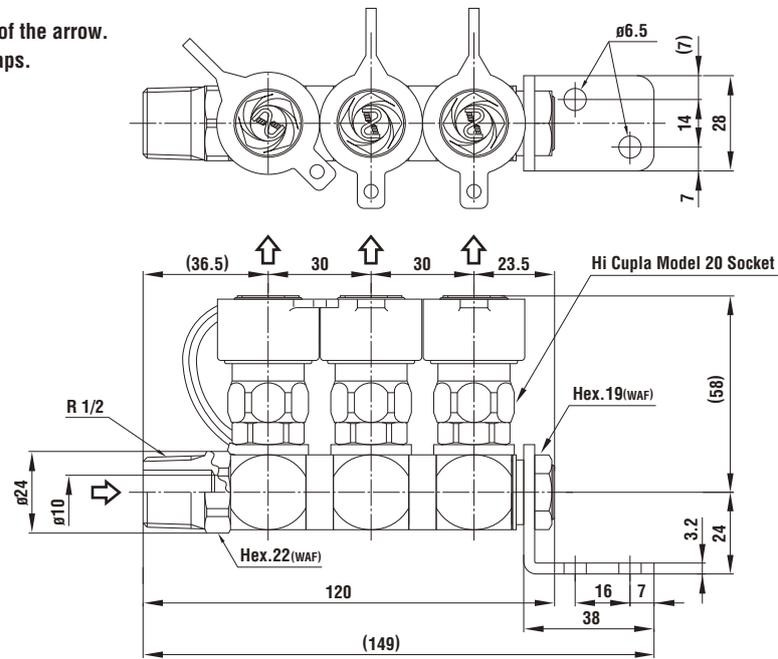

Dimensions (mm)

**Application Example**



Air line manifold

Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.

For Low Pressure (Air)

# Line Cupla

200T Type, 200L Type, 200S Type

Simple design air line coupling on manifold

Working pressure



Valve structure



Applicable fluid




## Enables several air lines to be taken simultaneously from one supply line!

- Just push in the plug into socket for simple and secure connection.
- Multiple outlets are available from single air supply source.
- Choose from the 2-outlet type (Model 200T), the 5-outlet straight type (Model 200L) and the 5-outlet star type (Model 200S) to suit your application.



200T type

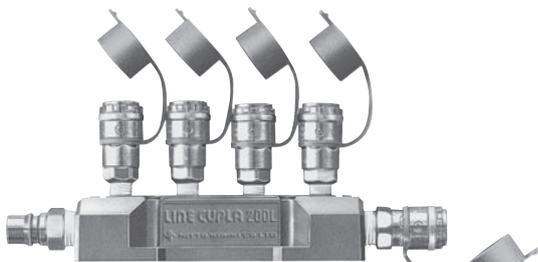

200L type  
(comes with an accessory 400SH and dust caps)



200S type  
(comes with an accessory 400SH and dust caps)


### Specifications

|                  |                     |  |  |                           |                |         |                   |
|------------------|---------------------|--|--|---------------------------|----------------|---------|-------------------|
| Body material    |                     | Body : Aluminum, Cupla : Steel (Chrome-plated) |  |                           |                |         |                   |
| Size             | Inlet               | 200T Type : 20PM                               | 200L Type / 200S Type : 400PM          |                           |                |         |                   |
|                  | Outlet              | 200T Type : 200-20SM                           | 200L Type / 200S Type : 200-20SM, 40SM |                           |                |         |                   |
| Working pressure | MPa                 | 1.5  |  |                           |                |         |                   |
|                  | kgf/cm <sup>2</sup> | 15   |  |                           |                |         |                   |
|                  | bar                 | 15   |  |                           |                |         |                   |
|                  | PSI                 | 218  |  |                           |                |         |                   |
| Seal material    | Nitrile rubber      | Mark   | NBR (SG)                               | Working temperature range | -20°C to +60°C | Remarks | Standard material |

• The products come with dustproof caps.

### Flow Direction

Fluid must run from the inlet port to the outlet ports.

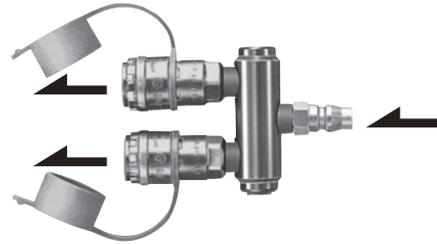

### Interchangeability

Can be connected with plugs for Hi Cupla Models 10, 17, 20, 30 and 40. Interchangeable with each corresponding Hi Cupla Series models.

### Min. Cross-Sectional Area

(mm<sup>2</sup>)


|                           |                                 |
|---------------------------|---------------------------------|
| Model                     | 200T type, 200L type, 200S type |
| Min. cross-sectional area | 19                              |

### Suitability for Vacuum

Not suitable for vacuum application in either connected or disconnected condition.

### Pressure - Flow Characteristics


[Test conditions] • Fluid : Air • Temperature : Room temperature

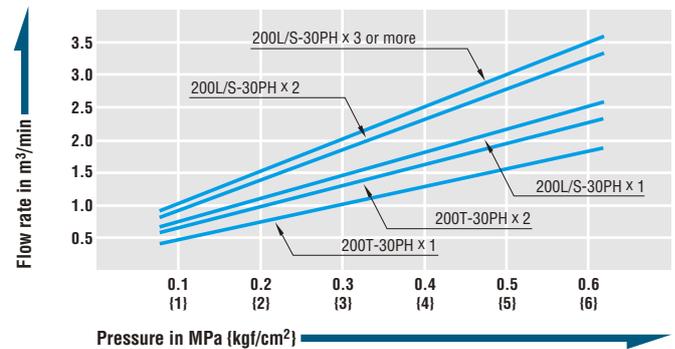

**Socket 200T type (For two outlets)**

Mass : 272 g

- Fluid must run in the direction of the arrow.
- The product comes with dust caps.

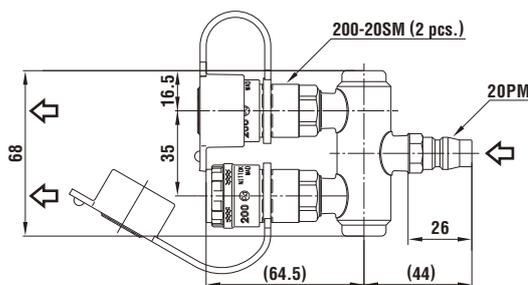


Dimensions (mm)

**Socket 200L type (For five outlets, in line type)**

Mass : 890 g

- Fluid must run in the direction of the arrow.
- The product comes with dust caps.
- Accessory : 400SH

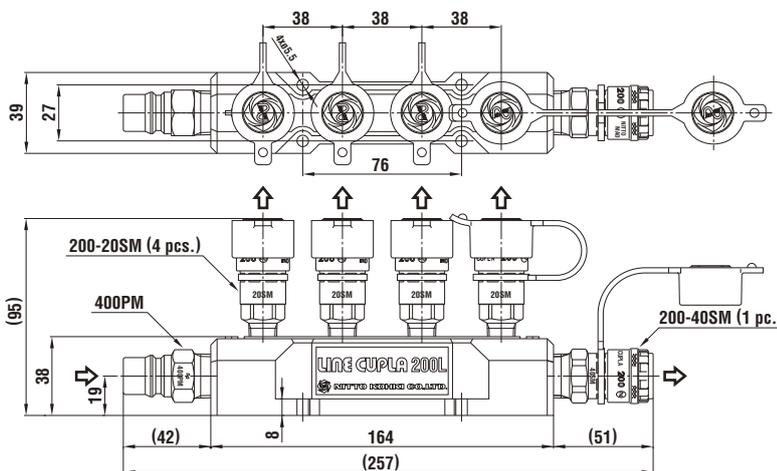


Dimensions (mm)

**Socket 200S type (For five outlets, star type)**


Mass : 769 g

- Fluid must run in the direction of the arrow.
- The product comes with dust caps.
- Accessory : 400SH

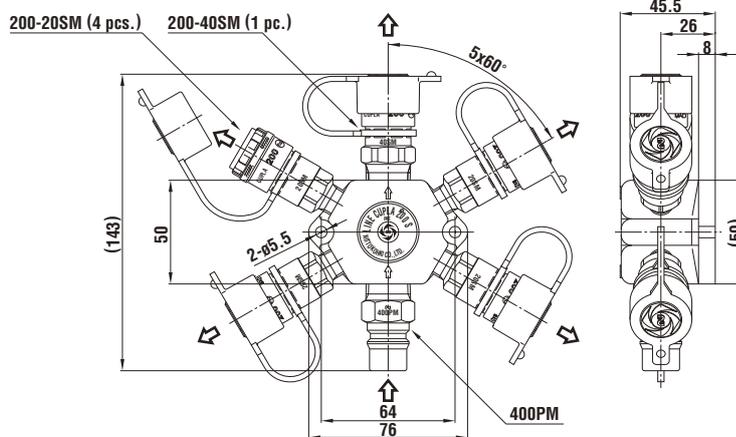


Dimensions (mm)

**Application Example**

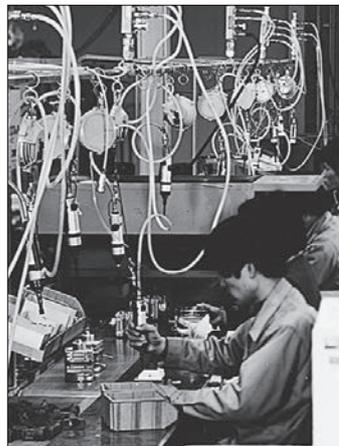

**Optional Items : Pressure Gauge and Drain Valve**

“Pressure Gauge” and “Drain Cock” are available as optional items to be mounted on Line Cupla 200.

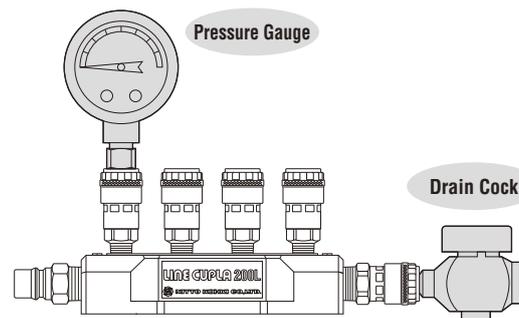

Appearance subject to change for improvement without notice.

For Low Pressure (Air)

# Rotary Full-Blow Line Cupla

Free rotating branch air line coupling with low pressure loss & high flow rate

Working pressure



Valve structure




Applicable fluid



Each air outlet can be turned freely to any angle independently.

- Multiple outlets are available from single air supply source.
- Sideway air outlets are rotatable to any angle.
- Choose either RT type (2 outlets) or RE type (3 outlets) to suit your application.
- The flow rate increases by 40% to 50% over that of conventional Cuplas.
- During connection and disconnection, the valve is closed, enabling connection/disconnection under zero line pressure.
- When the sleeve of socket is returned to its original position, the purge mechanism releases the residual pressure inside the plug, eliminating an unpleasant popping noise and a hose whip back motion.
- Built-in sleeve lock mechanism prevents accidental disconnection of Cuplas, ensuring safe operation.
- The valve can be opened and closed while the socket and plug is connected.

FBH-RT Type  
(comes with dust caps)

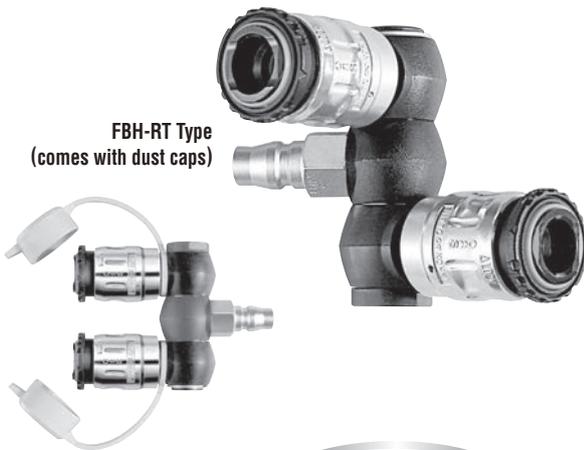

FBH-RE Type  
(comes with dust caps)



| Specifications                      |                           |                 |                             |                           |
|-------------------------------------|---------------------------|-----------------|-----------------------------|---------------------------|
| Body material                       |                           | Zinc alloy      |                             |                           |
| Size                                | RT type (For two outlets) |                 | RE type (For three outlets) |                           |
|                                     | Inlet                     | Plug (20PF)     | Inlet                       | R 1/2                     |
|                                     | Outlet                    | Full-Blow Cupla | Outlet                      | Full-Blow Cupla           |
| Working pressure                    | MPa                       | 1.5             |                             |                           |
|                                     | kgf/cm <sup>2</sup>       | 15              |                             |                           |
|                                     | bar                       | 15              |                             |                           |
|                                     | PSI                       | 218             |                             |                           |
| Seal material                       | Nitrile rubber            | Mark            | NBR (SG)                    | Working temperature range |
| Working temperature range           | -20°C to +60°C            |                 |                             |                           |
| Remarks                             |                           |                 |                             |                           |
| • The product comes with dust caps. |                           |                 |                             |                           |

| Max. Tightening Torque (FBH-RE Type) |          | Nm {kgf·cm} |
|--------------------------------------|----------|-------------|
| Size (Thread)                        | 1/2"     |             |
| Torque                               | 30 {306} |             |

**Flow Direction**

Fluid must run from the inlet port to the outlet ports.


**Interchangeability**

Can be connected with plugs for Hi Cupla Models 10, 17, 20, 30, and 40. Interchangeable with all other Hi Cupla Series products. Please see the page for "Hi Cupla Series Interchangeability." Cannot be interchangeable with some plugs for plastic Hi Cupla 250 (discontinued product).

| Min. Cross-Sectional Area (mm <sup>2</sup> ) |        |        |
|--|--------|--------|
| Model  | FBH-RT | FBH-RE |
| Min. cross-sectional area                    | 44     | 44     |

**Suitability for Vacuum**


Not suitable for vacuum application in either connected or disconnected condition.

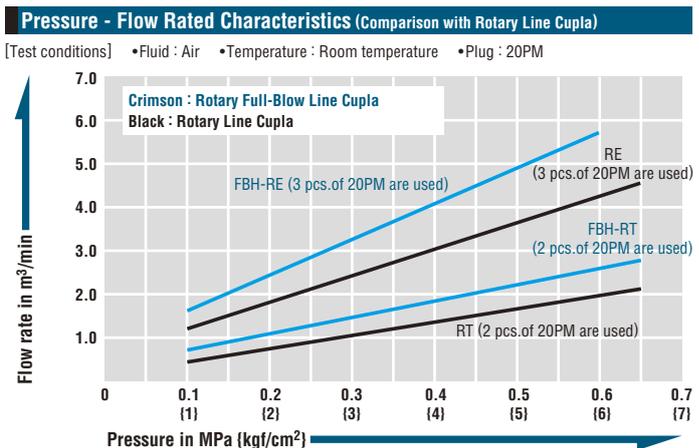

Models and Dimensions

**Socket FBH-RT type (For two branch lines)**

- Inlet : 1/4" Hi Cupla (20PFF)
- Outlet : Full-Blow Cupla
- Mass : 358 g
- Fluid must run in the direction of the arrow.

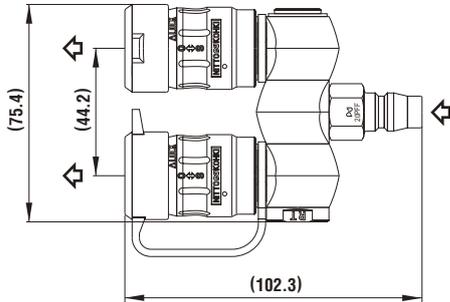


• The product comes with dust caps.

Dimensions (mm)

**Socket FBH-RE type (For three branch lines)**

- Inlet : R 1/2
- Outlet : Full-Blow Cupla
- Mass : 527 g
- Fluid must run in the direction of the arrow.

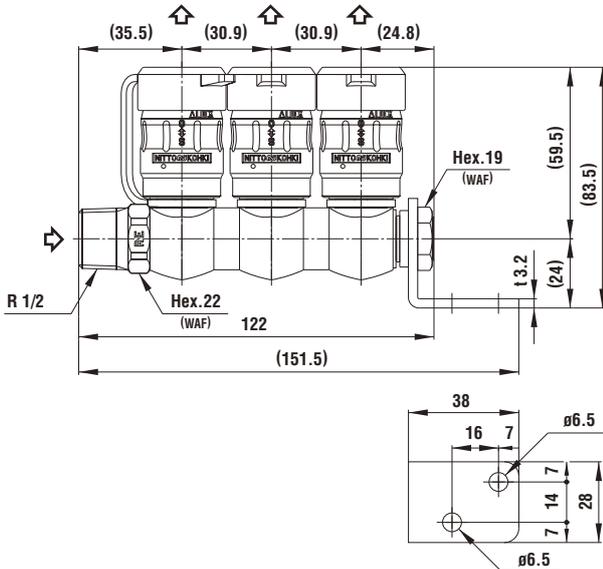


• The product comes with dust caps.

Dimensions (mm)


Features of Rotary Full-Blow Line Cupla

**Flow rate is significantly increased.**

Significant energy saving effect (Source pressure reduction effects)

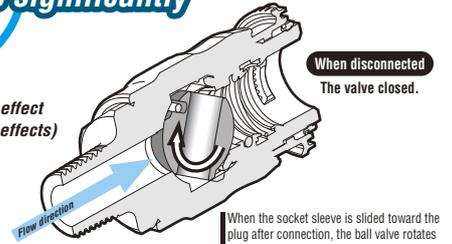

When the socket sleeve is slid toward the plug after connection, the ball valve rotates to open the fluid passage.

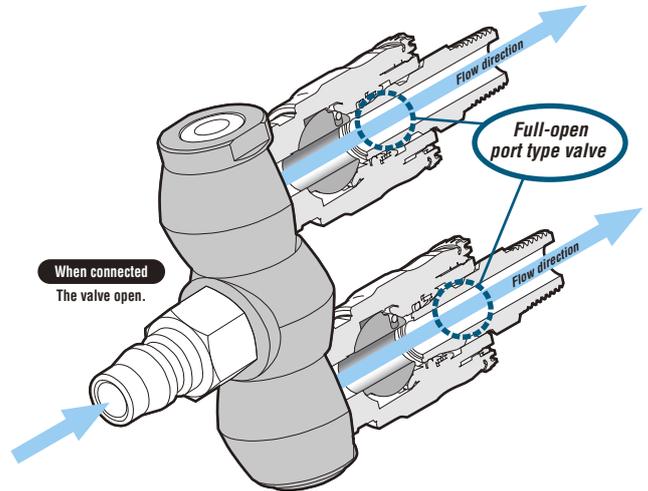

**Far easier operation**

No valve push back pressure design enables powerless connection.




**Increased safety operation**

Purge function eliminates an unpleasant popping noise and a hose whip back motion.

How It Works


**1. Open the valve**

Only after connection with the plug, you can slide the socket sleeve B toward the plug in order to open the built-in valve. Full flow path is then obtained.

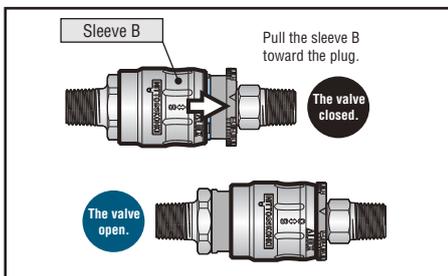


**2. Lock the sleeve**

Rotate the flange counterclockwise to lock the sleeve B. Without unlocking the plug you cannot disconnect.

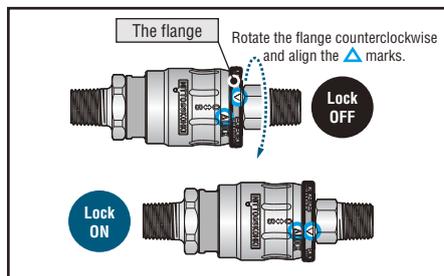

**3. Purge the residual air**

To disconnect the plug, first turn the flange back to its original position for unlocking and then pull the sleeve B back to the original position. The built-in valve will be closed to purge the residual air pressure.

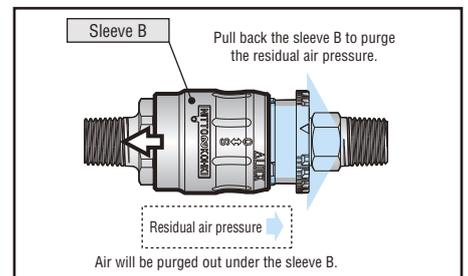

Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.

For Low Pressure

# Hi Cupla Ace

Lightweight plastic coupling with automatic safety lock for air line applications

Working pressure



Valve structure



Applicable fluid



The weight is merely a quarter of steel Hi Cupla's and smooth push-in connection is achieved. Automatic sleeve lock for safety operation.

- Pressure ratings comparable to steel Cuplas.
- A built-in "automatic lock mechanism" locks the sleeve upon connection, thus prevents accidental disconnection.
- Just push plug into socket for simple connection.
- The weight is a quarter of steel Hi Cupla for easy handling.
- Can be used for air and water.
- Less likely to damage painted or easily dented surfaces than metal couplings.
- Air flows in either direction from plug or from socket side when coupled.
- Plug and socket with hose guard nut are also available (see the pages of NK Cupla Hose / NK Cupla Coil Hose for details).



| Specifications   |                                       |  |          |                           |                |         |                   |
|------------------|---------------------------------------|--|----------|---------------------------|----------------|---------|-------------------|
| Body material    |                                       | Engineering plastics (PBT, POM)  |          |                           |                |         |                   |
| Size             | Thread and hose barb                  | 1/4", 3/8" / 1/4", 3/8"  |          |                           |                |         |                   |
|                  | PN type, SN type (PNG type, SNG type) | For ø5 mm x ø8 mm, ø6 mm x ø9 mm, ø6.5 mm x ø10 mm, ø8 mm x ø12 mm, ø8.5 mm x ø12.5 mm polyurethane hose |          |                           |                |         |                   |
|                  | T type                                | HA-T type • Inlet : 20P-PLA • Outlet : HA-65S x 2  |          |                           |                |         |                   |
| Working pressure | MPa                                   | 1.5 / 1.0 for Model HA-T   |          |                           |                |         |                   |
|                  | kgf/cm <sup>2</sup>                   | 15 / 10 for Model HA-T   |          |                           |                |         |                   |
|                  | bar                                   | 15 / 10 for Model HA-T   |          |                           |                |         |                   |
|                  | PSI                                   | 218 / 145 for Model HA-T   |          |                           |                |         |                   |
| Seal material    | Nitrile rubber                        | Mark   | NBR (SG) | Working temperature range | -20°C to +60°C | Remarks | Standard material |

| Tightening Torque Range |                          |                          |                          | Nm [kgf·cm]              |
|-------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Model                   | 20/30SM<br>20/30PM       | 50/60/65SN<br>50/60/65PN | 80/85SN<br>80/85PN       | 20PFF                    |
| Torque                  | 2.5 to 3.0<br>(26 to 31) | 1.6 to 2.0<br>(16 to 20) | 2.2 to 2.8<br>(22 to 29) | 2.0 to 2.5<br>(20 to 25) |

**Flow Direction**



Air flows in either direction from plug or from socket side when coupled.

**Interchangeability**

Can be connected with Hi Cupla Models 10, 17, 20, 30 and 40. Interchangeable with models of Nut Cupla Series and Hi Cupla Series except models 400, 600, and 800.


**Suitability for Vacuum**

Not suitable for vacuum application in either connected or disconnected condition.

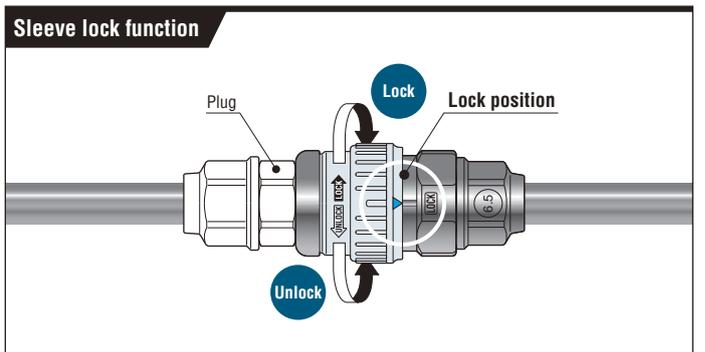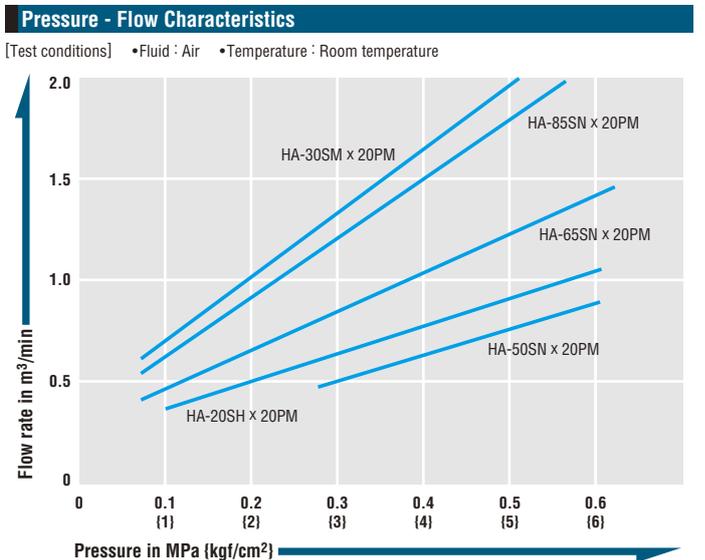


Models and Dimensions

**Plug PH type (Plastic plug / Hose barb)**

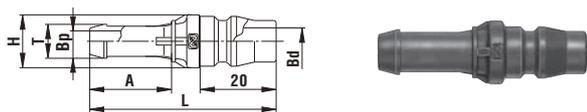


| Model    | Application (Hose) | Mass (g) | Dimensions (mm) |    |      |      |     |     |
|----------|--------------------|----------|-----------------|----|------|------|-----|-----|
|          |                    |          | L               | øH | A    | øT   | øBp | øBd |
| 20PH-PLA | 1/4"               | 3        | 49              | 14 | 21.5 | 9    | 5.5 | 7   |
| 30PH-PLA | 3/8"               | 4        | 52              | 16 | 23.5 | 11.5 | 7.5 | 7   |

**Plug PM type (Plastic plug / Male thread)**

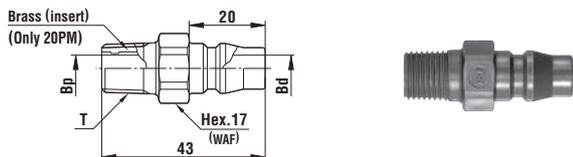


| Model    | Application | Mass (g) | Dimensions (mm) |     |     |
|----------|-------------|----------|-----------------|-----|-----|
|          |             |          | T               | øBp | øBd |
| 20PM-PLA | Rc 1/4      | 8        | R 1/4           | 7.1 | 7.4 |
| 30PM-PLA | Rc 3/8      | 6        | R 3/8           | 10  | 7.4 |

**Plug PN type (Plastic plug / For urethane hose connection)**

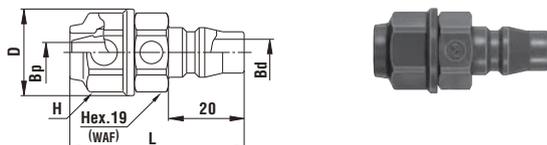


| Model    | Application (Hose) | Mass (g) | Dimensions (mm) |    |         |     |     |
|----------|--------------------|----------|-----------------|----|---------|-----|-----|
|          |                    |          | L               | øH | Hp(WAF) | øBp | øBd |
| 50PN-PLA | ø5 mm x ø8 mm      | 9        | (46)            | 23 | Hex.19  | 4   | 7   |
| 60PN-PLA | ø6 mm x ø9 mm      | 9        | (46)            | 23 | Hex.19  | 4.7 | 7   |
| 65PN-PLA | ø6.5 mm x ø10 mm   | 9        | (46)            | 23 | Hex.19  | 5.3 | 7   |
| 80PN-PLA | ø8 mm x ø12 mm     | 12       | (48.5)          | 26 | Hex.22  | 6.5 | 7   |
| 85PN-PLA | ø8.5 mm x ø12.5 mm | 12       | (48.5)          | 26 | Hex.22  | 7   | 7   |

**Plug PFF type (Plastic plug / Parallel female thread)**

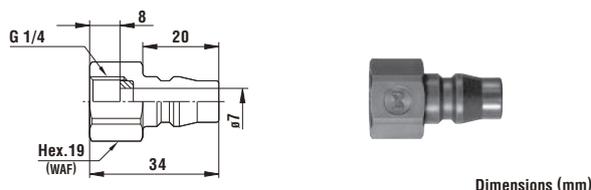


| Model     | Application | Mass (g) |
|-----------|-------------|----------|
| 20PFF-PLA | G 1/4       | 6        |

**Plug PNG type (Plastic plug / For hose with hose guard nut connection)**

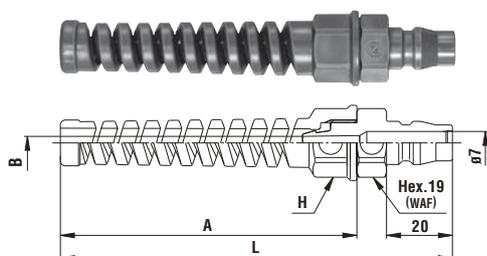


| Model     | Application (Hose) | Mass (g) | Dimensions (mm) |        |      |     |
|-----------|--------------------|----------|-----------------|--------|------|-----|
|           |                    |          | L               | H(WAF) | A    | øB  |
| 50PNG-PLA | ø5 mm x ø8 mm      | 14       | (119)           | Hex.19 | (90) | 4   |
| 65PNG-PLA | ø6.5 mm x ø10 mm   | 15       | (119)           | Hex.19 | (90) | 5.3 |
| 85PNG-PLA | ø8.5 mm x ø12.5 mm | 17       | (119)           | Hex.22 | (90) | 7   |

**Socket SH type (Hose barb)**

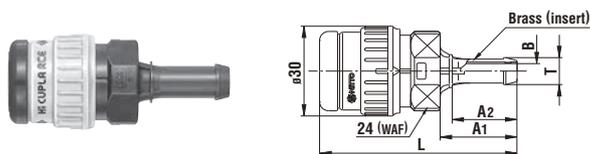


| Model   | Application (Hose) | Mass (g) | Dimensions (mm) |      |      |      |    |
|---------|--------------------|----------|-----------------|------|------|------|----|
|         |                    |          | L               | A1   | A2   | øT   | øB |
| HA-20SH | 1/4"               | 26       | (65.5)          | 25.5 | 21.5 | 9    | 5  |
| HA-30SH | 3/8"               | 28       | (68)            | 28   | 23.5 | 11.5 | 7  |

**Socket SM type (Male thread)**

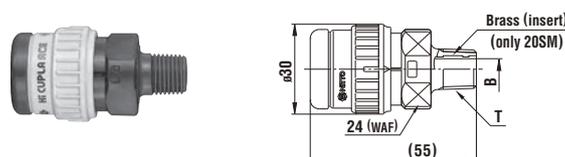


| Model   | Application | Mass (g) | Dimensions (mm) |     |
|---------|-------------|----------|-----------------|-----|
|         |             |          | T               | øB  |
| HA-20SM | Rc 1/4      | 27       | R 1/4           | 7.1 |
| HA-30SM | Rc 3/8      | 26       | R 3/8           | 8   |

**Socket SN type (For urethane hose connection)**

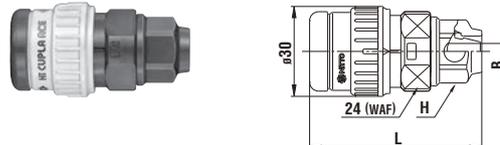


| Model   | Application (Hose) | Mass (g) | Dimensions (mm) |        |     |
|---------|--------------------|----------|-----------------|--------|-----|
|         |                    |          | L               | H(WAF) | øB  |
| HA-50SN | ø5 mm x ø8 mm      | 27       | (57)            | Hex.19 | 4   |
| HA-60SN | ø6 mm x ø9 mm      | 27       | (57)            | Hex.19 | 4.7 |
| HA-65SN | ø6.5 mm x ø10 mm   | 27       | (57)            | Hex.19 | 5.3 |
| HA-80SN | ø8 mm x ø12 mm     | 29       | (59.5)          | Hex.22 | 6.5 |
| HA-85SN | ø8.5 mm x ø12.5 mm | 29       | (59.5)          | Hex.22 | 7   |

**Socket T type (For two branch lines)**

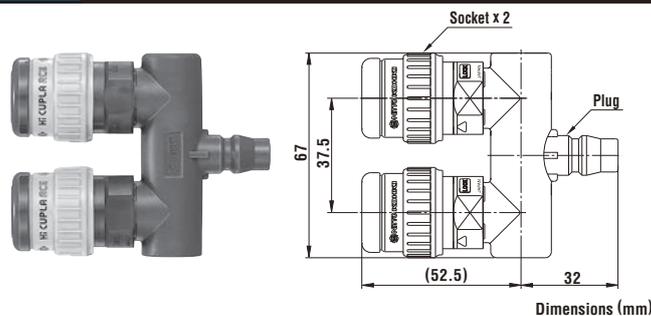

| Model | Inlet / Outlet       | Mass (g) |
|-------|----------------------|----------|
| HA-T  | 20P-PLA / HA-65S x 2 | 73       |

**Socket SNG type (For hose with hose guard nut connection)**

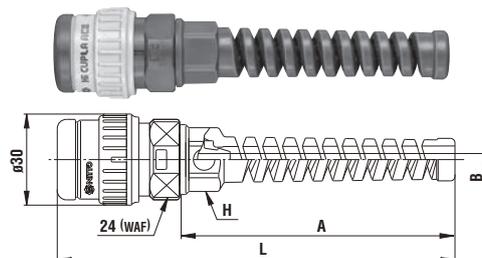

| Model    | Application (Hose) | Mass (g) | Dimensions (mm) |        |      |     |
|----------|--------------------|----------|-----------------|--------|------|-----|
|          |                    |          | L               | H(WAF) | A    | øB  |
| HA-50SNG | ø5 mm x ø8 mm      | 31       | (130)           | Hex.19 | (90) | 4   |
| HA-65SNG | ø6.5 mm x ø10 mm   | 33       | (130)           | Hex.19 | (90) | 5.3 |
| HA-85SNG | ø8.5 mm x ø12.5 mm | 35       | (130)           | Hex.22 | (90) | 7   |

For Low Pressure (Air)

# Rotary Plug

For pneumatic tools and devices

Working pressure



Valve structure





Applicable fluid




Newly developed rotary function allows 360° swivelling!  
Big improvement for handling of pneumatic tools!

- Rotary neck plug for hose connection to pneumatic tools and pneumatic devices.
- Fits at 45° angle to the tool eliminating annoying offset load caused by connected hose.
- Ideal compact design enables optimum workability by simple body structure. Now far lighter and smaller than conventional models.
- New dust-proof design for increased durability.
- For air tackers, nailers, impact wrenches and other pneumatic tools.

■ Comparison by appearance

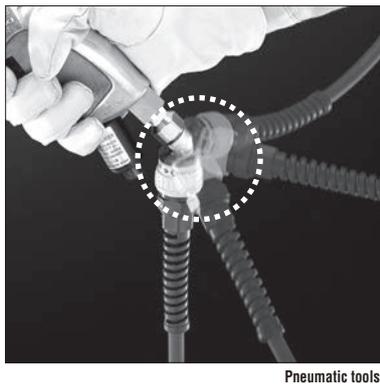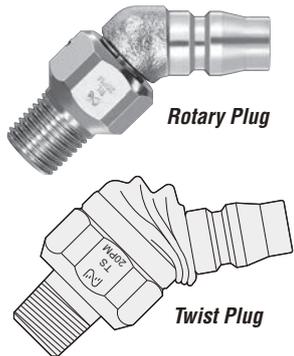

Pneumatic tools

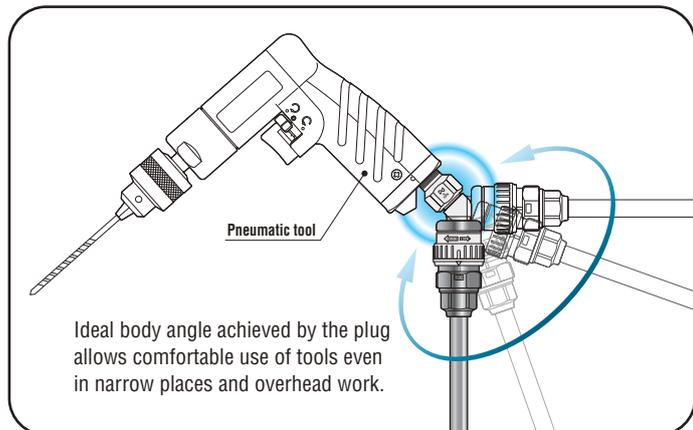

Ideal body angle achieved by the plug allows comfortable use of tools even in narrow places and overhead work.

| Specifications            |                       |      |          |   |
|---------------------------|-----------------------|------|----------|---|
| Body material             | Steel (Nickel-plated) |      |          |   |
| Size (Thread)             | 1/4", 3/8"            |      |          |   |
| Working pressure          | MPa                   | 1.5  |          |   |
|                           | kgf/cm <sup>2</sup>   | 15   |          |   |
|                           | bar                   | 15   |          |   |
|                           | PSI                   | 218  |          |   |
| Seal material             | Nitrile rubber        | Mark | NBR (SG) | Working temperature range: -20°C to +80°C<br>Remarks: Standard material |
| Working temperature range |                       |      |          |   |

| Max. Tightening Torque |          | Nm (kgf·cm) |
|------------------------|----------|-------------|
| Size (Thread)          | 1/4"     | 3/8"        |
| Torque                 | 14 [143] | 22 [224]    |

**Flow Direction**

Fluid may flow in either direction from plug or from socket side when coupled.

**Interchangeability**

Can be connected with sockets for Hi Cupla Models 10, 17, 20, 30, and 40. Interchangeable with each corresponding models of Hi Cupla Series and Nut Cupla Series.

**Models and Dimensions** WAF : WAF stands for width across flats.

**Plug PM type (Male thread)**

| Model   | Application | Mass (g) | Dimensions (mm) |        |       |
|---------|-------------|----------|-----------------|--------|-------|
|         |             |          | L               | D      | T     |
| RL-20PM | Rc 1/4      | 52       | (52.1)          | (34.1) | R 1/4 |
| RL-30PM | Rc 3/8      | 73       | (50.8)          | (32.8) | R 3/8 |

**Plug Model RL-20PFF type (Female thread)**

● Application : G 1/4  
● Mass : 57 g

Dimensions (mm)

# For Low Pressure (Air)

# Twist Plug

For pneumatic tools and devices

Working pressure



Valve structure




Applicable fluid



## Eliminates hose twisting, kinking, or bending! Greatly improves working efficiency!

- A plug with a free twisting neck for hose connections to pneumatic tools and devices.
- Free angle control (max. 70° flexible) provides comfortable job positions, even in narrow spaces or with overhead works.
- The flexible part is reinforced with self-lubricating plastics to give smooth bending action and excellent durability.
- Dust protector over the flexible part prevents dirt and swarf from entering.

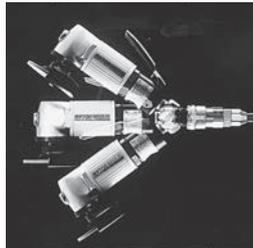


Pneumatic tools

### Models and Dimensions


WAF : WAF stands for width across flats.

#### Plug PM type (Male thread)

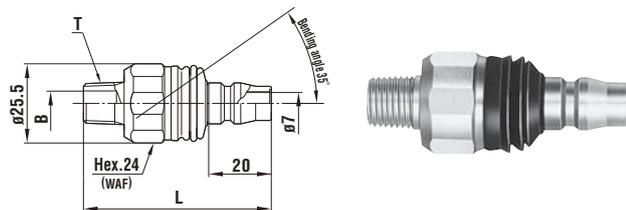

| Model   | Application | Mass (g) | Dimensions (mm) |    |       |
|---------|-------------|----------|-----------------|----|-------|
|         |             |          | L               | ØB | T     |
| TS-10PM | Rc 1/8      | 59       | (57.5)          | 4  | R 1/8 |
| TS-20PM | Rc 1/4      | 59       | (60)            | 8  | R 1/4 |
| TS-30PM | Rc 3/8      | 65       | (60)            | 10 | R 3/8 |

#### Plug Model TS-20PFF (Female thread)

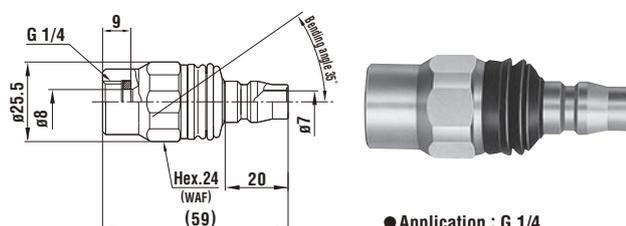

- Application : G 1/4
  - Mass : 77 g
- Dimensions (mm)

### Specifications

|                  |                       |      |          |                           |                |         |                   |
|------------------|-----------------------|------|----------|---------------------------|----------------|---------|-------------------|
| Body material    | Steel (Nickel-plated) |      |          |                           |                |         |                   |
| Size (Thread)    | 1/8", 1/4", 3/8"      |      |          |                           |                |         |                   |
| Working pressure | MPa                   | 1.0  |          |                           |                |         |                   |
|                  | kgf/cm <sup>2</sup>   | 10   |          |                           |                |         |                   |
|                  | bar                   | 10   |          |                           |                |         |                   |
|                  | PSI                   | 145  |          |                           |                |         |                   |
| Seal material    | Nitrile rubber        | Mark | NBR (SG) | Working temperature range | -20°C to +60°C | Remarks | Standard material |

### Tightening Torque Range

Nm (kgf·cm)

| Size (Thread) | 1/8"                | 1/4"                  | 3/8"                  |
|---------------|---------------------|-----------------------|-----------------------|
| Torque        | 8 to 10 (82 to 102) | 12 to 15 (122 to 153) | 22 to 25 (224 to 255) |

### Flow Direction

Fluid may flow in either direction from plug or from socket side.



### Interchangeability

Can be connected with socket for Hi Cupla Models 10, 17, 20, 30 and 40. Interchangeable with each corresponding models of Hi Cupla Series and Nut Cupla Series.

### Suitability for Vacuum

Not suitable for vacuum application in either connected or disconnected condition.

### Min. Cross-Sectional Area


(mm<sup>2</sup>)

| Model                     | TS-10PM | TS-20PM | TS-30PM | TS-20PFF |
|---------------------------|---------|---------|---------|----------|
| Min. cross-sectional area | 12.5    | 38.5    | 38.5    | 38.5     |

### Pressure - Flow Characteristics

[Test conditions] • Fluid : Air • Temperature : Room temperature

(S) is a state of straight.  
(B) is a state of bending.

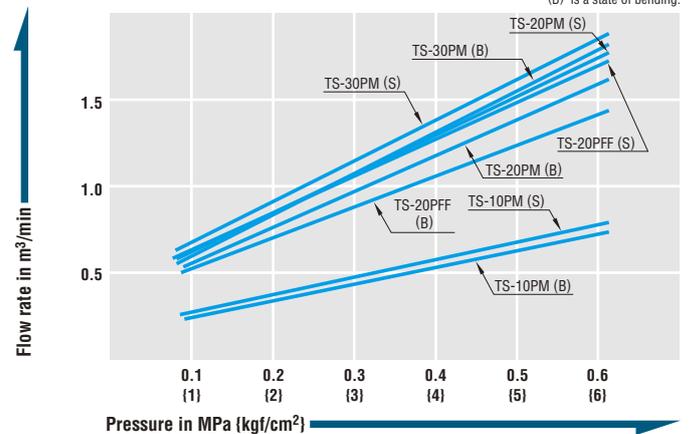

For Low Pressure (Air)

# Purge Plug


For air lines with purge mechanism

Working pressure **1.0** MPa (10 kgf/cm<sup>2</sup>)

Valve structure: Purge valve

Applicable fluid: Air

**Eliminates an unpleasant popping noise and a hose whip back motion when Cupla is disconnected.**

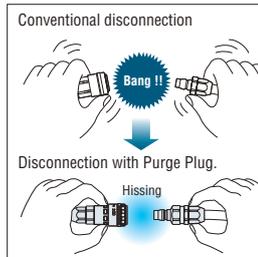

- When the Cupla is disconnected, the pressure left in the plug side hose is released gradually without an unpleasant popping noise and a hose whip back motion.
  - Unique design of air purge system enables the residual pressure release quickly and quietly.
  - A unique but simple purge valve design is good for long and repeated use.
  - The function is assured even under a high supply pressure or with a long hose.
- Note: This product is not a check valve to totally stop the air flow.



| Specifications            |  |      |          |                           |
|---------------------------|--|------|----------|---------------------------|
| Body material             | Steel (Chrome-plated)                            |      |          |                           |
| Size                      | 1/4", 3/8", 1/2" / ø6.5 x ø10, ø8.5 x ø12.5 hose |      |          |                           |
| Working pressure          | MPa  | 1.0  |          |                           |
|                           | kgf/cm <sup>2</sup>                              | 10   |          |                           |
|                           | bar  | 10   |          |                           |
|                           | PSI  | 145  |          |                           |
| Seal material             | Nitrile rubber                                   | Mark | NBR (SG) | Working temperature range |
| Working temperature range | -20°C to +60°C                                   |      |          |                           |
|                           |  |      |          | Remarks                   |
|                           | Standard material                                |      |          |                           |

| Tightening Torque Range |                     | Nm (kgf·cm) |
|-------------------------|---------------------|-------------|
| Torque                  | 9 to 11 (92 to 112) |             |

**Flow Direction**

Fluid must run from socket to plug.


**Interchangeability**

Can be connected with sockets for Hi Cupla Models 10, 17, 20, 30 and 40. Interchangeable with each corresponding models of Hi Cupla Series and Nut Cupla Series.

| Min. Cross-Sectional Area |         | (mm <sup>2</sup> ) |         |         |         |
|---------------------------|---------|--------------------|---------|---------|---------|
| Model                     | PV-20PH | PV-30PH            | PV-40PH | PV-65PN | PV-85PN |
| Min. cross-sectional area | 19.6    | 44.1               | 50.4    | 22.0    | 44.1    |

**Suitability for Vacuum**

Not suitable for vacuum application in either connected or disconnected condition.

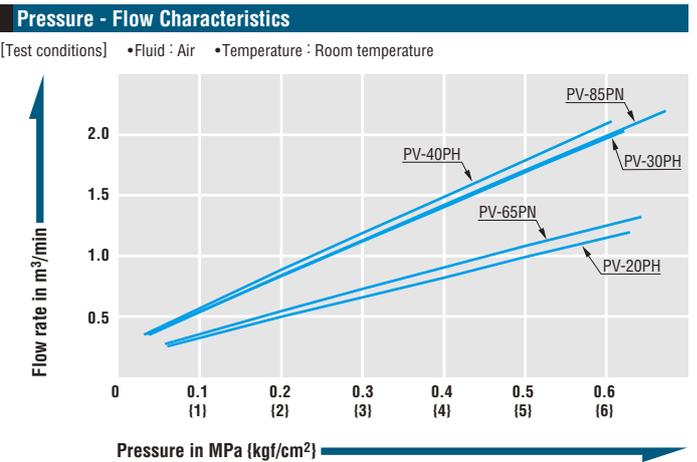

## Models and Dimensions

WAF : WAF stands for width across flats.

**Plug PH type (Hose barb)**

| Model   | Application (Hose) | Mass (g) | Dimensions (mm) |    |     |      |
|---------|--------------------|----------|-----------------|----|-----|------|
|         |                    |          | L               | A  | øB  | øT   |
| PV-20PH | 1/4"               | 59       | (70)            | 28 | 5   | 8.4  |
| PV-30PH | 3/8"               | 62       | (74)            | 32 | 7.5 | 11.3 |
| PV-40PH | 1/2"               | 76       | (77)            | 35 | 9   | 14.8 |

**Plug PN type (For urethane hose connection)**

| Model   | Application (Hose) | Mass (g) | Dimensions (mm) |    |     |        |
|---------|--------------------|----------|-----------------|----|-----|--------|
|         |                    |          | L               | A  | øB  | T(WAF) |
| PV-65PN | ø6.5 mm x ø10 mm   | 71       | (59)            | 17 | 5.3 | Hex.17 |
| PV-85PN | ø8.5 mm x ø12.5 mm | 78       | (61)            | 19 | 7.5 | Hex.19 |

For Low Pressure (Air)

# Anti-vibration Plug Hose

Plug hose for vibrating and percussive air tools

|   |   |  |
|---|---|--|
| Working pressure  | Valve structure   | Applicable fluid   |
| <br>1.5 MPa<br>(15 kgf/cm <sup>2</sup> ) | <br>One-way shut-off | <br>Air |


## Protects the Cupla from shocks generated by vibrating tools and impact tools.

- Optimizes life and prevents wear of “Cupla” by absorbing strong shocks generated by connected vibrating tools.
- Prevents hard-to-notice flow reduction caused by “Cupla” wear under continuous vibration.
- Flexible rubber hose allows free and wide range of tool motion.



**SHA-3-2R**  
R 1/4 male thread type

**SHA-3-3R**  
R 3/8 male thread type

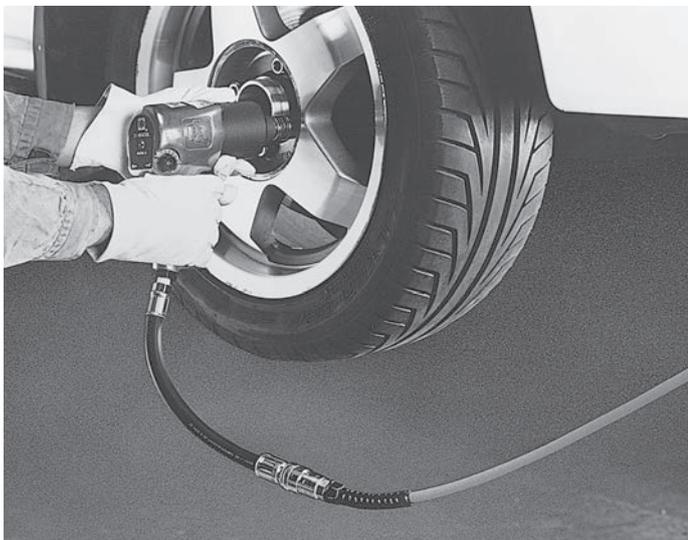

### Specifications


|                  |                     |          |
|------------------|---------------------|----------|
| Applicable fluid | Air                 |          |
| Model            | SHA-3-2R            | SHA-3-3R |
| Size (Thread)    | R 1/4"              | R 3/8"   |
| Inlet (Plug)     | Hi Cupla (30PH)     |          |
| Working pressure | MPa                 | 1.5      |
|                  | kgf/cm <sup>2</sup> | 15       |
|                  | bar                 | 15       |
|                  | PSI                 | 218      |
| Air hose         | Rubber hose for air |          |
| Overall length   | 320 mm              |          |
| Min. bend radius | 135 mm              |          |

### Interchangeability

Can be connected with sockets for Hi Cupla Models 10, 17, 20, 30 and 40. Interchangeable with each corresponding models of Hi Cupla Series and Nut Cupla Series.

### Application

Suitable for air tools such as impact wrenches used in car maintenance or metalworking industries, and tackers, nailers or concrete breakers in the construction industry, that commonly cause incessant vibrations.

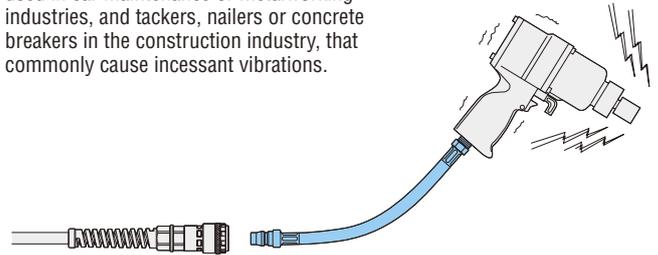

As an intermediate connection hose between “Cupla” and a vibrating air tool.

For Low Pressure (Air)

# Duster Cupla

Air line coupling with air blower function

Working pressure



Valve structure



Applicable fluid



## Three functions in one: connection, air blow, hose twist release ! Dust blow without detaching the tool !

- Hi Cupla comes with compact air blow function.
- Improves job efficiency by air blow with tool still connected to hose.
- Ball bearing swivel mechanism prevents hose twist and relieves tension on operator's hand.
- Special design of air blow button switch is free from in line air pressure - no hard press down required.
- Also simple is routine water drain from air line before starting daily work.

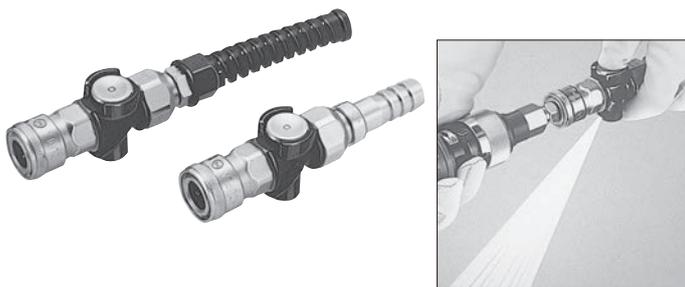


Photo shows simulated air flow.

### Specifications

|                  |  |      |          |                           |                |         |                   |
|------------------|--|------|----------|---------------------------|----------------|---------|-------------------|
| Body material    | Body: Aluminum, Cupla: Steel (Chrome-plated)         |      |          |                           |                |         |                   |
| Size             | For 1/4", 3/8", 1/2" hose                            |      |          |                           |                |         |                   |
|                  | For ø6.5 x ø10 mm, ø8.5 x ø12.5 mm polyurethane hose |      |          |                           |                |         |                   |
| Working pressure | MPa  | 1.0  |          |                           |                |         |                   |
|                  | kgf/cm <sup>2</sup>                                  | 10   |          |                           |                |         |                   |
|                  | bar  | 10   |          |                           |                |         |                   |
|                  | PSI  | 145  |          |                           |                |         |                   |
| Seal material    | Nitrile rubber                                       | Mark | NBR (SG) | Working temperature range | -20°C to +60°C | Remarks | Standard material |

### Tightening Torque Range

Nm (kgf-cm)

|        |                   |                   |
|--------|-------------------|-------------------|
| Model  | 65PNG             | 85PNG             |
| Torque | 5 to 6 (51 to 61) | 7 to 8 (71 to 82) |

### Flow Direction



### Interchangeability


Can be connected with plugs for Hi Cupla Models 10, 17, 20, 30 and 40. Interchangeable with each corresponding models of Hi Cupla Series and Nut Cupla Series.

### Suitability for Vacuum

Not suitable for vacuum application in either connected or disconnected condition.

### Pressure - Flow Characteristics


[Test conditions] • Fluid : Air • Temperature : Room temperature

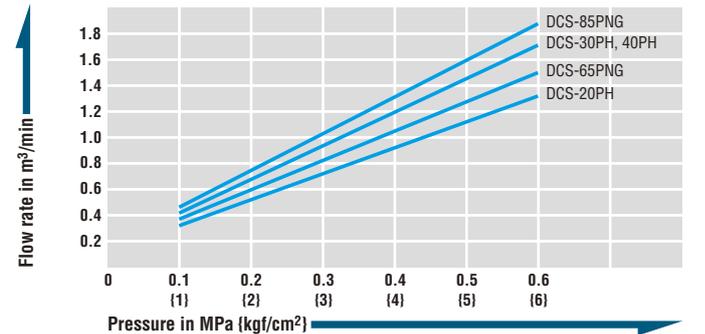

### Models and Dimensions


WAF : WAF stands for width across flats.

#### Socket PH type (Hose barb)

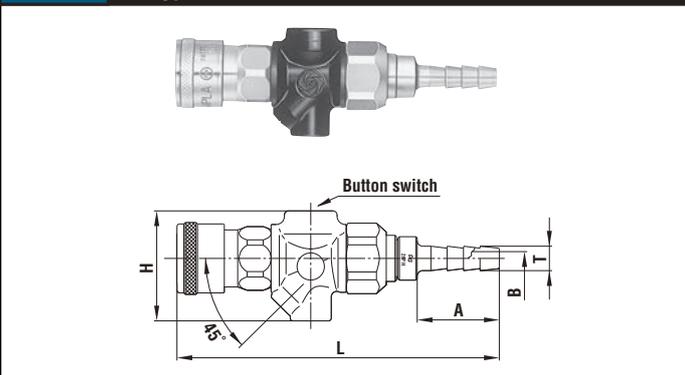

| Model    | Application (Hose) | Mass (g) | Dimensions (mm) |    |      |     |      |
|----------|--------------------|----------|-----------------|----|------|-----|------|
|          |                    |          | L               | A  | H    | øB  | øT   |
| DCS-20PH | 1/4"               | 168      | (117.9)         | 30 | 40.5 | 5.0 | 9.0  |
| DCS-30PH | 3/8"               | 171      | (121.9)         | 34 | 40.5 | 7.5 | 11.3 |
| DCS-40PH | 1/2"               | 193      | (123.9)         | 36 | 40.5 | 7.5 | 15   |

#### Socket PNG type (For hose with hose guard nut connection)

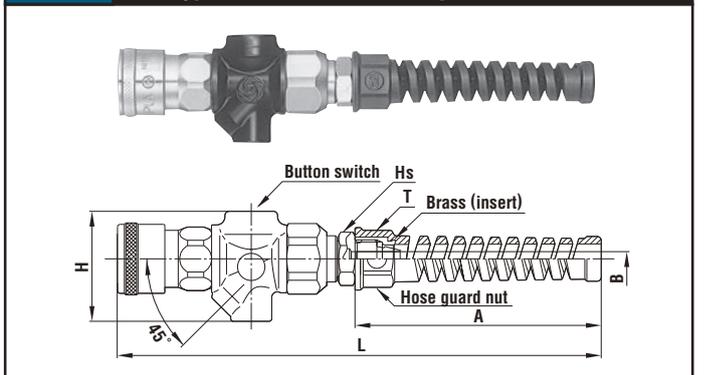


| Model     | Application (Hose) | Mass (g) | Dimensions (mm) |    |      |     |        |        |
|-----------|--------------------|----------|-----------------|----|------|-----|--------|--------|
|           |                    |          | L               | A  | H    | øB  | H(WAF) | T(WAF) |
| DCS-65PNG | ø6.5 mm x ø10 mm   | 176      | (176.9)         | 90 | 40.5 | 5.3 | Hex.17 | Hex.19 |
| DCS-85PNG | ø8.5 mm x ø12.5 mm | 185      | (176.9)         | 90 | 40.5 | 7.5 | Hex.19 | Hex.22 |

For Low Pressure (Air)

# NK Cupla Hose NK Cupla Coil Hose

Couplings with polyurethane hose for air lines

Working pressure



Valve structure



Applicable fluid



## Hi Cupla Ace sockets with polyurethane hoses are now standard stock items. Push-to-connect design for quick piping.

- The Hi Cupla Ace socket is mounted on pliable polyurethane hose featuring excellent durability and wear resistant with hose guard nut to prevent possible kinking.
- Plastic socket will cause minimum risk of damage even in contact with tools or equipment.
- Air flows in either direction from plug or from socket side when coupled.
- Spiral polyurethane coil hoses processed from straight tube have self-recoiling feature.

### Specifications

|                  |  |  |          |                           |               |         |                   |
|------------------|--|--|----------|---------------------------|---------------|---------|-------------------|
| Body material    | Socket : Engineering plastics (PBT, POM)<br>Plug : Steel (Chrome-plated) |  |          |                           |               |         |                   |
| Size             | ø5 mm x ø8 mm, ø6.5 mm x ø10 mm, ø8.5 mm x ø12.5 mm                      |  |          |                           |               |         |                   |
| Working pressure | MPa  | NK Cupla Hose : 1.0 / NK Cupla Coil Hose : 0.7 |          |                           |               |         |                   |
|                  | kgf/cm <sup>2</sup>  | NK Cupla Hose : 10 / NK Cupla Coil Hose : 7    |          |                           |               |         |                   |
|                  | bar  | NK Cupla Hose : 10 / NK Cupla Coil Hose : 7    |          |                           |               |         |                   |
|                  | PSI  | NK Cupla Hose : 145 / NK Cupla Coil Hose : 102 |          |                           |               |         |                   |
| Seal material    | Nitrile rubber   | Mark   | NBR (SG) | Working temperature range | -5°C to +60°C | Remarks | Standard material |


### Tightening Torque Range

Nm (kgf·cm)

|                 |                       |                       |                       |
|-----------------|-----------------------|-----------------------|-----------------------|
| Size            | ø5 mm x ø8 mm         | ø6.5 mm x ø10 mm      | ø8.5 mm x ø12.5 mm    |
| Torque (Socket) | 1.6 to 2.0 {16 to 20} | 1.6 to 2.0 {16 to 20} | 2.2 to 2.8 {22 to 29} |
| Torque (Plug)   | 5 to 6 {51 to 61}     | 5 to 6 {51 to 61}     | 7 to 8 {71 to 82}     |

### Flow Direction

Air flows in either direction from plug or from socket side when coupled.



### Interchangeability

Interchangeable with Hi Cupla Models 10, 17, 20, 30 and 40.  
Interchangeable with each corresponding Hi Cupla models.


### Suitability for Vacuum

Not suitable for vacuum application in either connected or disconnected condition.

### Models and Dimensions / Hose length

#### Plug / Socket


#### NK Cupla Hose

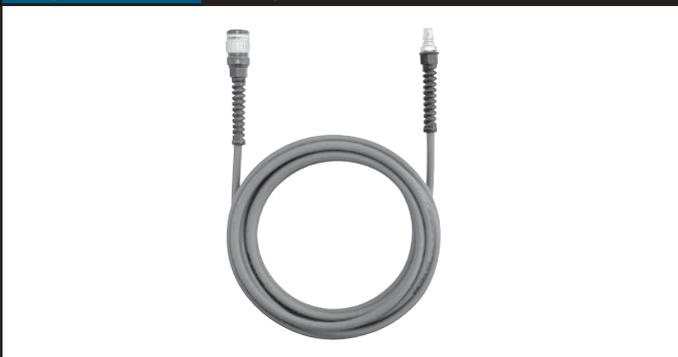

| Model    | Hose size          | Hose length | Socket       |           | Plug         |           |
|----------|--------------------|-------------|--------------|-----------|--------------|-----------|
|          |                    |             | Hi Cupla Ace | Nut Cupla | Hi Cupla Ace | Nut Cupla |
| NKU-605B | ø6.5 mm x ø10 mm   | 5 m         | HA-65SNG     |           | 65PNG        |           |
| NKU-610B | ø6.5 mm x ø10 mm   | 10 m        | HA-65SNG     |           | 65PNG        |           |
| NKU-620B | ø6.5 mm x ø10 mm   | 20 m        | HA-65SNG     |           | 65PNG        |           |
| NKU-810B | ø8.5 mm x ø12.5 mm | 10 m        | HA-85SNG     |           | 85PNG        |           |
| NKU-820B | ø8.5 mm x ø12.5 mm | 20 m        | HA-85SNG     |           | 85PNG        |           |

#### Plug / Socket

#### NK Cupla Coil Hose

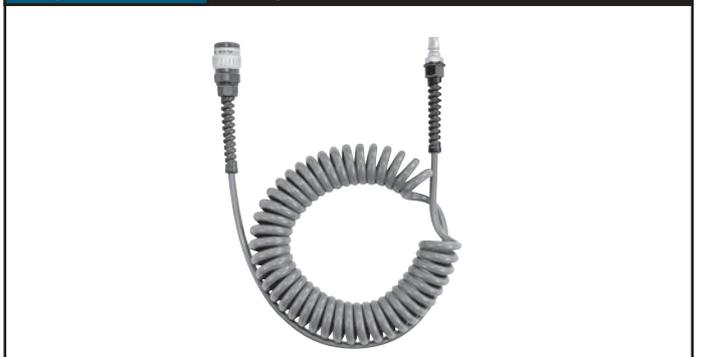

| Model    | Hose size        | Max. extensible length | Socket       |           | Plug         |           |
|----------|------------------|------------------------|--------------|-----------|--------------|-----------|
|          |                  |                        | Hi Cupla Ace | Nut Cupla | Hi Cupla Ace | Nut Cupla |
| NKC-503B | ø5 mm x ø8 mm    | 2 m                    | HA-50SNG     |           | 50PNG        |           |
| NKC-505B | ø5 mm x ø8 mm    | 4 m                    | HA-50SNG     |           | 50PNG        |           |
| NKC-603B | ø6.5 mm x ø10 mm | 2 m                    | HA-65SNG     |           | 65PNG        |           |
| NKC-605B | ø6.5 mm x ø10 mm | 4 m                    | HA-65SNG     |           | 65PNG        |           |

For Low Pressure


# Mini Cupla

Standard type for use on equipment for welding and gas cutting, etc.

|                                  |                        |                          |
|----------------------------------|------------------------|--------------------------|
| <b>Working pressure</b>          | <b>Valve structure</b> | <b>Applicable fluids</b> |
| 0.7 MPa (7 kgf/cm <sup>2</sup> ) | One-way shut-off       | Oxygen, Fuel Gas         |

## Exclusively for oxyacetylene equipment. Many variations with higher flow rates!

- From cylinders to torches, all piping connections associated with welding and cutting equipment are push-to-connect operations.
- Double-lip seal prevents minor leak during connection. Oxygen and fuel gas Cuplas have different sizes to prevent accidental interconnection.
- Pressure loss is minimized to achieve higher flow rate.
- Various types of end configurations have been standardized to comply with a wide range of welding and cutting equipment applications. Sockets themselves or plugs themselves are interchangeable with Mini Cupla Super's counterparts.
- Line Cupla Mini is also available for multiple piping.


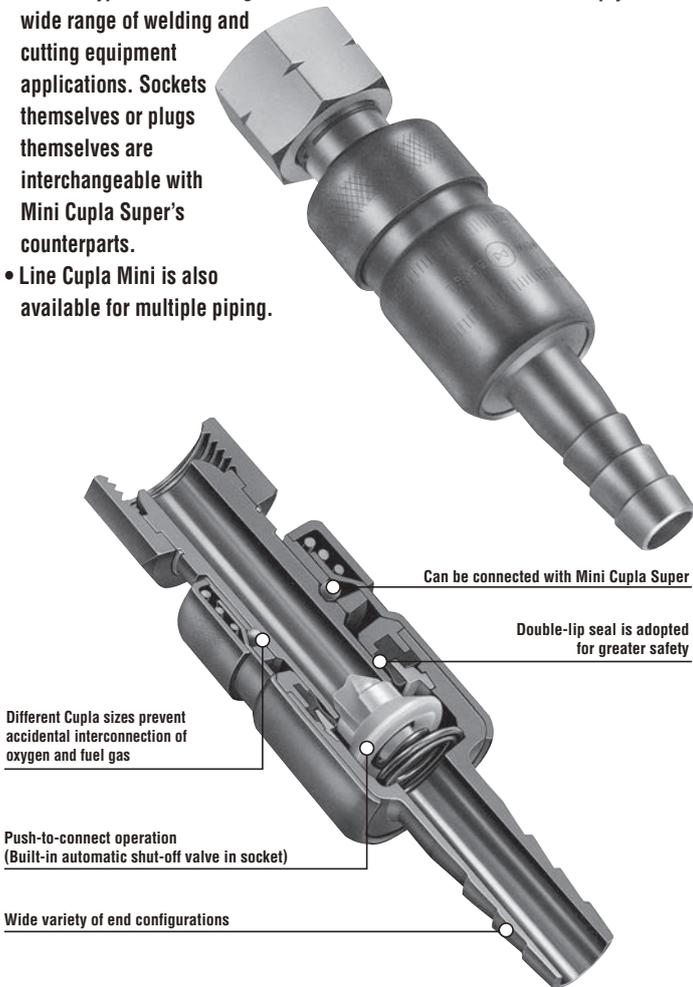


### Structure and Principle of Backflow Prevention

#### Plug with backflow stop valve

Plugs with backflow stop valve in Mini Cupla are designed exclusively for gas welding/cutting to prevent occurrence of gas mixing. Possible backflow of gas during operation can be stopped by cutting the back flow into the cylinder or line. Such valve is adopted in both fuel gas and oxygen plug.

Cross-section sketch showing the structure

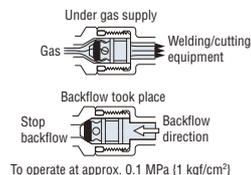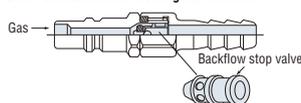

### Specifications

|                  |                     |                                  |          |                           |                |         |                   |
|------------------|---------------------|----------------------------------|----------|---------------------------|----------------|---------|-------------------|
| Body material    |                     | Brass                            |          |                           |                |         |                   |
| Size             | Thread              | 1/8", 1/4", 3/8" / M16, W12.5-20 |          |                           |                |         |                   |
|                  | Hose barb           | 1/4", 5/16", 3/8"                |          |                           |                |         |                   |
| Working pressure | MPa                 | 0.7                              |          |                           |                |         |                   |
|                  | kgf/cm <sup>2</sup> | 7                                |          |                           |                |         |                   |
|                  | bar                 | 7                                |          |                           |                |         |                   |
|                  | PSI                 | 102                              |          |                           |                |         |                   |
| Seal material    | Nitrile rubber      | Mark                             | NBR (SG) | Working temperature range | -20°C to +80°C | Remarks | Standard material |

### Max. Tightening Torque

Nm {kgf·cm}

|        |  |        |          |
|--------|--|--------|----------|
| Model  | 22PF, 22PFB, 22SF, 25PF, 33PF, 33PFB, 33SF | 22SM   | 33SM     |
| Torque | 12 {122}                                   | 9 {92} | 11 {112} |

### Flow Direction

Fluid must run from socket to plug.



### Interchangeability

To prevent accidental interconnection, no Cuplas for oxygen can be connected with those for fuel gas Cuplas. However, oxygen plugs and sockets are interchangeable regardless of end configurations and fuel gas plugs and sockets are interchangeable regardless of end configurations. Also Mini Cupla models for oxygen are interchangeable with Mini Cupla Super models for oxygen, while fuel gas models are interchangeable.

### Min. Cross-Sectional Area

(mm<sup>2</sup>)



|                           |            |            |
|---------------------------|------------|------------|
| Model                     | 22SP, 25SP | 33SP, 35SP |
| Min. cross-sectional area | 20         | 44         |

### Suitability for Vacuum


Not suitable for vacuum application in either connected or disconnected condition.

### Pressure - Flow Characteristics

[Test conditions] • Fluid : Air • Temperature : Room temperature

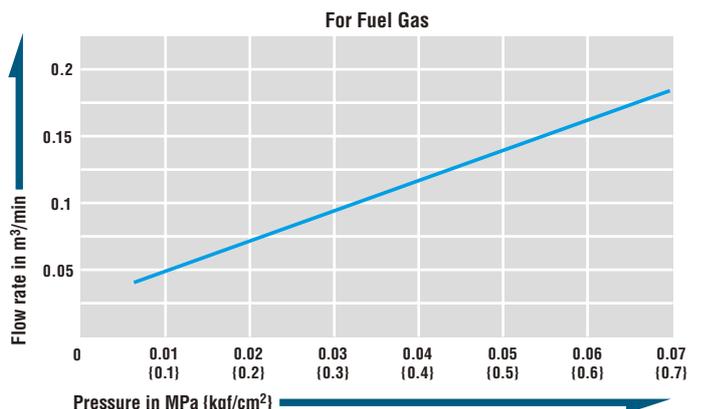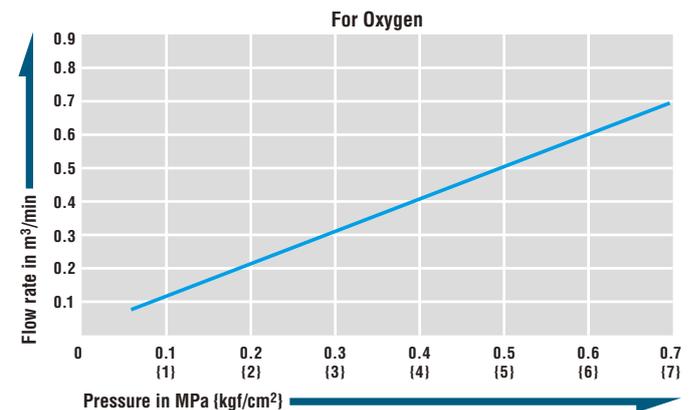


**Plug PH type (Hose barb)**

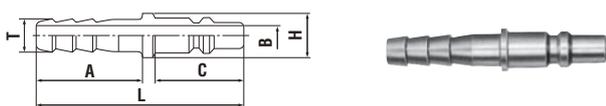


| Usage        | Model | Application (Hose) | Mass (g) | Dimensions (mm) |      |    |    |      |     |
|--------------|-------|--------------------|----------|-----------------|------|----|----|------|-----|
|              |       |                    |          | L               | C    | A  | øH | øT   | øB  |
| For Oxygen   | 22PH  | 1/4"               | 16       | 55              | 23.5 | 28 | 11 | 7.8  | 5   |
|              | 25PH  | 5/16"              | 19       |                 |      |    |    | 9    |     |
| For Fuel Gas | 33PH  | 3/8"               | 22       | 57              | 25.5 | 28 | 14 | 10.5 | 7.5 |
|              | 35PH  | 5/16"              | 20       |                 |      |    |    | 9    | 6   |

**Socket SH type (Hose barb)**

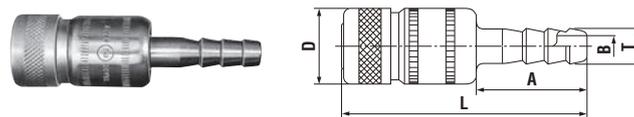


| Usage        | Model | Application (Hose) | Mass (g) | Dimensions (mm) |        |    |      |     |
|--------------|-------|--------------------|----------|-----------------|--------|----|------|-----|
|              |       |                    |          | L               | øD     | A  | øT   | øB  |
| For Oxygen   | 22SH  | 1/4"               | 52       | (64)            | (19.8) | 29 | 7.8  | 5   |
|              | 25SH  | 5/16"              | 55       |                 |        |    | 9    |     |
| For Fuel Gas | 33SH  | 3/8"               | 69       | (65)            | (22.6) | 29 | 10.5 | 7.5 |
|              | 35SH  | 5/16"              | 67       |                 |        |    | 9    | 6   |

**Plug PF type (Female thread for torch connection)**

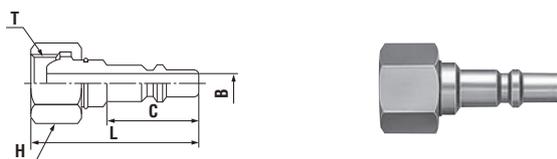


| Usage        | Model | Application             | Mass (g) | Dimensions (mm) |      |          |                          |     |
|--------------|-------|-------------------------|----------|-----------------|------|----------|--------------------------|-----|
|              |       |                         |          | L               | C    | H(WAF)   | T                        | øB  |
| For Oxygen   | 22PF  | For oxygen torch side   | 31       | (43)            | 23.5 | Hex.19   | M16x1.5                  | 5   |
|              | 22PFF |                         | 29       | (43.5)          |      | Hex.17   | G 1/4                    |     |
|              | 25PF  |                         | 26       |                 |      | W12.5-20 |                          |     |
| For Fuel Gas | 33PF  | For fuel gas torch side | 36       | (44.5)          | 25.5 | Hex.19   | M16x1.5 left-hand thread | 7.5 |

**Socket SF type (Female thread for cylinder connection)**

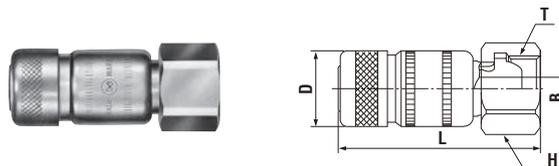


| Usage        | Model | Application             | Mass (g) | Dimensions (mm) |        |                          |    |        |
|--------------|-------|-------------------------|----------|-----------------|--------|--------------------------|----|--------|
|              |       |                         |          | L               | øD     | T                        | øB | H(WAF) |
| For Oxygen   | 22SF  | For oxygen gauge side   | 80       | (52)            | (19.8) | M16x1.5                  | 5  | Hex.19 |
| For Fuel Gas | 33SF  | For fuel gas gauge side | 96       | (54)            | (22.6) | M16x1.5 left-hand thread | 5  | Hex.19 |

**Plug PHB type (Hose barb with backflow stop valve)**

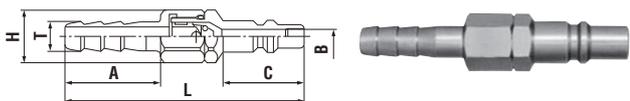


| Usage        | Model | Application (Hose) | Mass (g) | Dimensions (mm) |      |    |      |      |     |
|--------------|-------|--------------------|----------|-----------------|------|----|------|------|-----|
|              |       |                    |          | L               | C    | A  | øH   | øT   | øB  |
| For Oxygen   | 22PHB | 1/4"               | 31       | (69.6)          | 23.5 | 28 | 15.5 | 7.8  | 4.5 |
|              | 25PHB | 5/16"              | 34       |                 |      |    |      | 9    |     |
| For Fuel Gas | 33PHB | 3/8"               | 41       | (70.6)          | 25.5 | 28 | 15.5 | 10.5 | 4.5 |
|              | 35PHB | 5/16"              | 39       |                 |      |    |      | 9    |     |

**Socket SM type (Male thread)**

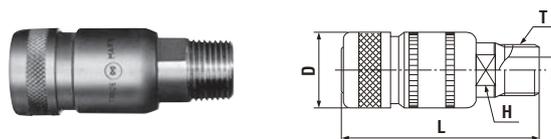

| Usage        | Model | Application | Mass (g) | Dimensions (mm) |        |        |       |     |
|--------------|-------|-------------|----------|-----------------|--------|--------|-------|-----|
|              |       |             |          | L               | øD     | H(WAF) | T     | øB  |
| For Oxygen   | 22SM  | Rc 1/4      | 51       | (52)            | (19.8) | 12     | R 1/4 | 7.5 |
| For Fuel Gas | 33SM  | Rc 3/8      | 77       | (55)            | (22.6) | 14     | R 3/8 | 10  |

**Plug PFB type (Female thread with backflow stop valve for torch connection)**

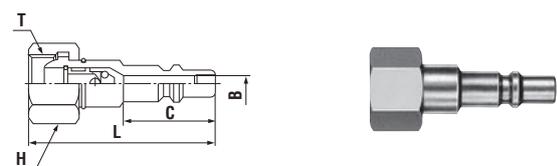

| Usage        | Model | Application             | Mass (g) | Dimensions (mm) |      |        |                          |     |
|--------------|-------|-------------------------|----------|-----------------|------|--------|--------------------------|-----|
|              |       |                         |          | L               | C    | H(WAF) | T                        | øB  |
| For Oxygen   | 22PFB | For oxygen torch side   | 36       | (48.5)          | 23.5 | Hex.19 | M16x1.5                  | 4.5 |
| For Fuel Gas | 33PFB | For fuel gas torch side | 41       | (49)            | 25.5 | Hex.19 | M16x1.5 left-hand thread | 4.5 |


**Plug PMT type (Male thread)**



| Usage      | Model | Application | Mass (g) | Dimensions (mm) |    |        |       |    |
|------------|-------|-------------|----------|-----------------|----|--------|-------|----|
|            |       |             |          | L               | C  | H(WAF) | T     | øB |
| For Oxygen | 21PMT | Rc 1/8      | 22       | 43.5            | 24 | Hex.14 | R 1/8 | 5  |
|            | 22PMT | Rc 1/4      | 27       | 45              | 24 | Hex.14 | R 1/4 | 5  |

**Socket Line Cupla Mini LM-32 (For three port branch piping)**

Mass : 4,300 g  
 • Dust caps come with the product as standard.

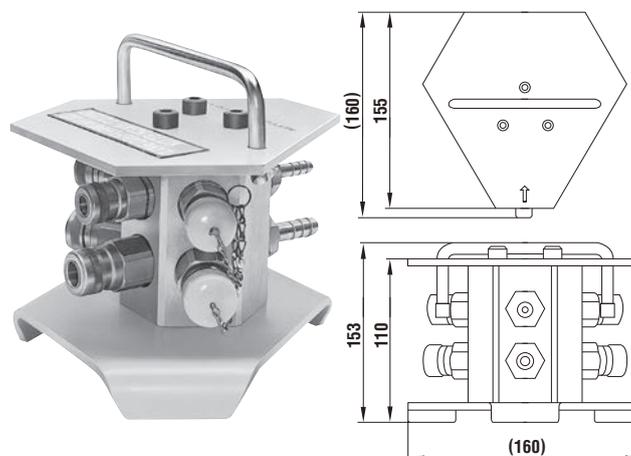

| Dimensions (mm)                             |            |              |            |
|---|------------|--------------|------------|
| Line Cupla Mini contains:                   | For Oxygen | For Fuel Gas | Qty        |
| Supply port                                 | 1/4"       | 3/8"         | Each 1 pc. |
| Gas outlets                                 | 22SM       | 33SM         | Each 3 pc. |
| Accessories (Plug with backflow stop valve) | 22PHB      | 33PHB        | Each 3 pc. |

For Low Pressure


# Mini Cupla Super

Heavy-duty push-to-connect type for oxyacetylene piping

|  |  |  |
|--|--|--|
| <p>Working pressure</p>  <p>0.7 MPa<br/>(7 kgf/cm<sup>2</sup>)</p> | <p>Valve structure</p>  <p>One-way shut-off</p> | <p>Applicable fluids</p>  <p>Oxygen, Fuel Gas</p> |
|--|--|--|

## Exclusively for welding and cutting equipment.

- From cylinders to torches, all piping connections associated with welding and cutting equipment are push-to-connect operations.
- Chrome-plated body for better corrosion resistance.
- Heat-treated plugs for better durability.
- Oxygen and fuel gas Cuplas have different configuration sizes with sleeves in different appearances, chrome plating for oxygen and copper plating for fuel gas, to prevent accidental interconnection.
- Smaller diameter design enables wider range of applications.
- Various types of end configurations have been standardized to comply with a wide range of welding and cutting equipment applications. Sockets themselves or plugs themselves are interchangeable with Mini Cupla's counterparts.


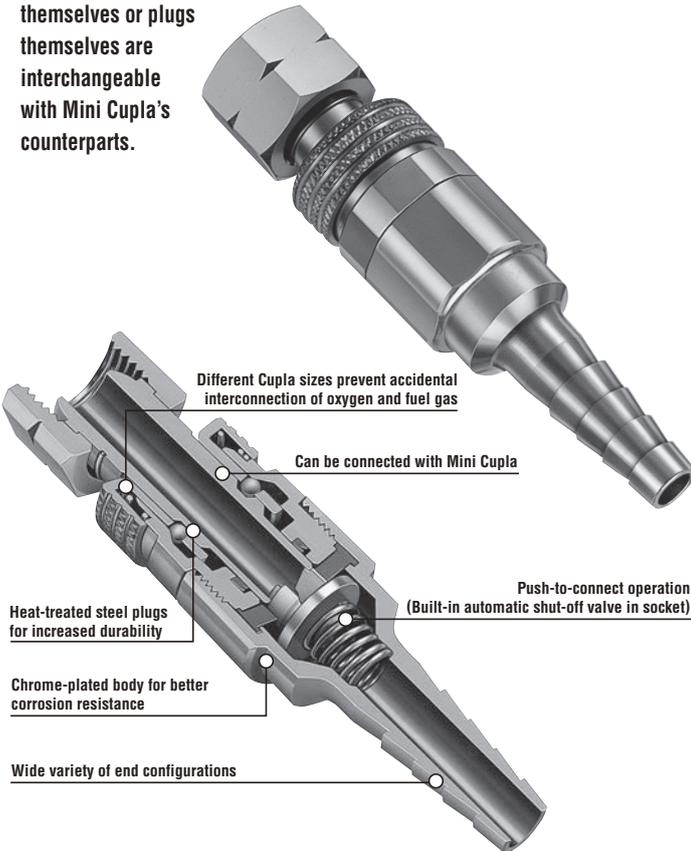


### Structure and Principle of Backflow Prevention

#### Plug with backflow stop valve

Plugs with backflow stop valve in Mini Cupla Super are designed exclusively for gas welding/cutting to prevent occurrence of gas mixing. Possible backflow of gas during operation can be stopped by cutting the back flow into the cylinder or line. Such valve is adopted in both fuel gas and oxygen plug.

Cross-section sketch showing the structure

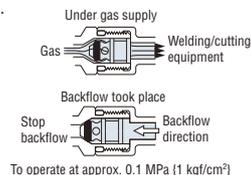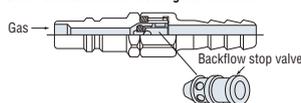

### Specifications

|                  |                     |   |          |                           |                |         |                   |
|------------------|---------------------|---|----------|---------------------------|----------------|---------|-------------------|
| Body material    |                     | Socket : Brass (Chrome-plated) Plug : Steel (Chrome-plated) |          |                           |                |         |                   |
| Size             | Thread              | 1/4", 3/8", M16   |          |                           |                |         |                   |
|                  | Hose barb           | 1/4", 5/16", 3/8" / 5 mm ID                                 |          |                           |                |         |                   |
| Working pressure | MPa                 | 0.7   |          |                           |                |         |                   |
|                  | kgf/cm <sup>2</sup> | 7   |          |                           |                |         |                   |
|                  | bar                 | 7   |          |                           |                |         |                   |
|                  | PSI                 | 102   |          |                           |                |         |                   |
| Seal material    | Nitrile rubber      | Mark  | NBR (SG) | Working temperature range | -20°C to +80°C | Remarks | Standard material |

### Max. Tightening Torque

Nm {kgf·cm}

| Model  | S22PF, S22SF, S33PF, S33SF | S22SM  | S33SM    |
|--------|----------------------------|--------|----------|
| Torque | 12 {122}                   | 9 {92} | 11 {112} |

### Flow Direction

Fluid must run from socket to plug.



### Interchangeability

To prevent accidental interconnection, no Cuplas for oxygen can be connected with those for fuel gas Cuplas. However, oxygen plugs and sockets are interchangeable regardless of end configurations and fuel gas plugs and sockets are interchangeable regardless of end configurations. Also Mini Cupla Super models for oxygen are interchangeable with Mini Cupla models for oxygen, while fuel gas models are interchangeable.

### Min. Cross-Sectional Area

(mm<sup>2</sup>)



| Model                     | S22SP | S33SP |
|---------------------------|-------|-------|
| Min. cross-sectional area | 16    | 28    |

### Suitability for Vacuum

Not suitable for vacuum application in either connected or disconnected condition.


### Pressure - Flow Characteristics

[Test conditions] • Fluid : Air • Temperature : Room temperature

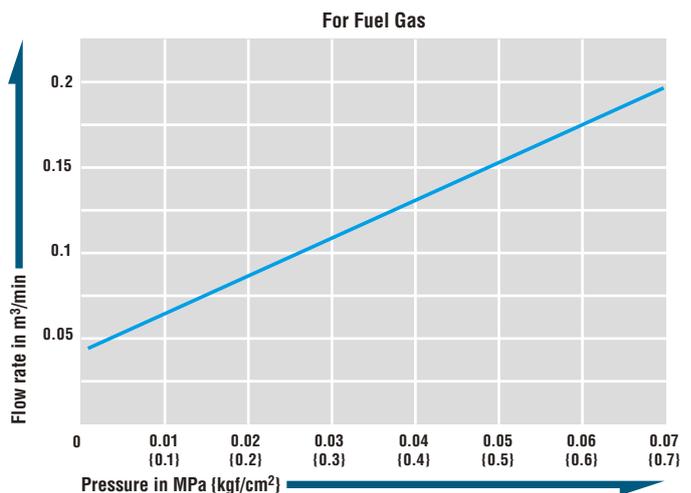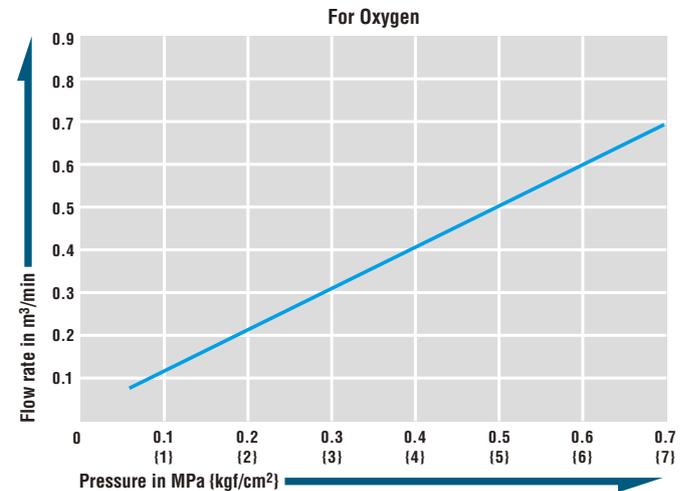


Models and Dimensions

**Plug PH type (Hose barb)**

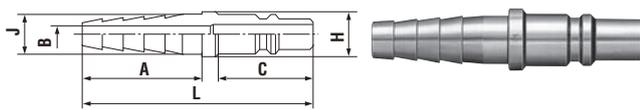


| Usage        | Model    | Application (Hose) | Mass (g) | Dimensions (mm) |      |    |    |     |     |
|--------------|----------|--------------------|----------|-----------------|------|----|----|-----|-----|
|              |          |                    |          | L               | C    | A  | øH | øJ  | øB  |
| For Oxygen   | S22PH    | 1/4", 5/16"        | 17       | 58              | 23.5 | 30 | 11 | 9.5 | 4.5 |
| For Oxygen   | S225PH   | 5 mm ID            | 12       | 49              | 23.5 | 21 | 11 | 6.2 | 3.1 |
| For Fuel Gas | S33PH    | 5/16", 3/8"        | 22       | 59.5            | 25.5 | 30 | 14 | 11  | 6   |
| For Fuel Gas | S335PH   | 5 mm ID            | 15       | 50.5            | 25.5 | 21 | 14 | 6.2 | 3.1 |
| For Fuel Gas | S32PH *1 | 1/4", 5/16"        | 20       | 59.5            | 25.5 | 30 | 14 | 9   | 4.5 |

**Plug PF type (Female thread for torch connection)**

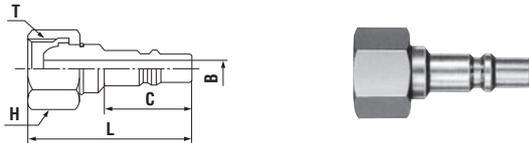


| Usage        | Model | Application             | Mass (g) | Dimensions (mm) |      |        |                             |     |
|--------------|-------|-------------------------|----------|-----------------|------|--------|-----------------------------|-----|
|              |       |                         |          | L               | C    | H(WAF) | T                           | øB  |
| For Oxygen   | S22PF | For oxygen torch side   | 35       | (43)            | 23.5 | Hex.19 | M16x1.5                     | 5   |
| For Fuel Gas | S33PF | For fuel gas torch side | 32       | (44.5)          | 25.5 | Hex.19 | M16x1.5<br>left-hand thread | 7.5 |

**Plug PFB type (Female thread with backflow stop valve for torch connection)**

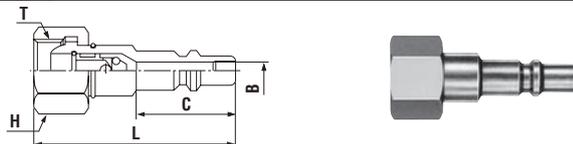

| Usage        | Model       | Application             | Mass (g) | Dimensions (mm) |      |        |                            |     |
|--------------|-------------|-------------------------|----------|-----------------|------|--------|----------------------------|-----|
|              |             |                         |          | L               | C    | H(WAF) | øT                         | øB  |
| For Oxygen   | S23PFB-2 *1 | For oxygen torch side   | 48       | (51)            | 23.5 | Hex.21 | BS 3/8                     | 4.5 |
| For Fuel Gas | S33PFB-2 *1 | For fuel gas torch side | 52       | (51)            | 25.5 | Hex.21 | BS 3/8<br>left-hand thread | 4.5 |

**Plug PN type (Nut type for small diameter hose)**

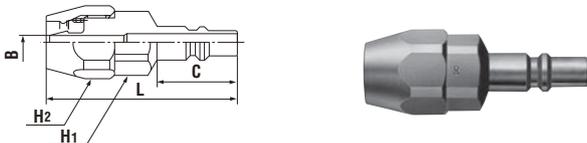


| Usage        | Model | Application (Hose) | Mass (g) | Dimensions (mm) |      |         |         |     |
|--------------|-------|--------------------|----------|-----------------|------|---------|---------|-----|
|              |       |                    |          | L               | C    | H1(WAF) | H2(WAF) | øB  |
| For Oxygen   | S22PN | 5 mm ID *2         | 54       | (53.5)          | 23.5 | Hex.17  | Hex.19  | 4.5 |
| For Fuel Gas | S33PN | 5 mm ID *2         | 57       | (54.5)          | 25.5 | Hex.17  | Hex.19  | 4.5 |

Application Example




**Socket SH type (Hose barb)**

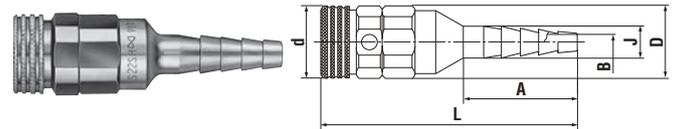


| Usage        | Model    | Application (Hose) | Mass (g) | Dimensions (mm) |        |    |    |     |     |
|--------------|----------|--------------------|----------|-----------------|--------|----|----|-----|-----|
|              |          |                    |          | L               | ød     | øD | A  | øJ  | øB  |
| For Oxygen   | S22SH    | 1/4", 5/16"        | 50       | (64.5)          | (19.5) | 20 | 30 | 9.5 | 4.5 |
| For Oxygen   | S225SH   | 5 mm ID            | 54       | (62.5)          | (19.5) | 20 | 21 | 6.2 | 3.1 |
| For Fuel Gas | S33SH    | 5/16", 3/8"        | 73       | (68)            | (22)   | 22 | 30 | 11  | 6   |
| For Fuel Gas | S335SH   | 5 mm ID            | 65       | (63)            | (22)   | 22 | 21 | 6.2 | 3.1 |
| For Fuel Gas | S32SH *1 | 1/4", 5/16"        | 74       | (72.5)          | (22)   | 22 | 30 | 9   | 4.5 |

**Socket SF type (Female thread for cylinder connection)**

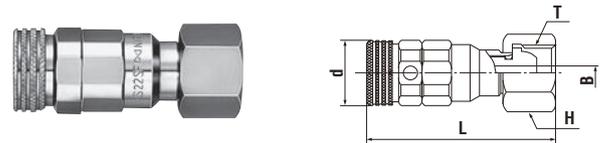


| Usage        | Model       | Application             | Mass (g) | Dimensions (mm) |        |                             |        |     |
|--------------|-------------|-------------------------|----------|-----------------|--------|-----------------------------|--------|-----|
|              |             |                         |          | L               | ød     | T                           | H(WAF) | øB  |
| For Oxygen   | S22SF       | For oxygen torch side   | 74       | (52.5)          | (19.5) | M16x1.5                     | Hex.19 | 4.5 |
| For Fuel Gas | S33SF       | For fuel gas torch side | 97       | (57.5)          | (22)   | M16x1.5<br>left-hand thread | Hex.19 | 6   |
| For Oxygen   | S23SF-BS *1 | For oxygen torch side   | 82       | (55.5)          | (19.5) | BS 3/8                      | Hex.21 | 4.5 |
| For Fuel Gas | S33SF-BS *1 | For fuel gas torch side | 88       | (59)            | (22)   | BS 3/8<br>left-hand thread  | Hex.21 | 6   |

**Socket SM type (Male thread)**

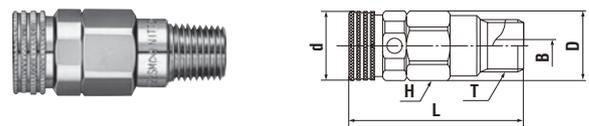

| Usage        | Model | Application | Mass (g) | Dimensions (mm) |        |    |        |       |     |
|--------------|-------|-------------|----------|-----------------|--------|----|--------|-------|-----|
|              |       |             |          | L               | ød     | øD | H(WAF) | T     | øB  |
| For Oxygen   | S22SM | Rc 1/4      | 58       | (48.5)          | (19.5) | 20 | Hex.18 | R 1/4 | 4.5 |
| For Fuel Gas | S33SM | Rc 3/8      | 85       | (52)            | (22)   | 23 | Hex.21 | R 3/8 | 6   |

**Socket SN type (Nut type for small diameter hose)**

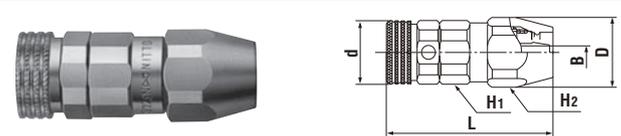

| Usage        | Model | Application (Hose) | Mass (g) | Dimensions (mm) |        |      |         |         |     |
|--------------|-------|--------------------|----------|-----------------|--------|------|---------|---------|-----|
|              |       |                    |          | L               | ød     | øD   | H1(WAF) | H2(WAF) | øB  |
| For Oxygen   | S22SN | 5 mm ID *2         | 74       | (52)            | (19.5) | 20.5 | Hex.18  | Hex.19  | 4.5 |
| For Fuel Gas | S33SN | 5 mm ID *2         | 91       | (57)            | (22)   | 20.5 | Hex.21  | Hex.19  | 4.5 |

\*1 : Made-to-order item.

\*2 : Available hose sizes are ø5 mm x ø11.2 mm, ø5 mm x ø11.5 mm and ø5 mm x ø11.8 mm.

Select the combination in accordance with your own application.

| Male thread                      | For regulator                    | For extension hose               | For torch                        |
|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
|                                  |                                  |                                  |                                  |
| Suggested combination<br>SM x PH | Suggested combination<br>SF x PH | Suggested combination<br>SH x PH | Suggested combination<br>SH x PF |

For Low Pressure


# Mold Cupla

General purpose and mold coolant port coupling

|   |   |   |
|---|---|---|
| <b>Working pressure</b><br><br>1.0 MPa<br>(10 kgf/cm <sup>2</sup> ) | <b>Valve structure</b><br><br>One-way shut-off | <b>Applicable fluids</b><br> Water<br> Heated oil |
| <br>Straight through   |   |   |

**Designed for quick replacement for die and mold !**  
**Rust resistant models having many variations.**

- Space saving design for molds with closely spaced coolant ports.
- Long sleeve socket facilitates connection/disconnection with plug embedded in mold.
- Enables quick mold cooling water line connection/disconnection.
- Various sizes and end configurations to suit a wide variety of mold applications.
- Can be connected with Super Cuplas, excluding K3 and K4 types.
- Push-to-connect design. (Built-in automatic shut-off valve in the socket)  
Also available is Cupla without valve (Please specify in ordering).
- Cupla for braided hose connection requires no hose clamp. (Model K-90SN)

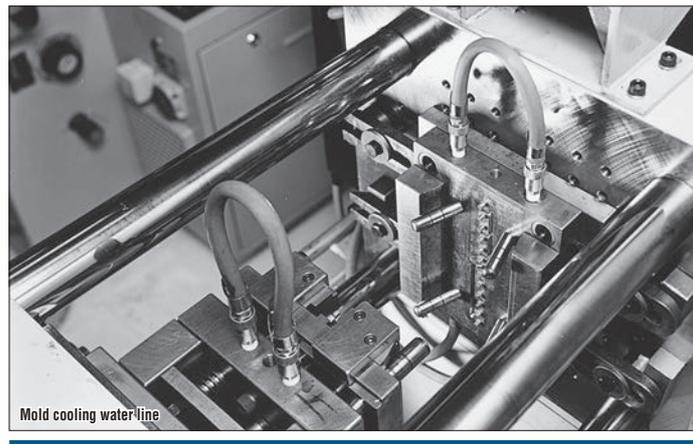

| Specifications          |                     |   |                           |                      |
|-------------------------|---------------------|---|---------------------------|----------------------|
| Body material           |                     | Brass                                     |                           |                      |
| Size                    | Thread              | 1/8", 1/4", 3/8"                          |                           |                      |
|                         | Hose barb           | Hose: 1/4", 3/8" / Braided hose: ø9 x ø15 |                           |                      |
| Working pressure        | MPa                 | 1.0                                       |                           |                      |
|                         | kgf/cm <sup>2</sup> | 10  |                           |                      |
|                         | bar                 | 10  |                           |                      |
|                         | PSI                 | 145                                       |                           |                      |
| Seal material           | Seal material       | Mark                                      | Working temperature range | Remarks              |
| Working temperature ran | Nitrile rubber      | NBR (SG)                                  | -20°C to +80°C            | Standard material    |
|                         | Fluoro rubber       | FKM (X-100)                               | -20°C to +180°C           | Available on request |

Working pressure and working temperature of Cupla for braided hoses depend upon the specifications of braided hoses to be used.

| Max. Tightening Torque |  | Nm {kgf·cm} |        |          |
|------------------------|--|-------------|--------|----------|
| Size (Thread)          |  | 1/8"        | 1/4"   | 3/8"     |
| Torque                 |  | 5 (51)      | 9 (92) | 11 (112) |

Tighten the nut until it is flush against the hose barb base after pushing a braided hose to the end.

**Flow Direction**

Fluid may flow in either direction from plug or from socket side when coupled.



**Interchangeability**

Sockets and plugs can be connected regardless of end configurations and sizes. K01, K-02, and K-03 series are not interchangeable with high flow type K3 and K4 series. Can be connected to Super Cupla.

| Min. Cross-Sectional Area |        | (mm <sup>2</sup> ) |        |        |        |        |         |         |        |
|---------------------------|--------|--------------------|--------|--------|--------|--------|---------|---------|--------|
| Plug                      | Socket | K-02SH             | K-03SH | K-02SM | K-03SM | K-02SF | K-02SHL | K-03SHL | K-90SN |
| K-02PH                    |        | 15.5               | 15.5   | 15.5   | 15.5   | 15.5   | 15.5    | 15.5    | 15.5   |
| K-03PH                    |        | 19                 | 28     | 28     | 28     | 28     | 15.5    | 28      | 28     |
| K-01PM                    |        | 19                 | 23     | 23     | 23     | 23     | 15.5    | 23      | 23     |
| K-01PM-HH                 |        | 19                 | 23     | 23     | 23     | 23     | 15.5    | 23      | 23     |
| K-02PM                    |        | 19                 | 28     | 28     | 28     | 28     | 15.5    | 28      | 28     |
| K-02PM-HH                 |        | 19                 | 23     | 23     | 23     | 23     | 15.5    | 23      | 23     |
| K-03PM                    |        | 19                 | 28     | 28     | 28     | 28     | 15.5    | 28      | 28     |
| K-01PF                    |        | 19                 | 28     | 28     | 28     | 28     | 15.5    | 28      | 28     |
| K-02PF                    |        | 19                 | 28     | 28     | 28     | 28     | 15.5    | 28      | 28     |
| K-03PF                    |        | 19                 | 28     | 28     | 28     | 28     | 15.5    | 28      | 28     |
| K-01PML                   |        | 19                 | 19     | 19     | 19     | 19     | 15.5    | 19      | 19     |
| K-02PML                   |        | 19                 | 28     | 28     | 28     | 28     | 15.5    | 28      | 28     |
| K-03PML                   |        | 19                 | 28     | 28     | 28     | 28     | 15.5    | 28      | 28     |


**Suitability for Vacuum**

Not suitable for vacuum application in either connected or disconnected condition.

| Plug Embedment Dimensions |            | (mm)   |    |   |  | Remarks |
|---------------------------|------------|--------|----|---|--|---------|
| Model                     | D*         | C*     | L  |   |  |         |
| K-01PM                    | 20 or more | 0 to 3 | 28 | * Socket interference prevents connection/disconnection when C exceeds 3 mm.                                    |  |         |
| K-01PM-HH                 | 20 or more | 0 to 3 | 24 |   |  |         |
| K-02PM                    | 20 or more | 0 to 3 | 29 | * Size D should be bigger than the outer diameter of the socket wrench to be used. (See JISB4636-1, JISB4636-2) |  |         |
| K-02PM-HH                 | 20 or more | 0 to 3 | 24 |   |  |         |
| K-03PM                    | 20 or more | 0 to 3 | 30 |   |  |         |


**Flow Rate – Pressure Loss Characteristics**

[Test conditions] • Fluid : Water • Temperature : Room temperature

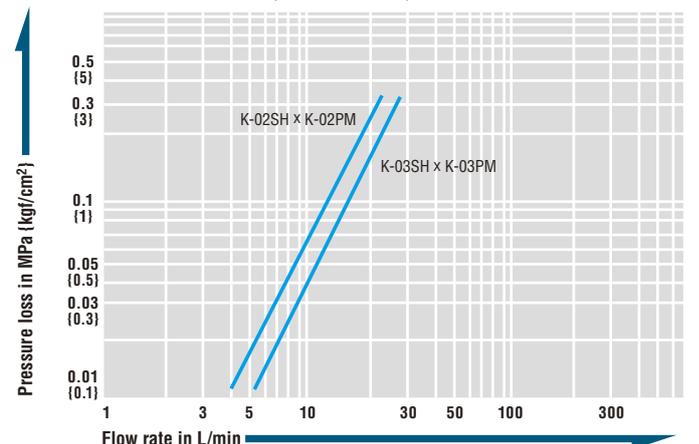


Models and Dimensions

**Plug PH type (Hose barb)**

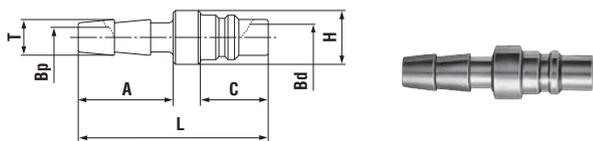


| Model  | Application (Hose) | Mass (g) | Dimensions (mm) |    |    |    |    |     |     |
|--------|--------------------|----------|-----------------|----|----|----|----|-----|-----|
|        |                    |          | L               | A  | C  | øH | øT | øBp | øBd |
| K-02PH | 1/4"               | 17       | 42              | 21 | 15 | 12 | 8  | 4.5 | 6   |
| K-03PH | 3/8"               | 19       | 42              | 21 | 15 | 15 | 12 | 7   | 6   |

**Plug PM type (Male thread)**

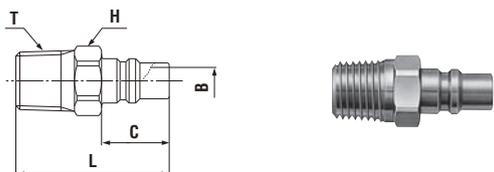


| Model  | Application | Mass (g) | Dimensions (mm) |        |    |       |     |
|--------|-------------|----------|-----------------|--------|----|-------|-----|
|        |             |          | L               | H(WAF) | C  | T     | øB  |
| K-01PM | Rc 1/8      | 14       | 31              | Hex.12 | 15 | R 1/8 | 5.5 |
| K-02PM | Rc 1/4      | 20       | 34              | Hex.14 | 15 | R 1/4 | 6   |
| K-03PM | Rc 3/8      | 35       | 35              | Hex.17 | 15 | R 3/8 | 6   |

**Plug PF type (Female thread)**

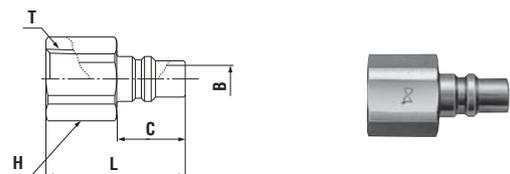


| Model  | Application | Mass (g) | Dimensions (mm) |        |    |        |    |
|--------|-------------|----------|-----------------|--------|----|--------|----|
|        |             |          | L               | H(WAF) | C  | T      | øB |
| K-01PF | R 1/8       | 16       | 28              | Hex.14 | 15 | Rc 1/8 | 6  |
| K-02PF | R 1/4       | 22       | 30.5            | Hex.17 | 15 | Rc 1/4 | 6  |
| K-03PF | R 3/8       | 35       | 32              | Hex.21 | 15 | Rc 3/8 | 6  |

**Plug PML type (Male thread)**

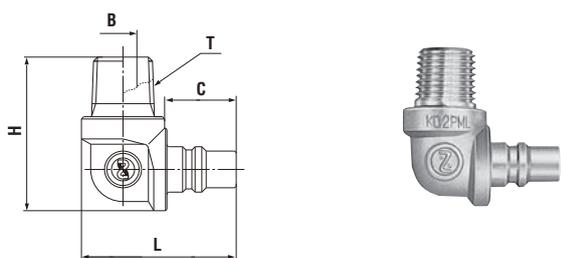

| Model   | Application | Mass (g) | Dimensions (mm) |    |      |       |    |
|---------|-------------|----------|-----------------|----|------|-------|----|
|         |             |          | L               | C  | H    | T     | øB |
| K-01PML | Rc 1/8      | 43       | 33.5            | 15 | 30.5 | R 1/8 | 5  |
| K-02PML | Rc 1/4      | 53       | 33.5            | 15 | 33.5 | R 1/4 | 6  |
| K-03PML | Rc 3/8      | 71       | 33.5            | 15 | 33.5 | R 3/8 | 6  |


**Plug PM-HH type (Male thread)**

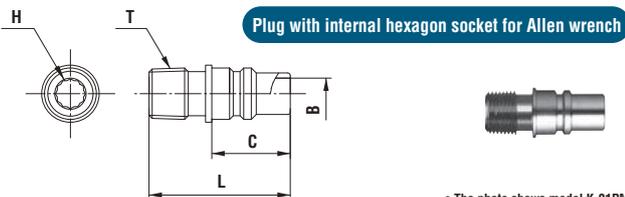

• The photo shows model K-01PM-HH.


| Model     | Application | Mass (g) | Dimensions (mm)  |    |   |    |       |    |
|-----------|-------------|----------|------------------|----|---|----|-------|----|
|           |             |          | Outside Diameter | L  | H | C  | T     | øB |
| K-01PM-HH | Rc 1/8      | 9        | ø11              | 27 | 5 | 15 | R 1/8 | 6  |
| K-02PM-HH | Rc 1/4      | 15       | (ø13.4)          | 29 | 5 | 15 | R 1/4 | 6  |

**Socket SH type (Hose barb)**

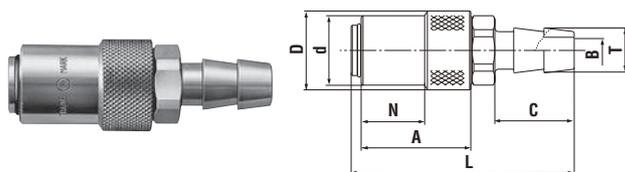


| Model  | Application (Hose) | Mass (g) | Dimensions (mm) |      |      |      |    |    |    |    |
|--------|--------------------|----------|-----------------|------|------|------|----|----|----|----|
|        |                    |          | L               | øD   | ød   | N    | A  | C  | øT | øB |
| K-02SH | 1/4"               | 52       | (67)            | (21) | 18.5 | 16.8 | 29 | 29 | 8  | 5  |
| K-03SH | 3/8"               | 60       | (59)            | (21) | 18.5 | 16.8 | 29 | 21 | 12 | 7  |

**Socket SM type (Male thread)**

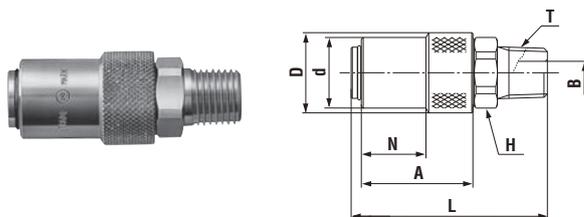


| Model  | Application | Mass (g) | Dimensions (mm) |      |      |      |    |        |       |    |
|--------|-------------|----------|-----------------|------|------|------|----|--------|-------|----|
|        |             |          | L               | øD   | ød   | N    | A  | H(WAF) | T     | øB |
| K-02SM | Rc 1/4      | 70       | (51)            | (21) | 18.5 | 16.8 | 29 | Hex.17 | R 1/4 | 6  |
| K-03SM | Rc 3/8      | 82       | (52)            | (21) | 18.5 | 16.8 | 29 | Hex.19 | R 3/8 | 6  |

**Socket SF type (Female thread)**

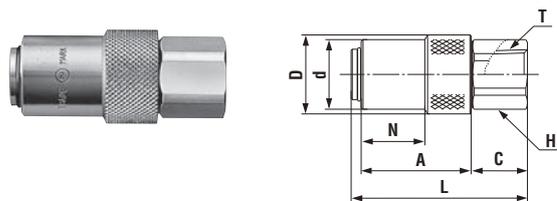

| Model  | Application | Mass (g) | Dimensions (mm) |      |      |      |    |      |        |        |
|--------|-------------|----------|-----------------|------|------|------|----|------|--------|--------|
|        |             |          | L               | øD   | ød   | N    | A  | C    | T      | H(WAF) |
| K-02SF | R 1/4       | 57       | (46.5)          | (21) | 18.5 | 16.8 | 29 | 14.5 | Rc 1/4 | Hex.17 |


**Socket SHL type (Hose barb)**

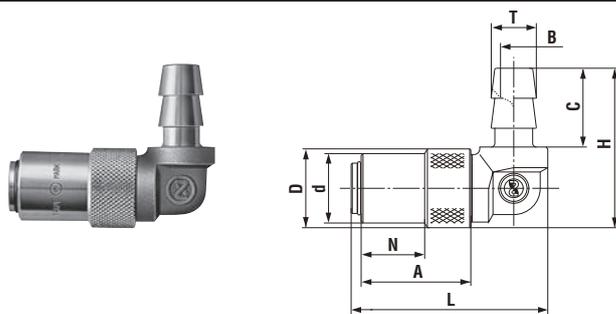

| Model   | Application (Hose) | Mass (g) | Dimensions (mm) |      |      |      |    |    |    |        |     |
|---------|--------------------|----------|-----------------|------|------|------|----|----|----|--------|-----|
|         |                    |          | L               | øD   | ød   | N    | A  | C  | øT | H      | øB  |
| K-02SHL | 1/4"               | 79       | (52)            | (21) | 18.5 | 16.8 | 29 | 21 | 8  | (42.5) | 4.5 |
| K-03SHL | 3/8"               | 87       | (52)            | (21) | 18.5 | 16.8 | 29 | 21 | 12 | (42.5) | 7   |

Note: Also available without socket valve (Made-to-order item), identified by product code TS (e.g. K-03SH without valve is K-03TSH). Also available are Cuplas with sleeve stopper (Made-to-order item).

**Socket SN type (For braided hose connection)**

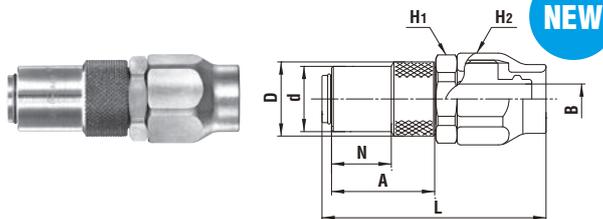

| Model  | Application (Hose) (mm) | Hose wall thickness (mm) | Mass (g) | Dimensions (mm) |      |      |      |    |         |         |     |
|--------|-------------------------|--------------------------|----------|-----------------|------|------|------|----|---------|---------|-----|
|        |                         |                          |          | L               | øD   | ød   | N    | A  | H1(WAF) | H2(WAF) | øB  |
| K-90SN | ø9 x ø15                | 3±0.3                    | 122      | (63)            | (21) | 18.5 | 16.8 | 29 | Hex.23  | Hex.24  | 8.5 |

Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.

For Low Pressure

# Mold Cupla High Flow Type

High flow type mold coolant port coupling

|  |  |   |
|--|--|---|
| <b>Working pressure</b><br>1.0<br>1.0 MPa<br>(10 kgf/cm <sup>2</sup> ) | <b>Valve structure</b><br>One-way shut-off | <b>Applicable fluids</b><br>Water<br>Heated oil |
|--|--|---|


## Flow rate has doubled to increase productivity.

- High flow type K3 and K4 series are added to mold Cupla series for mold coolant and heated oil port coupling.
- Almost double flow rate compared with our standard K01, K02 and K03 series, increasing productivity.
- Space saving design for molds with closely spaced coolant ports.
- Long sleeve socket facilitates connection/disconnection with plug embedded in mold.
- Enables quick mold coolant hose connection / disconnection.




### Results of reduced cooling time in the field

A customer replaced conventional K-0 series Mold cuplas with the K3 series and shortened the cooling time from 30 seconds to 21 seconds meaning an 18% reduction per shot and increased productivity by 20%. Temperature checks at 8 positions on the mold showed that surface temperatures on average had fallen by 3°C, providing evidence of the high cooling efficiency.

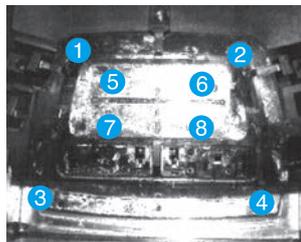


### Flow comparison

Coolant water flow rate was checked with a flow meter, which confirmed increase by 1.7 to 1.8 times, when Mold Cupla K3 series are used.

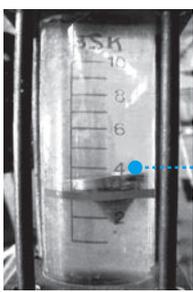

Conventional K-0 series Mold Cuplas were used.

Increased by  
1.7 to 1.8 times UP

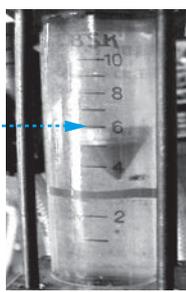

K3 series are used.

| Specifications           |                     |                  |                           |                      |
|--------------------------|---------------------|------------------|---------------------------|----------------------|
| Body material            |                     | Brass            |                           |                      |
| Size                     | Thread              | 1/4", 3/8", 1/2" |                           |                      |
|                          | Hose barb           | 3/8", 1/2" hose  |                           |                      |
| Working pressure         | MPa                 | 1.0              |                           |                      |
|                          | kgf/cm <sup>2</sup> | 10               |                           |                      |
|                          | bar                 | 10               |                           |                      |
|                          | PSI                 | 145              |                           |                      |
| Seal material            | Seal material       | Mark             | Working temperature range | Remarks              |
| Working temperature rang | Nitrile rubber      | NBR (SG)         | -20°C to +80°C            | Standard material    |
|                          | Fluoro rubber       | FKM (X-100)      | -20°C to +180°C           | Available on request |

| Max. Tightening Torque |        | Nm (kgf·cm) |          |
|------------------------|--------|-------------|----------|
| Size (Thread)          | 1/4"   | 3/8"        | 1/2"     |
| Torque                 | 9 {92} | 11 {112}    | 20 {204} |

### Flow Direction

Fluid may flow in either direction from plug or from socket side when coupled.



### Interchangeability

In K3 series sockets and plugs can be connected regardless of end configurations and sizes. In K4 series sockets and plugs can be connected regardless of end configurations and sizes. K3 series and K4 series cannot be connected to each other, or indeed to other mold Cuplas.

| Min. Cross-Sectional Area |        | (mm <sup>2</sup> ) |         |         |         |         |
|---------------------------|--------|--------------------|---------|---------|---------|---------|
| Plug                      | Socket | K3-03SH            | K3-04SH | K3-03SM | K3-03SF | K4-04SH |
| K3-03PH                   |        | 38                 | 38      | 38      | 38      | -       |
| K3-02PM                   |        | 38                 | 62.5    | 62.5    | 62.5    | -       |
| K3-03PM                   |        | 38                 | 62.5    | 62.5    | 62.5    | -       |
| K3-03PF                   |        | 38                 | 62.5    | 62.5    | 62.5    | -       |
| K4-04PM                   |        | -                  | -       | -       | -       | 78.5    |

### Suitability for Vacuum


Not suitable for vacuum application in either connected or disconnected condition.

### Plug Embedment Dimensions

| Plug Embedment Dimensions |            | (mm)   |    |  |   | Remarks |
|---------------------------|------------|--------|----|--|---|---------|
| Model                     | D*         | C*     | L  |  |   |         |
| K3-02PM                   | 24 or more | 0 to 3 | 31 |  | * Socket interference prevents connection/disconnection when C exceeds 3 mm.                                    |         |
| K3-03PM                   | 24 or more | 0 to 3 | 31 |  | * Size D should be bigger than the outer diameter of the socket wrench to be used. (See JISB4636-1, JISB4636-2) |         |
| K4-04PM                   | 32 or more | 0 to 3 | 39 |  |   |         |


### Flow Rate – Pressure Loss Characteristics (Comparison with Mold Cupla)

[Test conditions] • Fluid : Water • Temperature : Room temperature

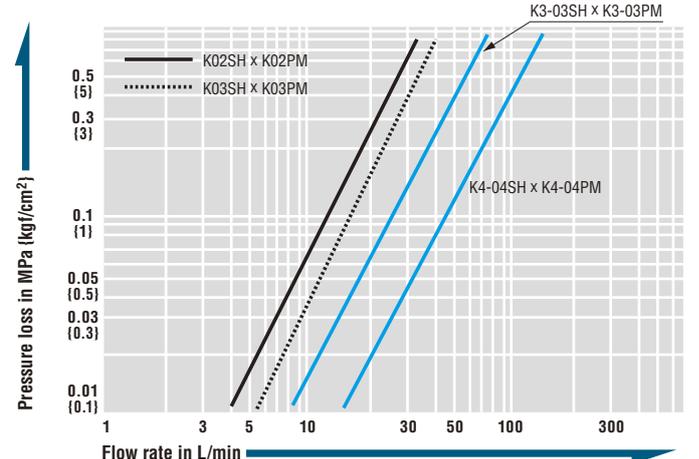


Models and Dimensions

**Plug PH type (Hose barb / High flow type)**

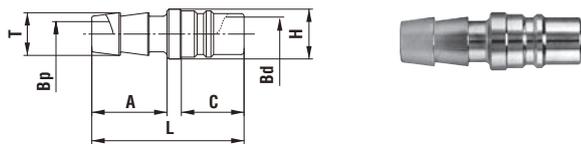


| Model   | Application (Hose) | Mass (g) | Dimensions (mm) |    |      |    |    |     |     |
|---------|--------------------|----------|-----------------|----|------|----|----|-----|-----|
|         |                    |          | L               | A  | C    | ØH | ØT | ØBp | ØBd |
| K3-03PH | 3/8"               | 19       | 42.5            | 21 | 17.5 | 14 | 12 | 7   | 9.5 |

**Plug PM type (Male thread / High flow type)**

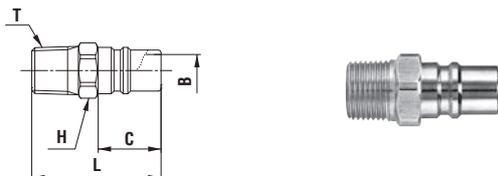


| Model   | Application | Mass (g) | Dimensions (mm) |      |        |       |     |
|---------|-------------|----------|-----------------|------|--------|-------|-----|
|         |             |          | L               | C    | H(WAF) | ØT    | ØB  |
| K3-02PM | Rc 1/4      | 16       | 36              | 17.5 | Hex.14 | R 1/4 | 9   |
| K3-03PM | Rc 3/8      | 25       | 36              | 17.5 | Hex.17 | R 3/8 | 9.5 |
| K4-04PM | Rc 1/2      | 50       | 46              | 21.5 | Hex.22 | R 1/2 | 13  |

**Plug PF type (Female thread / High flow type)**

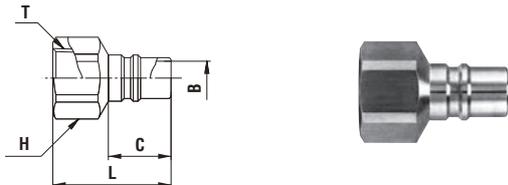


| Model   | Application | Mass (g) | Dimensions (mm) |        |      |        |     |
|---------|-------------|----------|-----------------|--------|------|--------|-----|
|         |             |          | L               | H(WAF) | C    | T      | ØB  |
| K3-03PF | R 3/8       | 30       | 33              | Hex.21 | 17.5 | Rc 3/8 | 9.5 |

**Socket SH type (Hose barb / High flow type)**

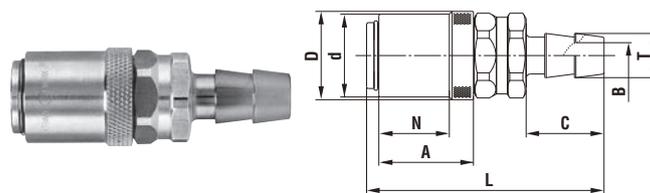


| Model   | Application (Hose) | Mass (g) | Dimensions (mm) |      |      |      |      |    |    |    |
|---------|--------------------|----------|-----------------|------|------|------|------|----|----|----|
|         |                    |          | L               | ØD   | Ød   | N    | A    | C  | ØT | ØB |
| K3-03SH | 3/8"               | 100      | (65)            | (24) | 22.5 | 19   | 25.5 | 21 | 12 | 7  |
| K3-04SH | 1/2"               | 102      | (67)            | (24) | 22.5 | 19   | 25.5 | 23 | 15 | 10 |
| K4-04SH | 1/2"               | 226      | (82)            | (32) | 30   | 26.5 | 34   | 23 | 15 | 10 |

**Socket SM type (Male thread / High flow type)**

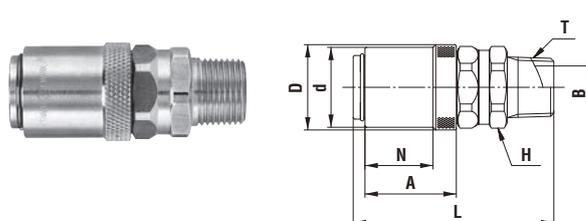

| Model   | Application | Mass (g) | Dimensions (mm) |      |      |    |      |        |       |    |
|---------|-------------|----------|-----------------|------|------|----|------|--------|-------|----|
|         |             |          | L               | ØD   | Ød   | N  | A    | H(WAF) | T     | ØB |
| K3-03SM | Rc 3/8      | 90       | (56)            | (24) | 22.5 | 19 | 25.5 | Hex.21 | R 3/8 | 12 |

**Socket SF type (Female thread / High flow type)**

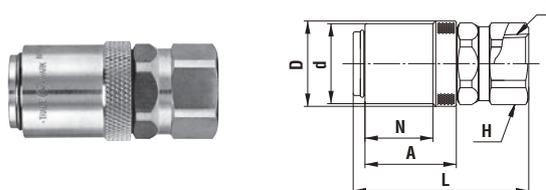


| Model   | Application | Mass (g) | Dimensions (mm) |      |      |    |      |        |        |  |
|---------|-------------|----------|-----------------|------|------|----|------|--------|--------|--|
|         |             |          | L               | ØD   | Ød   | N  | A    | T      | H(WAF) |  |
| K3-03SF | R 3/8       | 87       | (49)            | (24) | 22.5 | 19 | 25.5 | Rc 3/8 | Hex.21 |  |

Notes: Also available without socket valve (Made-to-order item), identified by product code TS (e.g. K3-03SH without valve is K3-03TSH). Also available are Cuplas with sleeve stopper (Made-to-order item).

For Low Pressure

Flow Meter

Flow meter with special valve for mold cooling line




For stable and accurate coolant flow rate.


- Graduated scale enables easy visual check of coolant flow rate regardless of operator.
- Built-in flow rate adjustment valve enables desired setting of mold conditions for each machine.
- Easy resumption of previously set molding conditions to cut lead times.
- T2 side is equipped with rotary function. Even after fixing the body on T1 side to the piping, additional screw tightening on T2 side is possible.

Pressure - Flow Characteristics

[Test conditions] • Fluid : Water • Temperature : Room temperature • Valve open level : 100%

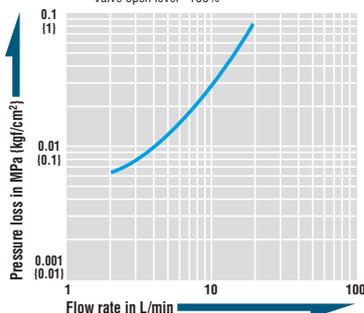

Application

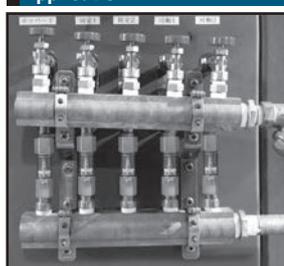

Specifications

|                           |   |                                     |                           |                   |
|---------------------------|---|-------------------------------------|---------------------------|-------------------|
| Body material             | Body: Brass Graduated tube: Polycarbonate |                                     |                           |                   |
| Size (Thread)             | Both ends Rc 3/8 female thread            |                                     |                           |                   |
| Working pressure          | MPa                                       | 0.5                                 |                           |                   |
|                           | kgf/cm <sup>2</sup>                       | 5                                   |                           |                   |
|                           | bar                                       | 5                                   |                           |                   |
|                           | PSI                                       | 72.5                                |                           |                   |
| Max. flow rate            | L/min                                     | 18 L/min (0 to 18 L/min adjustable) |                           |                   |
| Seal material             | Seal material                             | Mark                                | Working temperature range | Remarks           |
| Working temperature range | Nitrile rubber                            | NBR (SG)                            | -20°C to +60°C            | Standard material |

• Use within the temperature range of +10°C to +60°C due to plastic float material.


Max. Tightening Torque

Nm (kgf·cm)

|        |          |
|--------|----------|
| Torque | 11 (112) |
|--------|----------|

Models and Dimensions / Flow Direction

WAF : WAF stands for width across flats.

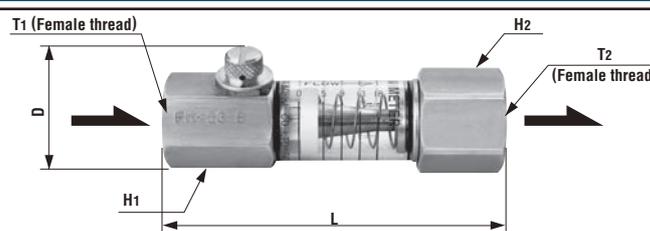

Fluid must flow in the direction of the arrows.

| Model   | Mass (g) | Dimensions (mm) |      |         |         |        |        |
|---------|----------|-----------------|------|---------|---------|--------|--------|
|         |          | L               | D    | H1(WAF) | H2(WAF) | T1     | T2     |
| FM-03-B | 190      | (89)            | (33) | Hex.23  | Hex.26  | Rc 3/8 | Rc 3/8 |

Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.

For Low Pressure

# Lever Lock Cupla Metal Body / Plastic Body

For bulk flow, low pressure applications

Working pressure

0.7 to 1.8 MPa  
(7 to 18 kgf/cm<sup>2</sup>)

Working pressure

0.2 to 0.5 MPa  
(2 to 5 kgf/cm<sup>2</sup>)

Valve structure

Straight through

Designs and specifications are subject to change for improvement without notice

Applicable fluids (plastic body Cuplas are for water or air only)

Water

Hydraulic oil

Air

Powder

Steam

Note: Depending on the temperature of steam/hot water, the heat may damage seal materials. Please contact one of our distributors.

Light lever pull-down will connect the plug and socket without fail ready to flow liquid or gases.

- This Cupla complies with diversified applications in liquid or gas transportation.
- End-face seal structure enables no bumps or hollows on the internal fluid passage, and ensures smooth fluid transportation.
- A special lip packing (except sizes 3/4 and 1", silicone rubber, and FEP-covered rubber) employed reduces the load to the lever for easy operation.
- Connection part dimensions comply with US military specifications MIL-A-A-59326.
- The variety of body materials, sizes and end configurations has been standardized to comply with wide range of applications.
- Additional stopper function design will enhance safety (only for made-to-order metal body product).



## Specifications (Metal Body)

|                                 |  |        |             |               |                           |              |     |     |
|---------------------------------|--|--------|-------------|---------------|---------------------------|--------------|-----|-----|
| Body material (Material symbol) | Aluminum alloy (AL), Copper alloy (BR) |        |             |               | Stainless steel (SUS)     |              |     |     |
| Size (Thread and hose)          | 3/4" to 2"                             | 2 1/2" | 3"          | 4"            | 3/4" to 2"                | 2 1/2" to 3" | 4"  |     |
| Working pressure                | MPa                                    | 1.8    | 1.1         | 0.9           | 0.7                       | 1.8          | 1.6 | 1.1 |
|                                 | kgf/cm <sup>2</sup>                    | 18     | 11          | 9             | 7                         | 18           | 16  | 11  |
|                                 | bar                                    | 18     | 11          | 9             | 7                         | 18           | 16  | 11  |
|                                 | PSI                                    | 261    | 160         | 131           | 102                       | 261          | 232 | 160 |
| Seal material                   | Nitrile rubber                         |        | Mark        |               | Working temperature range |              |     |     |
| Working temperature range       |  |        | NBR (SG)    |               | -20°C to +80°C            |              |     |     |
| Optional seal material          | Seal material                          |        | Mark        |               | Working temperature range |              |     |     |
|                                 | Silicone rubber                        |        | SI          |               | -40°C to +150°C           |              |     |     |
|                                 | Fluoro rubber                          |        | FKM (X-100) |               | -20°C to +180°C           |              |     |     |
|                                 | Ethylene-propylene rubber              |        | EPDM (EPT)  |               | -40°C to +150°C           |              |     |     |
| FEP-covered silicon rubber*     |  | —      |             | +5°C to +50°C |                           |              |     |     |

\*Made-to-order item (Working pressure : 0.2 MPa (2 kgf/cm<sup>2</sup>))

## Specifications (Plastic Body)

|                                 |                           |             |                           |
|---------------------------------|---------------------------|-------------|---------------------------|
| Body material (Material symbol) | Polypropylene (PP)        |             |                           |
| Size (Thread and hose)          | 3/4", 1", 1 1/2"          |             | 2", 3"                    |
| Working pressure*               | MPa                       | 0.5         |                           |
|                                 | kgf/cm <sup>2</sup>       | 5           |                           |
|                                 | bar                       | 5           |                           |
|                                 | PSI                       | 72.5        |                           |
| Seal material                   | Seal material             | Mark        | Working temperature range |
|                                 | Nitrile rubber            | NBR (SG)    | +5°C to +50°C             |
| Optional seal material          | Seal material             | Mark        | Working temperature range |
|                                 | Silicone rubber           | SI          | +5°C to +50°C             |
|                                 | Fluoro rubber             | FKM (X-100) | +5°C to +50°C             |
|                                 | Ethylene-propylene rubber | EPDM (EPT)  | +5°C to +50°C             |

\*Pressure at 20°C. Pressure reduces as temperature rises.

## Max. Tightening Torque Nm [kgf·cm]

| Size (Thread) | 3/4"            | 1"       | 1 1/4"     | 1 1/2"     | 2"         | 2 1/2"     | 3"         | 4"         |
|---------------|-----------------|----------|------------|------------|------------|------------|------------|------------|
| Torque        | Aluminum alloy  | 50 (510) | 70 (714)   | 120 (1224) | 140 (1428) | 260 (2652) | 350 (3570) | 470 (4794) |
|               | Copper alloy    |          |            |            |            |            |            |            |
|               | Stainless steel | 90 (918) | 120 (1224) | 220 (2244) | 260 (2652) | 350 (3570) | 480 (4896) | 520 (5304) |

## Flow Direction

Fluid may flow in either direction from plug or from socket side when coupled.



## Interchangeability

Same size sockets and plugs are interchangeable regardless of their end configurations. Connection part dimensions are in compliance with MIL-A-A-59326.

## Suitability for Vacuum (Metal Body) 53.0 kPa {400 mmHg}

| Socket only | Plug only | When connected |
|-------------|-----------|----------------|
| —           | —         | Operational    |

## Suitability for Vacuum (Plastic Body)

Not suitable for vacuum application in either connected or disconnected condition.


## Dimensions with Lever Fully Opened

|        |         |                   |                   |           |
|--------|---------|-------------------|-------------------|-----------|
| Metal  | Size    | Dimensions E (mm) |                   |           |
|        |         | Body material     |                   |           |
|        | 3/4"    | AL (122.5)        | BR (122.5)        | SUS (111) |
|        | 1"      | (132)             | (132)             | (125)     |
|        | 1 1/4"  | (183)             | (183)             | (179)     |
|        | 1 1/2"  | (191)             | (191)             | (187)     |
|        | 2"      | (201)             | (201)             | (196)     |
|        | 2 1/2"  | (213)             | (209)             | (209)     |
|        | 3"      | (249)             | (249)             | (251)     |
|        | 4"      | (280)             | (278)             | (277)     |
|        | Plastic | Size              | Dimensions E (mm) |           |
|        |         |                   | 3/4"              | (115)     |
| 1"     |         |                   | (126)             |           |
| 1 1/2" |         |                   | (187)             |           |
| 2"     |         |                   | (195)             |           |
| 3"     | (249)   |                   |                   |           |

Models and Dimensions

Dimensions of products may differ according to body material. / WAF : WAF stands for width across flats.


Plug LE type (Hose barb)

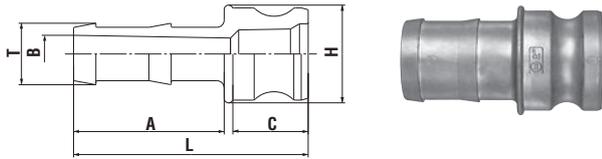

| Material        | Model    | Application (Hose) | Mass (g) | Dimensions (mm) |      |      |      |      |      |  |
|-----------------|----------|--------------------|----------|-----------------|------|------|------|------|------|--|
|                 |          |                    |          | L               | A    | C    | σH   | σT   | σB   |  |
| Aluminum alloy  | LE-6TPH  | 3/4"               | 65       | 81              | 52   | 26   | 34   | 21.4 | 11   |  |
|                 | LE-8TPH  | 1"                 | 100      | 95              | 58   | 34   | 40   | 27.4 | 17.5 |  |
|                 | LE-10TPH | 1 1/4"             | 140      | 102             | 58   | 40   | 48   | 34.1 | 23.5 |  |
|                 | LE-12TPH | 1 1/2"             | 190      | 107             | 61   | 42   | 58   | 40.5 | 29   |  |
|                 | LE-16TPH | 2"                 | 290      | 122             | 70   | 48   | 69   | 53.2 | 40   |  |
|                 | LE-20TPH | 2 1/2"             | 390      | 134.5           | 80   | 50   | 81   | 66.7 | 50   |  |
|                 | LE-24TPH | 3"                 | 545      | 167             | 101  | 61.5 | 97   | 79   | 68   |  |
|                 | LE-32TPH | 4"                 | 850      | 176             | 109  | 57   | 129  | 105  | 93   |  |
|                 | LE-6TPH  | 3/4"               | 215      | 90.5            | 52.5 | 26   | 39   | 21.5 | 12.5 |  |
|                 | LE-8TPH  | 1"                 | 305      | 107             | 60   | 34.5 | 41   | 27.5 | 20   |  |
| Copper alloy    | LE-10TPH | 1 1/4"             | 440      | 102             | 58   | 40   | 48   | 34.1 | 25.5 |  |
|                 | LE-12TPH | 1 1/2"             | 560      | 107             | 61   | 42   | 58   | 40.5 | 31.5 |  |
|                 | LE-16TPH | 2"                 | 865      | 131             | 73   | 54   | 70.5 | 53.5 | 44.5 |  |
|                 | LE-20TPH | 2 1/2"             | 1180     | 149             | 84   | 48   | 91   | 67   | 57   |  |
|                 | LE-24TPH | 3"                 | 1800     | 162             | 99.5 | 56.5 | 102  | 78   | 68   |  |
|                 | LE-32TPH | 4"                 | 3500     | 176             | 109  | 57   | 129  | 105  | 93   |  |
|                 | LE-6TPH  | 3/4"               | 170      | 90              | 52   | 35.5 | 35   | 21   | 15   |  |
|                 | LE-8TPH  | 1"                 | 265      | 107             | 60   | 44   | 42   | 27   | 20   |  |
|                 | LE-10TPH | 1 1/4"             | 430      | 111             | 61   | 40   | 48   | 34   | 25.5 |  |
|                 | LE-12TPH | 1 1/2"             | 530      | 114             | 61   | 40   | 60   | 40   | 33   |  |
| Stainless steel | LE-16TPH | 2"                 | 790      | 131             | 73   | 45   | 70   | 53   | 44   |  |
|                 | LE-20TPH | 2 1/2"             | 1195     | 137             | 80.5 | 50.5 | 83   | 67   | 56   |  |
|                 | LE-24TPH | 3"                 | 1755     | 162             | 99.5 | 56.5 | 102  | 78   | 68   |  |
|                 | LE-32TPH | 4"                 | 2595     | 174             | 109  | 59   | 130  | 105  | 94   |  |


Socket LC type (Hose barb)

Model LC-6TSH made of aluminum alloy and copper alloy has no rings.

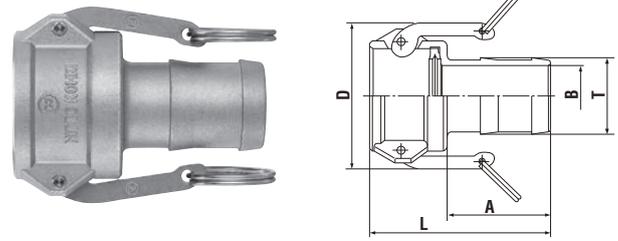

| Material        | Model    | Application (Hose) | Mass (g) | Dimensions (mm) |     |        |      |        |
|-----------------|----------|--------------------|----------|-----------------|-----|--------|------|--------|
|                 |          |                    |          | L               | A   | D      | σT   | σB     |
| Aluminum alloy  | LC-6TSH  | 3/4"               | 140      | 85              | 52  | (60.5) | 21.4 | (11)   |
|                 | LC-8TSH  | 1"                 | 190      | 99              | 58  | (61)   | 27.4 | (17.4) |
|                 | LC-10TSH | 1 1/4"             | 320      | 104             | 58  | (82)   | 34.1 | (23.4) |
|                 | LC-12TSH | 1 1/2"             | 350      | 108.5           | 61  | (90)   | 40.5 | (29.2) |
|                 | LC-16TSH | 2"                 | 430      | 122.5           | 70  | (100)  | 53.2 | 41.4   |
|                 | LC-20TSH | 2 1/2"             | 560      | 136.5           | 80  | (112)  | 66.7 | 54.1   |
|                 | LC-24TSH | 3"                 | 915      | 175             | 100 | (139)  | 79   | 68     |
|                 | LC-32TSH | 4"                 | 1190     | 180             | 104 | (165)  | 104  | 93     |
|                 | LC-6TSH  | 3/4"               | 320      | 85              | 52  | (60.5) | 21.4 | 13     |
|                 | LC-8TSH  | 1"                 | 420      | 99              | 58  | (61)   | 27.4 | 19.5   |
| Copper alloy    | LC-10TSH | 1 1/4"             | 700      | 104             | 58  | (82)   | 34.1 | 23.4   |
|                 | LC-12TSH | 1 1/2"             | 720      | 110             | 62  | (91)   | 41   | 33     |
|                 | LC-16TSH | 2"                 | 870      | 121             | 70  | (100)  | 53   | 44     |
|                 | LC-20TSH | 2 1/2"             | 1530     | 137             | 83  | (113)  | 67   | 57     |
|                 | LC-24TSH | 3"                 | 1795     | 160             | 105 | (139)  | 79   | 68     |
|                 | LC-32TSH | 4"                 | 3100     | 163             | 107 | (168)  | 104  | 92     |
|                 | LC-6TSH  | 3/4"               | 230      | 86              | 52  | (55)   | 21   | 15     |
|                 | LC-8TSH  | 1"                 | 340      | 99              | 60  | (63)   | 27   | 20     |
|                 | LC-10TSH | 1 1/4"             | 615      | 107             | 61  | (85)   | 34   | 25.5   |
|                 | LC-12TSH | 1 1/2"             | 645      | 108             | 61  | (91)   | 40   | 33     |
| Stainless steel | LC-16TSH | 2"                 | 1000     | 129             | 73  | (101)  | 53   | 44     |
|                 | LC-20TSH | 2 1/2"             | 1270     | 134             | 81  | (113)  | 67   | 57     |
|                 | LC-24TSH | 3"                 | 2065     | 158             | 100 | (139)  | 79   | 67     |
|                 | LC-32TSH | 4"                 | 3020     | 165             | 107 | (167)  | 105  | 94     |


Plug LA type (Female thread)

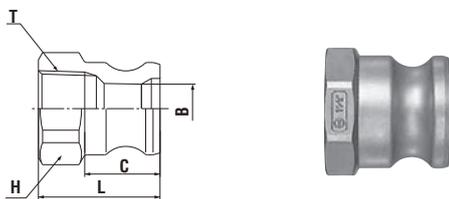

| Material        | Model    | Application (Thread) | Mass (g) | Dimensions (mm) |      |         |      |          | Oct. stands for octagon. | Dod.stands for dodecagon. |
|-----------------|----------|----------------------|----------|-----------------|------|---------|------|----------|--------------------------|---------------------------|
|                 |          |                      |          | L               | C    | H(WAF)  | σB   | T        |                          |                           |
| Aluminum alloy  | LA-6TPF  | 3/4"                 | 45       | 42              | 26   | Hex.36  | 17   | Rc 3/4   |                          |                           |
|                 | LA-8TPF  | 1"                   | 65       | 52              | 34   | Hex.41  | 22.5 | Rc 1     |                          |                           |
|                 | LA-10TPF | 1 1/4"               | 110      | 59              | 40   | Hex.50  | 27.5 | Rc 1 1/4 |                          |                           |
|                 | LA-12TPF | 1 1/2"               | 130      | 58              | 42   | Hex.60  | 34.5 | Rc 1 1/2 |                          |                           |
|                 | LA-16TPF | 2"                   | 170      | 63.5            | 48   | Oct.70  | 44.5 | Rc 2     |                          |                           |
|                 | LA-20TPF | 2 1/2"               | 320      | 85              | 50   | Oct.85  | 55.5 | Rc 2 1/2 |                          |                           |
|                 | LA-24TPF | 3"                   | 370      | 79              | 52.5 | Dod.99  | 73.5 | Rc 3     |                          |                           |
|                 | LA-32TPF | 4"                   | 640      | 82              | 54   | Dod.130 | 100  | Rc 4     |                          |                           |
|                 | LA-6TPF  | 3/4"                 | 145      | 42              | 27   | Oct.34  | 20   | Rc 3/4   |                          |                           |
|                 | LA-8TPF  | 1"                   | 190      | 46              | 32   | Oct.41  | 24   | Rc 1     |                          |                           |
| Copper alloy    | LA-10TPF | 1 1/4"               | 390      | 59              | 40   | Hex.50  | 28   | Rc 1 1/4 |                          |                           |
|                 | LA-12TPF | 1 1/2"               | 420      | 58              | 42   | Oct.60  | 36   | Rc 1 1/2 |                          |                           |
|                 | LA-16TPF | 2"                   | 560      | 63.5            | 48   | Oct.70  | 45   | Rc 2     |                          |                           |
|                 | LA-20TPF | 2 1/2"               | 950      | 79              | 50   | Dod.84  | 56   | Rc 2 1/2 |                          |                           |
|                 | LA-24TPF | 3"                   | 1210     | 71              | 50   | Dod.101 | 70   | Rc 3     |                          |                           |
|                 | LA-32TPF | 4"                   | 1620     | 79              | 53   | Dod.127 | 101  | Rc 4     |                          |                           |
|                 | LA-6TPF  | 3/4"                 | 120      | 39              | 27   | Oct.33  | 19   | Rc 3/4   |                          |                           |
|                 | LA-8TPF  | 1"                   | 170      | 47              | 33   | Oct.41  | 24   | Rc 1     |                          |                           |
|                 | LA-10TPF | 1 1/4"               | 270      | 53.5            | 41   | Oct.50  | 28   | Rc 1 1/4 |                          |                           |
|                 | LA-12TPF | 1 1/2"               | 375      | 55              | 40   | Oct.58  | 35.5 | Rc 1 1/2 |                          |                           |
| Stainless steel | LA-16TPF | 2"                   | 505      | 62              | 47   | Oct.69  | 45   | Rc 2     |                          |                           |
|                 | LA-20TPF | 2 1/2"               | 825      | 77              | 49   | Dod.83  | 56   | Rc 2 1/2 |                          |                           |
|                 | LA-24TPF | 3"                   | 875      | 72              | 51   | Dod.96  | 73   | Rc 3     |                          |                           |
|                 | LA-32TPF | 4"                   | 1470     | 79              | 53   | Dod.124 | 100  | Rc 4     |                          |                           |

Socket LD type (Female thread)

Model LD-6TSF made of aluminum alloy and copper alloy has no rings.

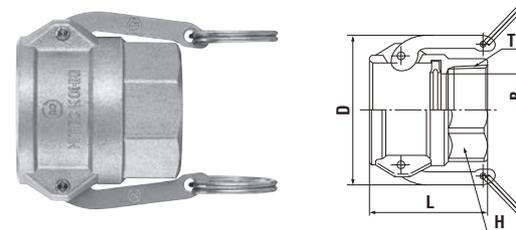


| Material        | Model    | Application (Thread) | Mass (g) | Dimensions (mm) |        |         |      |          | Oct. stands for octagon. | Dod.stands for dodecagon. |
|-----------------|----------|----------------------|----------|-----------------|--------|---------|------|----------|--------------------------|---------------------------|
|                 |          |                      |          | L               | D      | H(WAF)  | σB   | T        |                          |                           |
| Aluminum alloy  | LD-6TSF  | 3/4"                 | 130      | 53              | (62.4) | Hex.36  | 21   | Rc 3/4   |                          |                           |
|                 | LD-8TSF  | 1"                   | 190      | 64.5            | (61)   | Hex.41  | 26   | Rc 1     |                          |                           |
|                 | LD-10TSF | 1 1/4"               | 330      | 72.5            | (82)   | Hex.50  | 34   | Rc 1 1/4 |                          |                           |
|                 | LD-12TSF | 1 1/2"               | 360      | 70.5            | (90)   | Hex.60  | 39   | Rc 1 1/2 |                          |                           |
|                 | LD-16TSF | 2"                   | 420      | 79.5            | (100)  | Oct.70  | 49   | Rc 2     |                          |                           |
|                 | LD-20TSF | 2 1/2"               | 550      | 88.5            | (112)  | Oct.85  | 59   | Rc 2 1/2 |                          |                           |
|                 | LD-24TSF | 3"                   | 800      | 89              | (140)  | Dod.99  | 75   | Rc 3     |                          |                           |
|                 | LD-32TSF | 4"                   | 1140     | 93              | (165)  | Dod.131 | 94   | Rc 4     |                          |                           |
|                 | LD-6TSF  | 3/4"                 | 310      | 53              | (60.5) | Hex.36  | 21   | Rc 3/4   |                          |                           |
|                 | LD-8TSF  | 1"                   | 430      | 64.5            | (61)   | Hex.41  | 26   | Rc 1     |                          |                           |
| Copper alloy    | LD-10TSF | 1 1/4"               | 730      | 72.5            | (82)   | Hex.50  | 34   | Rc 1 1/4 |                          |                           |
|                 | LD-12TSF | 1 1/2"               | 770      | 70.5            | (90)   | Oct.60  | 39   | Rc 1 1/2 |                          |                           |
|                 | LD-16TSF | 2"                   | 990      | 79.5            | (100)  | Oct.70  | 49   | Rc 2     |                          |                           |
|                 | LD-20TSF | 2 1/2"               | 1290     | 81.5            | (113)  | Dod.84  | 61   | Rc 2 1/2 |                          |                           |
|                 | LD-24TSF | 3"                   | 1560     | 87              | (139)  | Oct.96  | 77   | Rc 3     |                          |                           |
|                 | LD-32TSF | 4"                   | 3590     | 91              | (165)  | Dod.126 | 96   | Rc 4     |                          |                           |
|                 | LD-6TSF  | 3/4"                 | 225      | 52              | (55)   | Oct.32  | 19   | Rc 3/4   |                          |                           |
|                 | LD-8TSF  | 1"                   | 350      | 60              | (63)   | Oct.41  | 24   | Rc 1     |                          |                           |
|                 | LD-10TSF | 1 1/4"               | 600      | 68              | (85)   | Oct.50  | 30   | Rc 1 1/4 |                          |                           |
|                 | LD-12TSF | 1 1/2"               | 715      | 72              | (87)   | Oct.58  | 37.5 | Rc 1 1/2 |                          |                           |
| Stainless steel | LD-16TSF | 2"                   | 940      | 78.5            | (100)  | Oct.69  | 50   | Rc 2     |                          |                           |
|                 | LD-20TSF | 2 1/2"               | 1050     | 82              | (113)  | Dod.83  | 61   | Rc 2 1/2 |                          |                           |
|                 | LD-24TSF | 3"                   | 1605     | 84              | (140)  | Dod.97  | 77   | Rc 3     |                          |                           |
|                 | LD-32TSF | 4"                   | 2575     | 94              | (167)  | Dod.125 | 97   | Rc 4     |                          |                           |

Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.

Dimensions of products may differ according to body material. / WAF : WAF stands for width across flats.

Models and Dimensions


Plug LF type (Male thread)

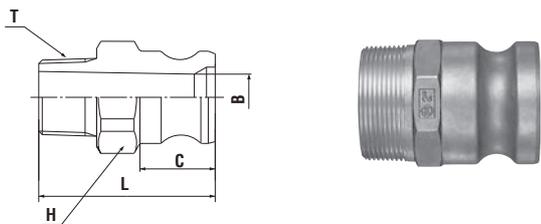

| Material        | Model        | Application (Thread) | Mass (g) | Dimensions (mm) |      |         |        |         |
|-----------------|--------------|----------------------|----------|-----------------|------|---------|--------|---------|
|                 |              |                      |          | L               | C    | H(WAF)  | øB     | T       |
| Aluminum alloy  | LF-6TPM      | 3/4"                 | 70       | 61              | 26   | Hex.36  | 16     | R 3/4   |
|                 | LF-8TPM      | 1"                   | 90       | 73              | 34   | Hex.41  | 22     | R 1     |
|                 | LF-10TPM     | 1 1/4"               | 140      | 81              | 40   | Hex.50  | 28     | R 1 1/4 |
|                 | LF-12TPM     | 1 1/2"               | 150      | 80.5            | 42   | Oct.55  | 34.5   | R 1 1/2 |
|                 | LF-16TPM     | 2"                   | 220      | 89.5            | 48   | Oct.65  | 44.5   | R 2     |
|                 | LF-20TPM     | 2 1/2"               | 370      | 101             | 50   | Oct.80  | 56     | R 2 1/2 |
|                 | LF-24TPM     | 3"                   | 470      | 106             | 52   | Dod.99  | 73     | R 3     |
|                 | LF-32TPM     | 4"                   | 875      | 116             | 54   | Dod.130 | 100    | R 4     |
|                 | Copper alloy | LF-6TPM              | 3/4"     | 185             | 59   | 27      | Oct.34 | 20      |
| LF-8TPM         |              | 1"                   | 280      | 69              | 32   | Oct.41  | 24     | R 1     |
| LF-10TPM        |              | 1 1/4"               | 460      | 81              | 40   | Hex.50  | 28     | R 1 1/4 |
| LF-12TPM        |              | 1 1/2"               | 500      | 80.5            | 42   | Oct.55  | 36     | R 1 1/2 |
| LF-16TPM        |              | 2"                   | 750      | 89.5            | 48   | Oct.65  | 45     | R 2     |
| LF-20TPM        |              | 2 1/2"               | 1290     | 98              | 50   | Dod.83  | 56     | R 2 1/2 |
| LF-24TPM        |              | 3"                   | 1480     | 103             | 50.8 | Dod.96  | 73     | R 3     |
| LF-32TPM        |              | 4"                   | 3155     | 113             | 53   | Dod.126 | 100    | R 4     |
| Stainless steel |              | LF-6TPM              | 3/4"     | 175             | 59   | 27      | Oct.33 | 19      |
|                 | LF-8TPM      | 1"                   | 255      | 69              | 33   | Oct.41  | 24     | R 1     |
|                 | LF-10TPM     | 1 1/4"               | 415      | 80              | 42   | Oct.50  | 29.5   | R 1 1/4 |
|                 | LF-12TPM     | 1 1/2"               | 575      | 80              | 40   | Oct.58  | 36.5   | R 1 1/2 |
|                 | LF-16TPM     | 2"                   | 735      | 87              | 47   | Oct.69  | 46     | R 2     |
|                 | LF-20TPM     | 2 1/2"               | 1020     | 99              | 49   | Dod.83  | 56     | R 2 1/2 |
|                 | LF-24TPM     | 3"                   | 1415     | 103             | 51   | Dod.96  | 73     | R 3     |
|                 | LF-32TPM     | 4"                   | 2275     | 112             | 53   | Dod.124 | 100    | R 4     |


Socket LB type (Male thread)

Model LB-6TSM made of aluminum alloy has no rings.

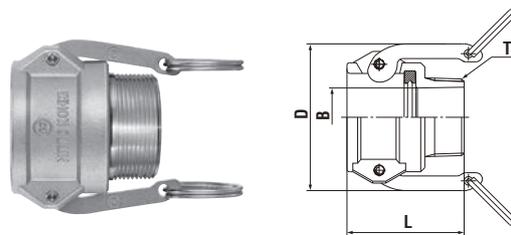


| Material                               | Model                             | Application (Thread) | Mass (g) | Dimensions (mm) |        |       |         |         |
|--|-----------------------------------|----------------------|----------|-----------------|--------|-------|---------|---------|
|  |                                   |                      |          | L               | D      | øB    | T       |         |
| Aluminum alloy                         | LB-6TSM                           | 3/4"                 | 110      | 53              | (60.5) | 17.2  | R 3/4   |         |
|  | LB-8TSM                           | 1"                   | 170      | 65              | (61)   | 23.6  | R 1     |         |
|  | LB-10TSM                          | 1 1/4"               | 310      | 72              | (82)   | 29.5  | R 1 1/4 |         |
|  | LB-12TSM                          | 1 1/2"               | 340      | 71.5            | (90)   | 36    | R 1 1/2 |         |
|  | LB-16TSM                          | 2"                   | 400      | 79.5            | (100)  | 45.9  | R 2     |         |
|  | LB-20TSM                          | 2 1/2"               | 530      | 88.5            | (112)  | 57.7  | R 2 1/2 |         |
|  | LB-24TSM                          | 3"                   | 715      | 90              | (139)  | 76    | R 3     |         |
|  | LB-32TSM                          | 4"                   | 920      | 92              | (165)  | 99    | R 4     |         |
|  | Copper alloy (Made-to-order item) | LB-6TSM              | 3/4"     | 260             | 52     | (53)  | 19.5    | R 3/4   |
|  |                                   | LB-8TSM              | 1"       | 355             | 63     | (62)  | 26      | R 1     |
|  |                                   | LB-10TSM             | 1 1/4"   | 620             | 71     | (84)  | 28      | R 1 1/4 |
|  |                                   | LB-12TSM             | 1 1/2"   | 700             | 71     | (91)  | 36      | R 1 1/2 |
| LB-16TSM                               |                                   | 2"                   | 950      | 81              | (100)  | 51    | R 2     |         |
| LB-20TSM                               |                                   | 2 1/2"               | 1250     | 86              | (113)  | 63    | R 2 1/2 |         |
| LB-24TSM                               |                                   | 3"                   | 1780     | 92              | (139)  | 78    | R 3     |         |
| LB-32TSM                               |                                   | 4"                   | 2540     | 98              | (168)  | 101   | R 4     |         |
| Stainless steel (Available on request) |                                   | LB-6TSM              | 3/4"     | 210             | 52.5   | (55)  | 20      | R 3/4   |
|  |                                   | LB-8TSM              | 1"       | 300             | 63     | (63)  | 25.5    | R 1     |
|  |                                   | LB-10TSM             | 1 1/4"   | 520             | 70.5   | (85)  | 34      | R 1 1/4 |
|  |                                   | LB-12TSM             | 1 1/2"   | 580             | 71.5   | (87)  | 38      | R 1 1/2 |
|  | LB-16TSM                          | 2"                   | 780      | 78.5            | (101)  | 50.5  | R 2     |         |
|  | LB-20TSM                          | 2 1/2"               | 980      | 84              | (113)  | 66    | R 2 1/2 |         |
|  | LB-24TSM                          | 3"                   | 1490     | 92              | (139)  | 78.5  | R 3     |         |
|  | LB-32TSM                          | 4"                   | 2080     | 92              | (167)  | 103.5 | R 4     |         |

Plug L-PD type (Plug cap)

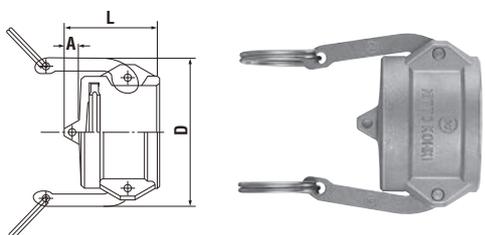

| Material        | Model        | Size   | Mass (g) | Dimensions (mm) |      |       |
|-----------------|--------------|--------|----------|-----------------|------|-------|
|                 |              |        |          | L               | A    | D     |
| Aluminum alloy  | L-6PD        | 3/4"   | 100      | 46              | 12   | (54)  |
|                 | L-8PD        | 1"     | 145      | 54              | 11.5 | (62)  |
|                 | L-10PD       | 1 1/4" | 230      | 60              | 13   | (83)  |
|                 | L-12PD       | 1 1/2" | 295      | 68              | 17   | (91)  |
|                 | L-16PD       | 2"     | 360      | 68              | 11   | (100) |
|                 | L-20PD       | 2 1/2" | 435      | 72              | 15   | (113) |
|                 | L-24PD       | 3"     | 690      | 72              | 10   | (139) |
|                 | L-32PD       | 4"     | 870      | 76              | 15   | (167) |
|                 | Copper alloy | L-6PD  | 3/4"     | 220             | 45   | 11    |
| L-8PD           |              | 1"     | 315      | 53              | 12   | (62)  |
| L-10PD          |              | 1 1/4" | 610      | 61              | 13   | (84)  |
| L-12PD          |              | 1 1/2" | 645      | 69              | 17.5 | (91)  |
| L-16PD          |              | 2"     | 830      | 68              | 11   | (100) |
| L-20PD          |              | 2 1/2" | 980      | 71              | 14   | (113) |
| L-24PD          |              | 3"     | 1380     | 81              | 20   | (139) |
| L-32PD          |              | 4"     | 2700     | 90              | 26   | (168) |
| Stainless steel |              | L-6PD  | 3/4"     | 180             | 45   | 12    |
|                 | L-8PD        | 1"     | 265      | 52              | 11   | (63)  |
|                 | L-10PD       | 1 1/4" | 475      | 60              | 11   | (85)  |
|                 | L-12PD       | 1 1/2" | 545      | 63              | 15   | (87)  |
|                 | L-16PD       | 2"     | 720      | 65              | 11   | (101) |
|                 | L-20PD       | 2 1/2" | 945      | 71              | 15   | (113) |
|                 | L-24PD       | 3"     | 1420     | 72              | 12   | (139) |
|                 | L-32PD       | 4"     | 2055     | 77              | 14   | (167) |

Socket L-SD type (Socket cap)

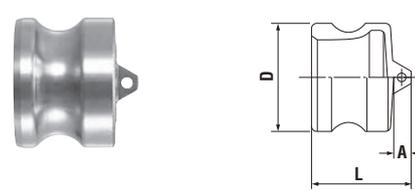


| Material        | Model        | Size   | Mass (g) | Dimensions (mm) |      |       |      |
|-----------------|--------------|--------|----------|-----------------|------|-------|------|
|                 |              |        |          | L               | A    | øD    |      |
| Aluminum alloy  | L-6SD        | 3/4"   | 35       | 32              | 8    | 32    |      |
|                 | L-8SD        | 1"     | 45       | 44              | 10   | 36.7  |      |
|                 | L-10SD       | 1 1/4" | 70       | 57              | 14   | 45.5  |      |
|                 | L-12SD       | 1 1/2" | 90       | 54              | 15   | 53.4  |      |
|                 | L-16SD       | 2"     | 140      | 62              | 13   | 63    |      |
|                 | L-20SD       | 2 1/2" | 210      | 69              | 20   | 75.8  |      |
|                 | L-24SD       | 3"     | 290      | 71              | 15   | 91.5  |      |
|                 | L-32SD       | 4"     | 960      | 74              | 16   | 119.4 |      |
|                 | Copper alloy | L-6SD  | 3/4"     | 160             | 34   | 8     | 32.1 |
|                 |              | L-8SD  | 1"       | 150             | 44   | 10    | 36.7 |
|                 |              | L-10SD | 1 1/4"   | 210             | 55   | 12    | 45.5 |
|                 |              | L-12SD | 1 1/2"   | 290             | 54   | 15    | 53.4 |
| L-16SD          |              | 2"     | 420      | 61              | 13   | 63    |      |
| L-20SD          |              | 2 1/2" | 630      | 69              | 19   | 75.7  |      |
| L-24SD          |              | 3"     | 860      | 71              | 15   | 91.5  |      |
| L-32SD          |              | 4"     | 1780     | 74.5            | 16   | 119.4 |      |
| Stainless steel |              | L-6SD  | 3/4"     | 95              | 39   | 12    | 32   |
|                 |              | L-8SD  | 1"       | 145             | 45   | 12    | 37   |
|                 |              | L-10SD | 1 1/4"   | 250             | 51   | 10    | 45   |
|                 |              | L-12SD | 1 1/2"   | 300             | 54   | 14    | 53   |
|                 | L-16SD       | 2"     | 490      | 59.5            | 12.5 | 63    |      |
|                 | L-20SD       | 2 1/2" | 710      | 64              | 14   | 76    |      |
|                 | L-24SD       | 3"     | 930      | 68              | 14   | 92    |      |
|                 | L-32SD       | 4"     | 1275     | 68              | 14   | 120   |      |

Models and Dimensions


Designs and specifications are subject to change for improvement without notice. / WAF : WAF stands for width across flats.

**Plug** LE type (Hose barb)

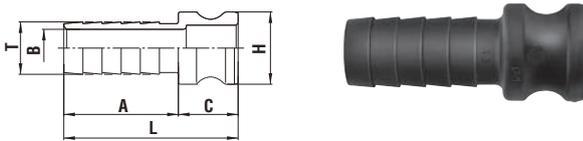

| Material | Model    | Application (Hose) | Mass (g) | Dimensions (mm) |      |        |      |      |      |
|----------|----------|--------------------|----------|-----------------|------|--------|------|------|------|
|          |          |                    |          | L               | A    | C      | øH   | øT   | øB   |
| Plastic  | LE-6TPH  | 3/4"               | 16       | 74.5            | 51.5 | (23)   | 32.2 | 20.7 | 14.3 |
|          | LE-8TPH  | 1"                 | 29       | 87.5            | 57.5 | (30)   | 36.6 | 26.5 | 19   |
|          | LE-12TPH | 1 1/2"             | 73       | 103             | 61   | (42)   | 53.5 | 40   | 30   |
|          | LE-16TPH | 2"                 | 122      | 119             | 71   | (48)   | 63   | 52.5 | 40.5 |
|          | LE-24TPH | 3"                 | 221      | 152.5           | 108  | (44.5) | 91   | 80   | 65   |

**Socket** LC type (Hose barb)

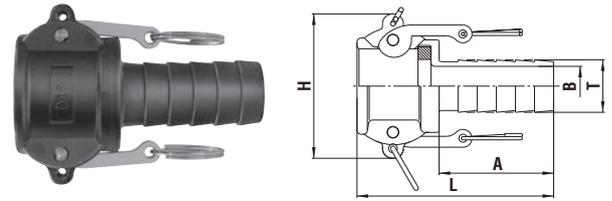


| Material | Model    | Application (Hose) | Mass (g) | Dimensions (mm) |      |       |      |      |
|----------|----------|--------------------|----------|-----------------|------|-------|------|------|
|          |          |                    |          | L               | A    | H     | øT   | øB   |
| Plastic  | LC-6TSH  | 3/4"               | 64       | 83              | 52   | 63.5  | 20.2 | 14   |
|          | LC-8TSH  | 1"                 | 104      | 97.5            | 56.5 | 73    | 26.2 | 20   |
|          | LC-12TSH | 1 1/2"             | 242      | 109.5           | 60.5 | 95    | 39   | 29.5 |
|          | LC-16TSH | 2"                 | 269      | 123.5           | 70.5 | 105.5 | 52   | 41   |
|          | LC-24TSH | 3"                 | 527      | 161             | 102  | 137.5 | 77.5 | 65   |

**Plug** LA type (Female thread)




| Material | Model    | Application (Thread) | Mass (g) | Dimensions (mm) |      |            |      |          |
|----------|----------|----------------------|----------|-----------------|------|------------|------|----------|
|          |          |                      |          | L               | C    | H(WAF)     | øB   | T        |
| Plastic  | LA-6TPF  | 3/4"                 | 19       | 42              | 26   | Hex.34     | 21.4 | Rc 3/4   |
|          | LA-8TPF  | 1"                   | 27       | 59              | 34   | Hex.43     | 22   | Rc 1     |
|          | LA-12TPF | 1 1/2"               | 65       | 67              | 42   | Ribbed 65  | 36.6 | Rc 1 1/2 |
|          | LA-16TPF | 2"                   | 102      | 73              | 47   | Ribbed 74  | 42   | Rc 2     |
|          | LA-24TPF | 3"                   | 211      | 90              | 52.5 | Ribbed 108 | 72   | Rc 3     |

**Socket** LD type (Female thread)

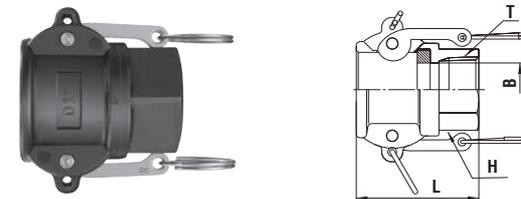


| Material | Model    | Application (Thread) | Mass (g) | Dimensions (mm) |            |      |          |
|----------|----------|----------------------|----------|-----------------|------------|------|----------|
|          |          |                      |          | L               | H(WAF)     | øB   | T        |
| Plastic  | LD-6TSF  | 3/4"                 | 65       | 49.5            | Hex.32     | 21.5 | Rc 3/4   |
|          | LD-8TSF  | 1"                   | 98       | 61.0            | Hex.41     | 27   | Rc 1     |
|          | LD-12TSF | 1 1/2"               | 260      | 78              | Ribbed 68  | 39   | Rc 1 1/2 |
|          | LD-16TSF | 2"                   | 285      | 83.5            | Ribbed 80  | 51   | Rc 2     |
|          | LD-24TSF | 3"                   | 444      | 88.5            | Ribbed 109 | 77.5 | Rc 3     |

**Plug** LF type (Male thread)

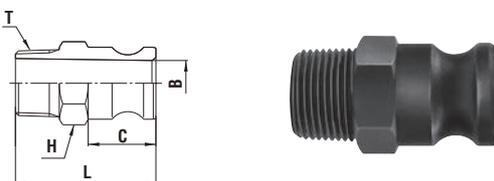


| Material | Model    | Application (Thread) | Mass (g) | Dimensions (mm) |    |            |      |         |
|----------|----------|----------------------|----------|-----------------|----|------------|------|---------|
|          |          |                      |          | L               | C  | H(WAF)     | øB   | T       |
| Plastic  | LF-6TPM  | 3/4"                 | 23       | 60              | 26 | Hex.32     | 19   | R 3/4   |
|          | LF-8TPM  | 1"                   | 19       | 71              | 34 | Hex.37     | 23   | R 1     |
|          | LF-12TPM | 1 1/2"               | 72       | 77              | 42 | Ribbed 63  | 32   | R 1 1/2 |
|          | LF-16TPM | 2"                   | 105      | 84.5            | 48 | Ribbed 74  | 44.5 | R 2     |
|          | LF-24TPM | 3"                   | 210      | 102             | 51 | Ribbed 100 | 72   | R 3     |

**Socket** LB type (Male thread)

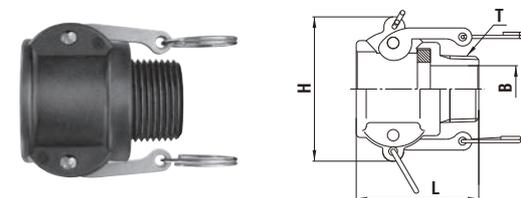

| Material | Model    | Application (Thread) | Mass (g) | Dimensions (mm) |       |      |         |
|----------|----------|----------------------|----------|-----------------|-------|------|---------|
|          |          |                      |          | L               | H     | øB   | T       |
| Plastic  | LB-6TSM  | 3/4"                 | 58       | 51              | 63.5  | 19   | R 3/4   |
|          | LB-8TSM  | 1"                   | 88       | 63              | (62)  | 26   | R 1     |
|          | LB-12TSM | 1 1/2"               | 227      | 71              | 101   | 36   | R 1 1/2 |
|          | LB-16TSM | 2"                   | 251      | 84              | 108   | 48.5 | R 2     |
|          | LB-24TSM | 3"                   | 397      | 91              | (136) | 75   | R 3     |

**Plug** L-PD type (Plug cap)

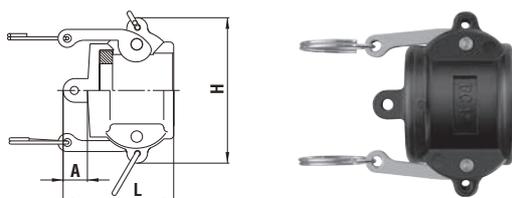

| Material | Model  | Size   | Mass (g) | Dimensions (mm) |      |      |
|----------|--------|--------|----------|-----------------|------|------|
|          |        |        |          | L               | A    | H    |
| Plastic  | L-6PD  | 3/4"   | 60       | 45              | 12   | 65.5 |
|          | L-8PD  | 1"     | 94       | 55              | 12   | 73   |
|          | L-12PD | 1 1/2" | 214      | 65              | 15   | 101  |
|          | L-16PD | 2"     | 219      | 69              | 14   | 106  |
|          | L-24PD | 3"     | 408      | 77              | 17.5 | 138  |

**Socket** L-SD type (Socket cap)



| Material | Model  | Size   | Mass (g) | Dimensions (mm) |    |      |
|----------|--------|--------|----------|-----------------|----|------|
|          |        |        |          | L               | A  | øD   |
| Plastic  | L-6SD  | 3/4"   | 10       | 35.5            | 11 | 32.2 |
|          | L-8SD  | 1"     | 18       | 42.2            | 11 | 36.6 |
|          | L-12SD | 1 1/2" | 46       | 53              | 14 | 53.5 |
|          | L-16SD | 2"     | 68       | 64              | 16 | 63   |
|          | L-24SD | 3"     | 102      | 65              | 18 | 91   |

## For Medium Pressure

# TSP Cupla

For medium pressure general applications

Working pressure



Valve structure



Applicable fluids for braided hose connection type depend upon the specifications of braided hoses to be used.

Applicable fluids



Note: Depending on the temperature of steam/hot water, the heat may damage seal materials. Please contact one of our distributors.

**Valveless structure suits high viscosity fluids! Various body materials, sizes and end configurations. Braided hose connection types are newly added.**

- Valveless construction drastically saves pressure loss and achieves high flow rate.
- Suitable for high viscosity fluids (such as grease).
- Available in various standard body materials, sizes and end configurations to cope with diversified applications and operating situations.
- No hose clamp required! Simple and secure connection to braided hose.

Note: See the pages of Seal Material Selection Table at the end of this catalog for the suitability of seal materials to fluids.



For connection to braided hoses




| Specifications         |                           |                           |               |             |                        |  |               |                   |     |
|------------------------|---------------------------|---------------------------|---------------|-------------|------------------------|--|---------------|-------------------|-----|
| Body material          | Brass                     |                           |               |             |                        | Stainless steel, Steel (Nickel-plated) |               |                   |     |
| Size (Thread and hose) | 1/8", 1/4", 3/8", 1/2"    | 3/4" 1"                   | 1 1/4" 1 1/2" | 2"          | 1/8", 1/4", 3/8", 1/2" | 3/4" 1"                                | 1 1/4" 1 1/2" | 2"                |     |
| Working pressure       | MPa                       | 5.0                       | 3.0           | 2.0         | 1.5                    | 7.5                                    | 4.5           | 3.0               | 2.0 |
|                        | kgf/cm <sup>2</sup>       | 51                        | 31            | 20          | 15                     | 76                                     | 46            | 31                | 20  |
|                        | bar                       | 50                        | 30            | 20          | 15                     | 75                                     | 45            | 30                | 20  |
|                        | PSI                       | 725                       | 435           | 290         | 218                    | 1090                                   | 653           | 435               | 290 |
| Seal material          | Seal material             | Nitrile rubber            |               | Mark        |                        | Working temperature range              |               | Remarks           |     |
|                        | Working temperature range | Nitrile rubber            |               | NBR (SG)    |                        | -20°C to +80°C                         |               | Standard material |     |
|                        |                           | Fluoro rubber             |               | FKM (X-100) |                        | -20°C to +180°C                        |               |                   |     |
|                        |                           | Ethylene-propylene rubber |               | EPDM (EPT)  |                        | -40°C to +150°C                        |               |                   |     |

- SUS316 is available as option.
- Working pressure and working temperature range of TSP Cupla for braided hoses depend upon the specifications of braided hoses to be used.
- Seal material for braided hoses is nitrile rubber.

| Max. Tightening Torque |                 |        |          |          |          |          |            |            |            |            |
|------------------------|-----------------|--------|----------|----------|----------|----------|------------|------------|------------|------------|
| Size (Thread)          |                 | 1/8"   | 1/4"     | 3/8"     | 1/2"     | 3/4"     | 1"         | 1 1/4"     | 1 1/2"     | 2"         |
| Torque                 | Steel           | 9 (92) | 14 (143) | 22 (224) | 60 (612) | 90 (918) | 120 (1224) | 260 (2652) | 280 (2856) | 500 (5100) |
|                        | Brass           | 5 (51) | 9 (92)   | 12 (122) | 30 (306) | 50 (510) | 65 (663)   | 150 (1530) | 160 (1632) | 260 (2652) |
|                        | Stainless steel | 9 (92) | 14 (143) | 22 (224) | 60 (612) | 90 (918) | 120 (1224) | 260 (2652) | 280 (2856) | 500 (5100) |

- Tighten the nut for braided hoses until it is flush against the hose barb base.

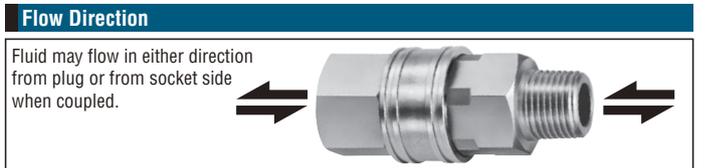

**Interchangeability**


If the first digit of model number of socket is the same as that of plug, they can be connected regardless of the end configurations.

| Min. Cross-Sectional Area (mm <sup>2</sup> )  |             |             |            |            |           |           |           |            |            |
|---|-------------|-------------|------------|------------|-----------|-----------|-----------|------------|------------|
| Model   | 1TSP        | 2TSP        | 3TSP       | 4TSP       | 6TSP      | 8TSP      | 10TSP     | 12TSP      | 16TSP      |
| End configurations                            |             |             |            |            |           |           |           |            |            |
| H type (Hose barb)                            | 7.0 (ø3)    | 19.6 (ø5)   | 38.4 (ø7)  | 78.5 (ø10) | 176 (ø15) | 283 (ø19) | 530 (ø26) | 804 (ø32)  | 1256 (ø40) |
| M type / F type (Male thread / Female thread) | 15.9 (ø4.5) | 33.1 (ø6.5) | 78.5 (ø10) | 132 (ø13)  | 226 (ø17) | 452 (ø24) | 804 (ø32) | 1134 (ø38) | 1885 (ø49) |
| Model   | 2TSN-60     | 3TSN-90     | 4TSN-120   | 4TSN-150   | 6TSN-190  | 8TSN-250  |           |            |            |
| End configurations                            | 2TPN-60     | 3TPN-90     | 4TPN-120   | 4TPN-150   | 6TPN-190  | 8TPN-250  |           |            |            |
| N type (For braided hose connection)          | 23.7 (ø5.5) | 56.7 (ø8.5) | 95.0 (ø11) | 132 (ø13)  | 226 (ø17) | 415 (ø23) |           |            |            |


| Suitability for Vacuum                                |           |                |
|---|-----------|----------------|
| 1.3 x 10 <sup>-1</sup> Pa {1 x 10 <sup>-3</sup> mmHg} |           |                |
| Socket only   | Plug only | When connected |
| —   | —         | Operational    |

### Flow Rate – Pressure Loss Characteristics

[Test conditions] • Fluid : Hydraulic oil • Temperature : 30°C ± 10°C  
• Fluid viscosity : 32 x 10<sup>-6</sup> m<sup>2</sup>/s • Density : 0.87 x 10<sup>3</sup> kg/m<sup>3</sup>

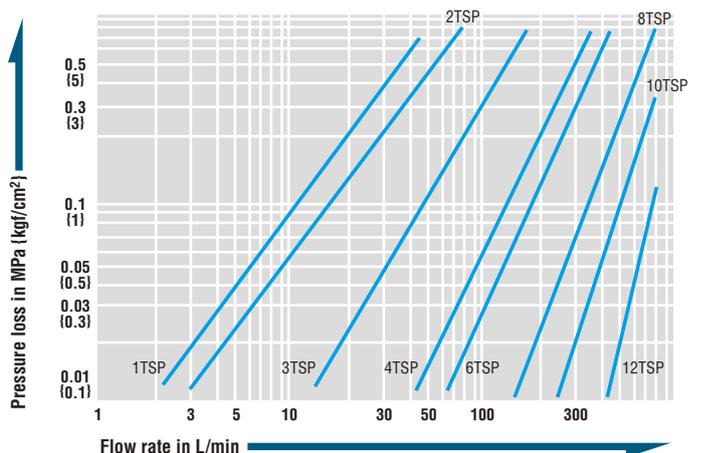


**Plug TPH type (Hose barb)**

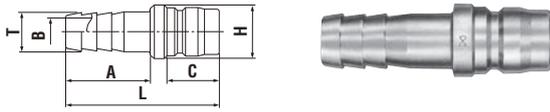


| Model | Application (Hose) | Mass (g)         |       |                 | Dimensions (mm) |    |    |      |      |    |
|-------|--------------------|------------------|-------|-----------------|-----------------|----|----|------|------|----|
|       |                    | Steel            | Brass | Stainless steel | L               | øH | A  | C    | øT   | øB |
| 1TPH  | 1/8"               | 12 <sup>+1</sup> | 13    | 12              | 41              | 12 | 20 | 15.5 | 6.5  | 3  |
| 2TPH  | 1/4"               | 21               | 23    | 21              | 53              | 14 | 29 | 18   | 8    | 5  |
| 3TPH  | 3/8"               | 38               | 41    | 38              | 60              | 18 | 32 | 21   | 11   | 7  |
| 4TPH  | 1/2"               | 71               | 77    | 71              | 70              | 22 | 39 | 24   | 15   | 10 |
| 6TPH  | 3/4"               | 134              | 146   | 135             | 84              | 28 | 48 | 28   | 21   | 15 |
| 8TPH  | 1"                 | 327              | 356   | 329             | 105             | 40 | 57 | 36   | 27   | 19 |
| 10TPH | 1 1/4"             | 495              | 530   | 500             | 121             | 48 | 70 | 39   | 34.5 | 26 |
| 12TPH | 1 1/2"             | 665              | 715   | 660             | 132             | 55 | 75 | 45   | 41   | 32 |
| 16TPH | 2"                 | 1,330            | 1,430 | 1,345           | 142             | 70 | 80 | 51   | 54   | 40 |

**Plug TPM type (Male thread)**

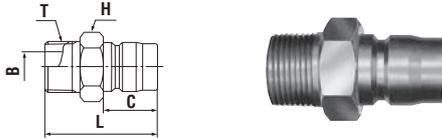


| Model | Application | Mass (g)         |       |                 | Dimensions (mm) |                      |      |         |     |  |
|-------|-------------|------------------|-------|-----------------|-----------------|----------------------|------|---------|-----|--|
|       |             | Steel            | Brass | Stainless steel | L               | H(WAF)               | C    | T       | øB  |  |
| 1TPM  | Rc 1/8      | 16 <sup>+1</sup> | 17    | 17              | 32              | Hex.12               | 15.5 | R 1/8   | 4.5 |  |
| 2TPM  | Rc 1/4      | 30               | 33    | 30              | 38              | Hex.17               | 18   | R 1/4   | 6.5 |  |
| 3TPM  | Rc 3/8      | 38               | 42    | 38              | 43              | Hex.17               | 21   | R 3/8   | 10  |  |
| 4TPM  | Rc 1/2      | 81               | 88    | 81              | 52              | Hex.22               | 24   | R 1/2   | 13  |  |
| 6TPM  | Rc 3/4      | 164              | 179   | 165             | 59              | Hex.32               | 28   | R 3/4   | 17  |  |
| 8TPM  | Rc 1        | 273              | 297   | 274             | 73              | Hex.41               | 36   | R 1     | 25  |  |
| 10TPM | Rc 1 1/4    | 520              | 560   | 530             | 83              | Hex.50               | 39   | R 1 1/4 | 32  |  |
| 12TPM | Rc 1 1/2    | 655              | 705   | 665             | 93              | Hex.54 <sup>+2</sup> | 45   | R 1 1/2 | 38  |  |
| 16TPM | Rc 2        | 1,240            | 1,345 | 1,250           | 102             | 75 x ø80             | 51   | R 2     | 50  |  |

**Plug TPF type (Female thread)**

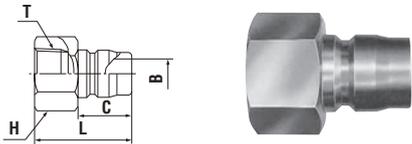


| Model | Application | Mass (g)         |       |                 | Dimensions (mm) |                      |      |          |     |  |
|-------|-------------|------------------|-------|-----------------|-----------------|----------------------|------|----------|-----|--|
|       |             | Steel            | Brass | Stainless steel | L               | H(WAF)               | C    | T        | øB  |  |
| 1TPF  | R 1/8       | 14 <sup>+1</sup> | 15    | 14              | 26              | Hex.14               | 15.5 | Rc 1/8   | 4.5 |  |
| 2TPF  | R 1/4       | 28               | 31    | 29              | 34              | Hex.17               | 18   | Rc 1/4   | 6.5 |  |
| 3TPF  | R 3/8       | 43               | 47    | 43              | 38              | Hex.21               | 21   | Rc 3/8   | 10  |  |
| 4TPF  | R 1/2       | 103              | 113   | 104             | 45              | Hex.29               | 24   | Rc 1/2   | 13  |  |
| 6TPF  | R 3/4       | 166              | 181   | 167             | 51              | Hex.35               | 28   | Rc 3/4   | 17  |  |
| 8TPF  | R 1         | 321              | 350   | 323             | 60              | Hex.41               | 36   | Rc 1     | 26  |  |
| 10TPF | R 1 1/4     | 567              | 615   | 573             | 64              | Hex.54 <sup>+3</sup> | 39   | Rc 1 1/4 | 32  |  |
| 12TPF | R 1 1/2     | 703              | 763   | 630             | 75              | Hex.58 <sup>+4</sup> | 45   | Rc 1 1/2 | 38  |  |
| 16TPF | R 2         | 1,226            | 1,374 | 1,190           | 83              | 77 x ø82             | 51   | Rc 2     | 50  |  |

**Plug TPN type (For braided hose connection)**

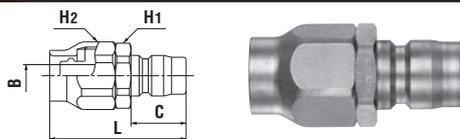


| Model    | Application (Hose) :5 |                          | Mass (g) |                 | Dimensions (mm) |         |         |        |     |    |
|----------|-----------------------|--------------------------|----------|-----------------|-----------------|---------|---------|--------|-----|----|
|          | Size (mm)             | Hose wall thickness (mm) | Brass    | Stainless steel | L               | H1(WAF) | H2(WAF) | C      | øB  |    |
|          |                       |                          |          |                 |                 |         |         |        |     |    |
| 2TPN-60  | ø6 x ø11              | 2.5±0.25                 | 60       | 55              | 47              | Hex.19  | Hex.19  | 18     | 5.5 |    |
| 3TPN-90  | ø9 x ø15              | 3±0.3                    | 93       | 87              | 52              | Hex.23  | Hex.24  | 21     | 8.5 |    |
| 4TPN-120 | ø12 x ø18             |                          | 140      | 130             | 60              | Hex.27  | Hex.27  | 24     | 11  |    |
| 4TPN-150 | ø15 x ø22             |                          | 3.5±0.35 | 182             | 170             | 68      | Hex.30  | Hex.30 | 24  | 13 |
| 6TPN-190 | ø19 x ø26             | 261                      |          | 245             | 76              | Hex.35  | Hex.35  | 28     | 17  |    |
| 8TPN-250 | ø25 x ø33             | 4±0.4                    | 461      | 427             | 96              | Hex.41  | Hex.41  | 36     | 23  |    |

**Socket TSH type (Hose barb)**

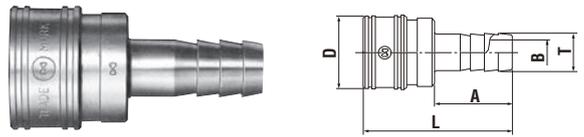

| Model | Application (Hose) | Mass (g)         |       |                 | Dimensions (mm) |      |    |      |    |  |
|-------|--------------------|------------------|-------|-----------------|-----------------|------|----|------|----|--|
|       |                    | Steel            | Brass | Stainless steel | L               | øD   | A  | øT   | øB |  |
| 1TSH  | 1/8"               | 24 <sup>+1</sup> | 26    | 24              | 40              | 17.5 | 20 | 6.5  | 3  |  |
| 2TSH  | 1/4"               | 63               | 69    | 64              | 55              | 24   | 29 | 8    | 5  |  |
| 3TSH  | 3/8"               | 95               | 104   | 96              | 62              | 28   | 32 | 11   | 7  |  |
| 4TSH  | 1/2"               | 176              | 192   | 177             | 74              | 35   | 39 | 15   | 10 |  |
| 6TSH  | 3/4"               | 348              | 379   | 350             | 90              | 45   | 48 | 21   | 15 |  |
| 8TSH  | 1"                 | 570              | 605   | 570             | 102             | 58   | 57 | 27   | 19 |  |
| 10TSH | 1 1/4"             | 840              | 910   | 850             | 117             | 69   | 70 | 34.5 | 26 |  |
| 12TSH | 1 1/2"             | 1,060            | 1,140 | 1,070           | 128             | 75   | 75 | 41   | 32 |  |
| 16TSH | 2"                 | 2,095            | 2,251 | 2,100           | 141             | 98   | 80 | 54   | 40 |  |

**Socket TSM type (Male thread)**

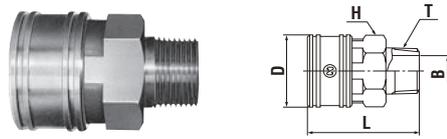


| Model | Application | Mass (g)         |       |                 | Dimensions (mm) |      |          |         |     |  |
|-------|-------------|------------------|-------|-----------------|-----------------|------|----------|---------|-----|--|
|       |             | Steel            | Brass | Stainless steel | L               | øD   | H(WAF)   | T       | øB  |  |
| 1TSM  | Rc 1/8      | 25 <sup>+1</sup> | 27    | 26              | 30              | 17.5 | Hex.14   | R 1/8   | 4.5 |  |
| 2TSM  | Rc 1/4      | 66               | 72    | 67              | 42              | 24   | Hex.19   | R 1/4   | 6.5 |  |
| 3TSM  | Rc 3/8      | 99               | 108   | 100             | 46              | 28   | Hex.23   | R 3/8   | 10  |  |
| 4TSM  | Rc 1/2      | 178              | 194   | 179             | 56              | 35   | Hex.29   | R 1/2   | 13  |  |
| 6TSM  | Rc 3/4      | 343              | 374   | 346             | 65              | 45   | Hex.38   | R 3/4   | 18  |  |
| 8TSM  | Rc 1        | 629              | 665   | 633             | 76              | 58   | Hex.50   | R 1     | 24  |  |
| 10TSM | Rc 1 1/4    | 950              | 1,010 | 955             | 86              | 69   | 54 x ø64 | R 1 1/4 | 32  |  |
| 12TSM | Rc 1 1/2    | 1,180            | 1,275 | 1,190           | 95              | 75   | 58 x ø70 | R 1 1/2 | 38  |  |
| 16TSM | Rc 2        | 2,040            | 2,190 | 2,060           | 108             | 98   | 77 x ø82 | R 2     | 49  |  |

**Socket TSF type (Female thread)**



| Model | Application | Mass (g)         |       |                 | Dimensions (mm) |      |          |          |
|-------|-------------|------------------|-------|-----------------|-----------------|------|----------|----------|
|       |             | Steel            | Brass | Stainless steel | L               | øD   | H(WAF)   | T        |
| 1TSF  | R 1/8       | 25 <sup>+1</sup> | 27    | 25              | 27              | 17.5 | Hex.14   | Rc 1/8   |
| 2TSF  | R 1/4       | 57               | 62    | 57              | 32              | 24   | Hex.19   | Rc 1/4   |
| 3TSF  | R 3/8       | 83               | 90    | 83              | 35              | 28   | Hex.23   | Rc 3/8   |
| 4TSF  | R 1/2       | 153              | 167   | 154             | 42              | 35   | Hex.29   | Rc 1/2   |
| 6TSF  | R 3/4       | 288              | 314   | 289             | 48              | 45   | Hex.38   | Rc 3/4   |
| 8TSF  | R 1         | 575              | 607   | 575             | 59              | 58   | Hex.50   | Rc 1     |
| 10TSF | R 1 1/4     | 821              | 888   | 825             | 64              | 69   | 54 x ø64 | Rc 1 1/4 |
| 12TSF | R 1 1/2     | 1,003            | 1,064 | 1,005           | 71              | 75   | 58 x ø70 | Rc 1 1/2 |
| 16TSF | R 2         | 1,765            | 1,880 | 1,770           | 80              | 98   | 77 x ø82 | Rc 2     |

**Socket TSN type (For braided hose connection)**

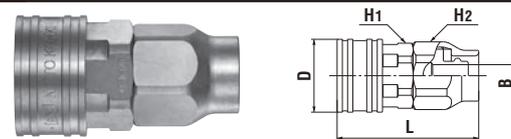

| Model    | Application (Hose) :5 |                          | Mass (g) |                 | Dimensions (mm) |    |         |         |        |    |
|----------|-----------------------|--------------------------|----------|-----------------|-----------------|----|---------|---------|--------|----|
|          | Size (mm)             | Hose wall thickness (mm) | Brass    | Stainless steel | L               | øD | H1(WAF) | H2(WAF) | øB     |    |
|          |                       |                          |          |                 |                 |    |         |         |        |    |
| 2TSN-60  | ø6 x ø11              | 2.5±0.25                 | 91       | 84              | 49              | 24 | Hex.19  | Hex.19  | 5.5    |    |
| 3TSN-90  | ø9 x ø15              | 3±0.3                    | 139      | 129             | 54              | 28 | Hex.23  | Hex.24  | 8.5    |    |
| 4TSN-120 | ø12 x ø18             |                          | 222      | 206             | 62              | 35 | Hex.29  | Hex.27  | 11     |    |
| 4TSN-150 | ø15 x ø22             |                          | 3.5±0.35 | 255             | 237             | 70 | 35      | Hex.30  | Hex.30 | 13 |
| 6TSN-190 | ø19 x ø26             | 435                      |          | 408             | 81              | 45 | Hex.38  | Hex.35  | 17     |    |
| 8TSN-250 | ø25 x ø33             | 4±0.4                    | 677      | 633             | 93              | 58 | Hex.50  | Hex.41  | 23     |    |

\*1 : 1TSP steel is a made-to-order item. \*2 : Stainless steel: 54 x ø60 \*3 : Stainless steel: 54 x ø69 \*4 : Stainless steel: 58 x ø65 \*5 : Braided hoses for TPN type and TSN type should be made of soft PVC and woven by reinforcement thread. Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.

For Low Pressure


# TSP Cupla Socket with Ball Valve

For low pressure general applications


|  |   |   |   |   |   |
|--|---|---|---|---|---|
| <b>Working pressure</b>  | <b>Valve structure</b>  | <b>Applicable fluids</b>  |   |   |   |
| <br>1.0 MPa<br>(10 kgf/cm <sup>2</sup> ) | <br>One-way shut-off |  |  |  |  |
|  |   | Water   | Hydraulic oil   | Air   | Gas   |

**One-piece design of TSP Cupla socket and ball valve. Sleeve stopper mechanism prevent accidental disconnection during connection. (when the valve is open.)**

- Socket valve can be opened and shut off while socket and plug are connected.
- Ball valve design provides for high flow rate.
- A high viscosity fluid such as grease can be applied.

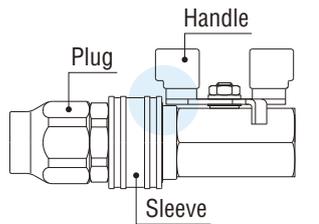

*The handle of the ball valve locks the sleeve to prevent disconnection of the plug during use.*

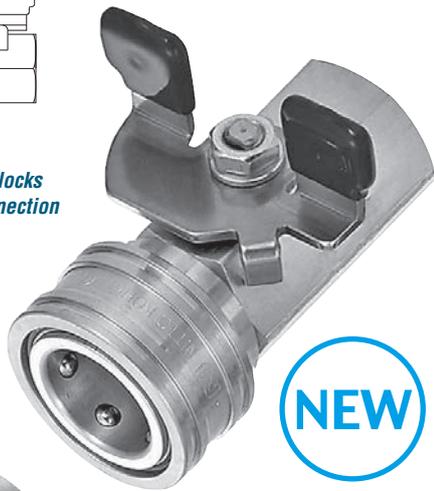

*Interchangeable with standard TSP Cupla plug in the same size.*



| Specifications            |                     |                     |         |                           |         |
|---------------------------|---------------------|---------------------|---------|---------------------------|---------|
| Model                     | BV-2TSF             | BV-3TSF             | BV-4TSF | BV-6TSF                   | BV-8TSF |
| Size (Thread)             | 1/4"                | 3/8"                | 1/2"    | 3/4"                      | 1"      |
| Body material             | Brass               |                     |         |                           |         |
| Working pressure          | MPa                 | 1.0                 |         |                           |         |
|                           | kgf/cm <sup>2</sup> | 10                  |         |                           |         |
|                           | bar                 | 10                  |         |                           |         |
|                           | PSI                 | 145                 |         |                           |         |
| Seal material             |                     | Seal material       | Mark    | Working temperature range |         |
| Working temperature range | Cupla Part          | Fluoro rubber       | FKM     | -5°C to +120°C            |         |
|                           | Ball Valve Part     | Fluoropolymer resin | -       |                           |         |

| Max. Tightening Torque |         |          |          |          | Nm (kgf·cm) |
|------------------------|---------|----------|----------|----------|-------------|
| Model                  | BV-2TSF | BV-3TSF  | BV-4TSF  | BV-6TSF  | BV-8TSF     |
| Torque                 | 9 {92}  | 12 {122} | 30 {306} | 50 {510} | 65 {663}    |

**Flow Direction**


Fluid may flow in either direction from plug or from socket side when coupled.

**Interchangeability**  
Can be connected with the plug for TSP Cupla in the same size.

| Min. Cross-Sectional Area |         |         |         |         | (mm <sup>2</sup> ) |
|---------------------------|---------|---------|---------|---------|--------------------|
| Model                     | BV-2TSF | BV-3TSF | BV-4TSF | BV-6TSF | BV-8TSF            |
| Min. cross-sectional area | 19.6    | 44.1    | 63.6    | 122     | 201                |

\* Value of BV type only. The minimum cross-sectional area may vary depending upon the end configuration of the plug.

**Suitability for Vacuum**  
Not suitable for vacuum application in either connected or disconnected condition.

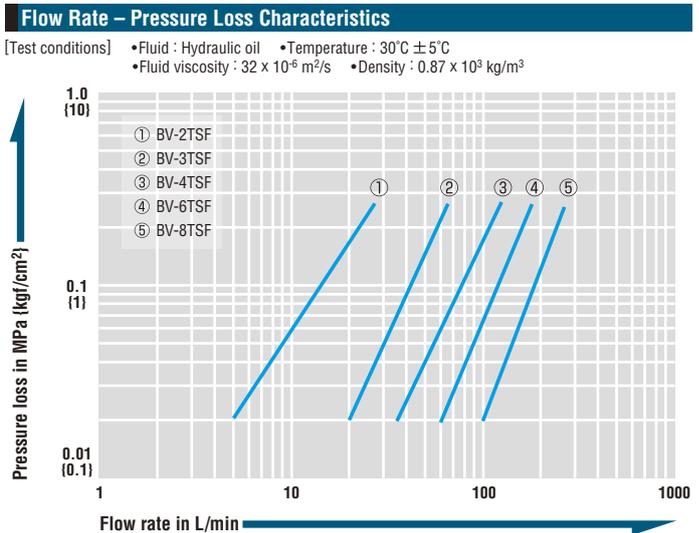

**Ball Valve Open**

**Sleeve is locked.**


**Ball Valve Shut**

**Sleeve is free.**

Models and Dimensions

WAF : WAF stands for width across flats.

Socket BV-TSF type (Female thread)

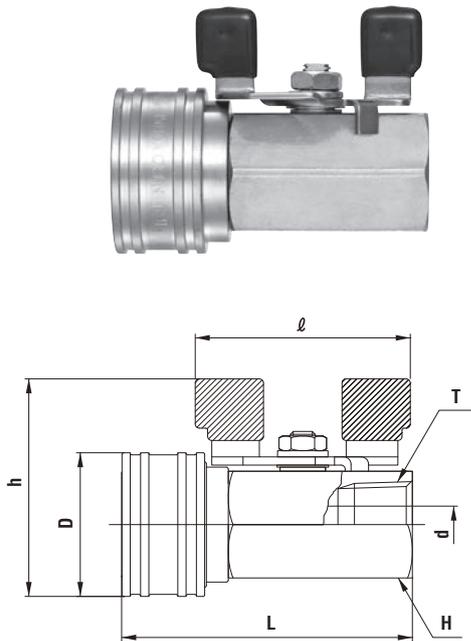


| Model   | Application | Mass (g) | Dimensions (mm) |        |    |        |        |      |        |
|---------|-------------|----------|-----------------|--------|----|--------|--------|------|--------|
|         |             |          | L               | h      | σD | H(WAF) | T      | σd   | ℓ      |
| BV-2TSF | R 1/4       | 104      | (52.5)          | (43)   | 24 | Hex.17 | Rc 1/4 | 5    | (38.5) |
| BV-3TSF | R 3/8       | 163      | (60.5)          | (47.5) | 28 | Hex.21 | Rc 3/8 | 7.5  | (44)   |
| BV-4TSF | R 1/2       | 270      | (70.5)          | (53)   | 35 | Hex.26 | Rc 1/2 | 9    | (52)   |
| BV-6TSF | R 3/4       | 491      | (83)            | (66)   | 45 | Hex.32 | Rc 3/4 | 12.5 | (60.5) |
| BV-8TSF | R 1         | 904      | (102.5)         | (77)   | 58 | Hex.41 | Rc 1   | 16   | (74.5) |


Application

TSP Cupla Socket with Ball Valve

TSP Cupla Socket + Commercially Available Ball Valve

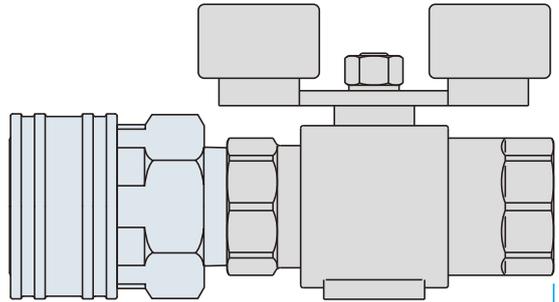

Overall length reduced by around 30%

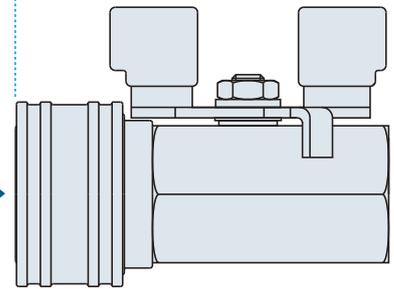

Compact and enhanced sealing design

Connection part between a Standard TSP Cupla socket and a commercially available ball valve is eliminated for enhanced sealing and the overall length is reduced by around 30%.

# For Medium Pressure SP Cupla Type A

For medium pressure  
general applications

Working pressure

1.5 to 7.5

1.5 to 7.5 MPa  
(15 to 76 kgf/cm<sup>2</sup>)

Valve structure



Two-way shut-off

Applicable fluids



Water



Hydraulic oil



Chemicals



Air



Gas



Steam

Note: Depending on the temperature of steam/hot water, the heat may damage seal materials. Please contact one of our distributors.

Flow is  
increased up  
to **60%**  
for Model 6SP-A



High flow type SP Cupla is  
now released!  
Plugs with male thread end are  
newly added.

Type



## Specifications

| Body material             |                     | Brass                     |                  |                  |     | Stainless steel, Steel (Nickel-plated) |                  |                   |     |
|---------------------------|---------------------|---------------------------|------------------|------------------|-----|--|------------------|-------------------|-----|
| Size (Thread)             |                     | 1/8", 1/4"<br>3/8"        | 1/2", 3/4"<br>1" | 1 1/4"<br>1 1/2" | 2"  | 1/8", 1/4"<br>3/8"                     | 1/2", 3/4"<br>1" | 1 1/4"<br>1 1/2"  | 2"  |
| Working pressure          | MPa                 | 5.0                       | 3.0              | 2.0              | 1.5 | 7.5                                    | 4.5              | 3.0               | 2.0 |
|                           | kgf/cm <sup>2</sup> | 51                        | 31               | 20               | 15  | 76                                     | 46               | 31                | 20  |
|                           | bar                 | 50                        | 30               | 20               | 15  | 75                                     | 45               | 30                | 20  |
|                           | PSI                 | 725                       | 435              | 290              | 218 | 1090                                   | 653              | 435               | 290 |
| Seal material *           |                     | Seal material             |                  | Mark             |     | Working temperature range              |                  | Remarks           |     |
| Working temperature range |                     | Nitrile rubber            |                  | NBR (SG)         |     | -20°C to +80°C                         |                  | Standard material |     |
|                           |                     | Fluoro rubber             |                  | FKM (X-100)      |     | -20°C to +180°C                        |                  |                   |     |
|                           |                     | Ethylene-propylene rubber |                  | EPDM (EPT)       |     | -40°C to +150°C                        |                  |                   |     |

\* Plugs with male thread end mounting nitrile rubber or ethylene-propylene rubber are made-to-order items.

## Max. Tightening Torque

| Size (Thread) |                 | 1/8"      | 1/4"        | 3/8"        | 1/2"        | 3/4"        | 1"            | 1 1/4"        | 1 1/2"        | 2"            |
|---------------|-----------------|-----------|-------------|-------------|-------------|-------------|---------------|---------------|---------------|---------------|
| Torque        | Steel           | 9<br>(92) | 14<br>(143) | 22<br>(224) | 60<br>(612) | 90<br>(918) | 120<br>(1224) | 260<br>(2652) | 280<br>(2856) | 500<br>(5100) |
|               | Brass           | 5<br>(51) | 9<br>(92)   | 12<br>(122) | 30<br>(306) | 50<br>(510) | 65<br>(663)   | 150<br>(1530) | 180<br>(1836) | 260<br>(2652) |
|               | Stainless steel | 9<br>(92) | 14<br>(143) | 22<br>(224) | 60<br>(612) | 90<br>(918) | 120<br>(1224) | 260<br>(2652) | 280<br>(2856) | 500<br>(5100) |

Plug with male thread type is only available in brass.

## Flow Direction

Fluid may flow in either direction from plug or from socket side when coupled.



## Interchangeability

Different sizes are not interchangeable each other.  
Interchangeable with conventional SP Cupla in the same size.  
\* Interchangeable with SP-V Cuplas but take heed of flow rate.

## Min. Cross-Sectional Area

(mm<sup>2</sup>)

| Model                     | 1SP-A | 2SP-A | 3SP-A | 4SP-A | 6SP-A | 8SP-A | 10SP-A | 12SP-A | 16SP-A |
|---------------------------|-------|-------|-------|-------|-------|-------|--------|--------|--------|
| Min. Cross-sectional area | 14    | 26    | 51    | 73    | 178   | 229   | 395    | 553    | 803    |

## Suitability for Vacuum

1.3 x 10<sup>-1</sup> Pa [1 x 10<sup>-3</sup> mmHg]

| Socket only | Plug only | When connected |
|-------------|-----------|----------------|
| —           | —         | Operational    |

## Admixture of Air on Connection

Admixture of air may vary depending upon the usage conditions.

(mL)

| Model                   | 1SP-A | 2SP-A | 3SP-A | 4SP-A | 6SP-A | 8SP-A | 10SP-A | 12SP-A | 16SP-A |
|-------------------------|-------|-------|-------|-------|-------|-------|--------|--------|--------|
| Volume of air admixture | 0.6   | 1.1   | 2.7   | 3.9   | 11    | 25    | 29     | 45     | 84     |

## Volume of Spillage per Disconnection


Volume of spillage may vary depending upon the usage conditions.

(mL)

| Model              | 1SP-A | 2SP-A | 3SP-A | 4SP-A | 6SP-A | 8SP-A | 10SP-A | 12SP-A | 16SP-A |
|--------------------|-------|-------|-------|-------|-------|-------|--------|--------|--------|
| Volume of spillage | 0.4   | 0.8   | 2.1   | 3.4   | 9.5   | 15    | 29     | 45     | 84     |

## Flow Rate – Pressure Loss Characteristics

[Test conditions] • Fluid : Water • Temperature: 25°C ± 5°C

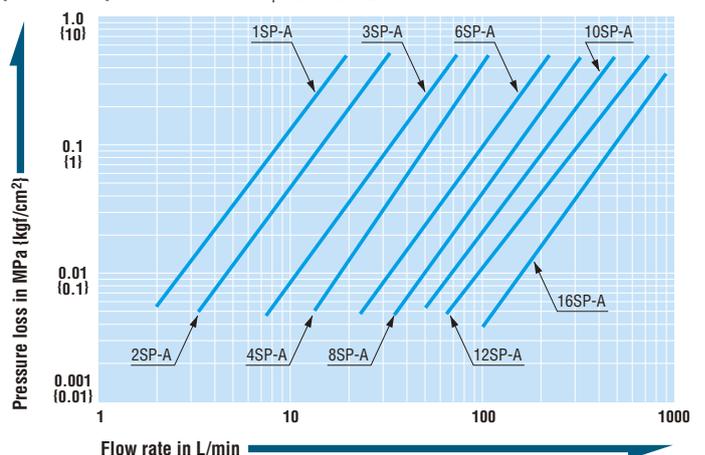

## Increased flow volume ratio

Compared with conventional SP Cupla, the flow volume is increased by 7 to 64%.

## New self-aligned valve design provides better seal

The new design of the valve head makes smooth self-aligned return to its original position when socket and plug are disconnected. This mechanism enhances safety sealing of individual socket or plug when disconnected (1 to 8SP-A Type).



## Smooth and prompt connection

The plug with the new body design enables smooth and prompt connection.

## Adoption of stainless steel SUS304

SUS304 is adopted as the standard body material of stainless steel good for the applications that require high reliability.

\*Stainless steel complying with other standard, equivalent to SUS304, may be used for some parts.

## Interchangeability

Interchangeability of SP Type A with conventional SP is guaranteed, while no interchangeability with different sizes.

## Flow characteristics

Regardless of the body materials, the flow characteristics remain the same.

## Sleeve stopper (Optional. See the pages of Accessories for details)

A sleeve snap-in stopper securely prevents accidental disconnection.

## Products complied to RoHS requirements

Nickel plating is applied for the surface treatment of the steel body to reduce the load on environment.

### Models and Dimensions

WAF : WAF stands for width across flats.

| Plug  |             | Female thread |       |                 |                 |    |           |          |
|-------|-------------|---------------|-------|-----------------|-----------------|----|-----------|----------|
|       |             |               |       |                 |                 |    |           |          |
| Model | Application | Mass (g)      |       |                 | Dimensions (mm) |    |           |          |
|       |             | Steel         | Brass | Stainless steel | L               | C  | H(WAF)    | T        |
| 1P-A  | R 1/8       | 17 *1         | 19    | 17              | 29              | 19 | Hex.14    | Rc 1/8   |
| 2P-A  | R 1/4       | 32            | 34    | 32              | 36              | 22 | Hex.17    | Rc 1/4   |
| 3P-A  | R 3/8       | 56            | 61    | 56              | 40              | 25 | Hex.21    | Rc 3/8   |
| 4P-A  | R 1/2       | 112           | 121   | 112             | 44              | 28 | Hex.29    | Rc 1/2   |
| 6P-A  | R 3/4       | 190           | 205   | 190             | 52              | 36 | Hex.35    | Rc 3/4   |
| 8P-A  | R 1         | 311           | 333   | 310             | 62              | 40 | Hex.41    | Rc 1     |
| 10P-A | R 1 1/4     | 590           | 630   | 620             | 70              | 45 | Hex.54 *2 | Rc 1 1/4 |
| 12P-A | R 1 1/2     | 870           | 920   | 880             | 75              | 49 | Hex.63 *3 | Rc 1 1/2 |
| 16P-A | R 2         | 1540          | 1640  | 1560            | 80              | 52 | 77 x ø84  | Rc 2     |

| Socket |             | Female thread |       |                 |                 |     |        |          |
|--------|-------------|---------------|-------|-----------------|-----------------|-----|--------|----------|
|        |             |               |       |                 |                 |     |        |          |
| Model  | Application | Mass (g)      |       |                 | Dimensions (mm) |     |        |          |
|        |             | Steel         | Brass | Stainless steel | L               | øD  | H(WAF) | T        |
| 1S-A   | R 1/8       | 73 *1         | 79    | 75              | 48              | 24  | 14     | Rc 1/8   |
| 2S-A   | R 1/4       | 119           | 128   | 130             | 58              | 28  | 19     | Rc 1/4   |
| 3S-A   | R 3/8       | 187           | 202   | 193             | 65              | 35  | 21     | Rc 3/8   |
| 4S-A   | R 1/2       | 368           | 397   | 391             | 72              | 45  | 29     | Rc 1/2   |
| 6S-A   | R 3/4       | 639           | 686   | 645             | 88              | 55  | 35     | Rc 3/4   |
| 8S-A   | R 1         | 951           | 1024  | 962             | 102             | 65  | 41     | Rc 1     |
| 10S-A  | R 1 1/4     | 1430          | 1520  | 1440            | 115             | 77  | 54     | Rc 1 1/4 |
| 12S-A  | R 1 1/2     | 2130          | 2270  | 2150            | 124             | 88  | 63     | Rc 1 1/2 |
| 16S-A  | R 2         | 3280          | 3510  | 3310            | 132             | 108 | 77     | Rc 2     |

\* The photos above show steel coupling. \* The appearance of stainless steel coupling (SUS304) differs slightly from that shown in the photos above.

\*1 1P-A and 1S-A are made-to-order items. \*2 Stainless steel: 54 x ø59 \*3 Stainless steel: 63 x ø67

| Plug   |             | Male thread |    |       |                 |       |  |  |
|--------|-------------|-------------|----|-------|-----------------|-------|--|--|
|        |             |             |    |       |                 |       |  |  |
| Model  | Application | Mass (g)    |    |       | Dimensions (mm) |       |  |  |
|        |             | Brass       | L  | C     | H(WAF)          | T     |  |  |
| 1P-M-A | Rc 1/8      | 24          | 40 | 19    | Hex.14          | R 1/8 |  |  |
| 2P-M-A | Rc 1/4      | 41          | 44 | 22    | Hex.17          | R 1/4 |  |  |
| 3P-M-A | Rc 3/8      | 71          | 51 | 25    | Hex.21          | R 3/8 |  |  |
| 4P-M-A | Rc 1/2      | 149         | 62 | 28    | Hex.27          | R 1/2 |  |  |
| 6P-M-A | Rc 3/4      | 295         | 75 | 36    | Hex.35          | R 3/4 |  |  |
| 8P-M-A | Rc 1        | 406         | 83 | 40 *4 | Hex.41          | R 1   |  |  |

\*4 Model 8P-M-A indicates an approximate insertion length because there is no difference in level on the body.

### Accessory

## Cupla Adapter for Braided Hose Connection

Can be screwed into Cuplas with female threads, 3/8", 1/2", 3/4"



See page 139 for the details.

Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.

For Medium Pressure

# Zerospill Cupla

Low spill type for medium pressure use

|  |   |                          |  |  |  |
|--|---|--------------------------|--|--|--|
| <b>Working pressure</b><br>3.5<br>3.5 MPa<br>(35 kgf/cm <sup>2</sup> ) | <b>Valve structure</b><br>Two-way shut-off<br>(Non-Spill) | <b>Applicable fluids</b> |  |  |  |
|  |   |                          |  |  |  |

## Unique seal design reduces both liquid spillage and air ingress.

- New valve design offers smooth zero-friction movement.
- Push to connect design.
- The variety of body materials, sizes and end configurations has been standardized to comply with wide range of applications.
- Automatic shut-off valves in both socket and plug prevent fluid spill out on disconnection.



| Specifications            |                           |                                  |                           |                   |
|---------------------------|---------------------------|----------------------------------|---------------------------|-------------------|
| Body material             |                           | Brass, Stainless steel (SUS 304) |                           |                   |
| Applicable fluids         |                           | Water, Hydraulic Oil, Air, Gas   |                           |                   |
| Size (Thread)             |                           | 1/4", 3/8", 1/2", 3/4", 1"       |                           |                   |
| Working pressure          | MPa                       | 3.5                              |                           |                   |
|                           | kgf/cm <sup>2</sup>       | 35                               |                           |                   |
|                           | bar                       | 35                               |                           |                   |
|                           | PSI                       | 508                              |                           |                   |
| Seal material             | Seal material             | Mark                             | Working temperature range | Remarks           |
|                           | Nitrile rubber            | NBR (SG)                         | -20°C to +80°C            | Standard material |
|                           | Fluoro rubber             | FKM (X-100)                      | -20°C to +180°C           | Standard material |
| Working temperature range | Ethylene-propylene rubber | EPDM (EPT)                       | -40°C to +150°C           | Standard material |

Note: Applicable fluids depend on the body material and seal material.  
Acceptable working temperature range depends on operating conditions.

| Max. Tightening Torque |                 | Nm {kgf·cm} |          |          |          |            |
|------------------------|-----------------|-------------|----------|----------|----------|------------|
| Size (Thread)          |                 | 1/4"        | 3/8"     | 1/2"     | 3/4"     | 1"         |
| Torque                 | Brass           | 9 {92}      | 12 {122} | 30 {306} | 50 {510} | 65 {663}   |
|                        | Stainless steel | 14 {143}    | 22 {224} | 60 {612} | 90 {918} | 120 {1224} |

### Flow Direction

Fluid may flow in either direction from plug or from socket side when coupled.

### Interchangeability

Different size socket and plug cannot be connected to each other.

| Min. Cross-Sectional Area |         | (mm <sup>2</sup> ) |         |         |         |  |
|---------------------------|---------|--------------------|---------|---------|---------|--|
| Model                     | ZEL-2SP | ZEL-3SP            | ZEL-4SP | ZEL-6SP | ZEL-8SP |  |
| Min. cross-sectional area | 31      | 60.5               | 86.5    | 160.6   | 188.7   |  |

| Suitability for Vacuum |           | 1.3 x 10 <sup>-1</sup> Pa {1 x 10 <sup>-3</sup> mmHg} |  |  |
|------------------------|-----------|---|--|--|
| Socket only            | Plug only | When connected  |  |  |
| —                      | —         | Operational   |  |  |


| Admixture of Air on Connection |         | Admixture of air may vary depending upon the usage conditions. (mL) |         |         |         |  |
|--------------------------------|---------|---|---------|---------|---------|--|
| Model                          | ZEL-2SP | ZEL-3SP   | ZEL-4SP | ZEL-6SP | ZEL-8SP |  |
| Volume of air admixture        | 0.16    | 0.21  | 0.37    | 1.12    | 1.52    |  |

| Volume of Spillage per Disconnection |         | Volume of spillage may vary depending upon the usage conditions. (mL) |         |         |         |  |
|--------------------------------------|---------|---|---------|---------|---------|--|
| Model                                | ZEL-2SP | ZEL-3SP   | ZEL-4SP | ZEL-6SP | ZEL-8SP |  |
| Volume of spillage                   | 0.06    | 0.12  | 0.20    | 0.43    | 0.55    |  |

\* Repeated connections and disconnections of Cuplas or the use of fluids with low viscosity may cause some spillage.


### Flow Rate – Pressure Loss Characteristics

[Test conditions] • Fluid : Water • Temperature : 25°C to 27°C

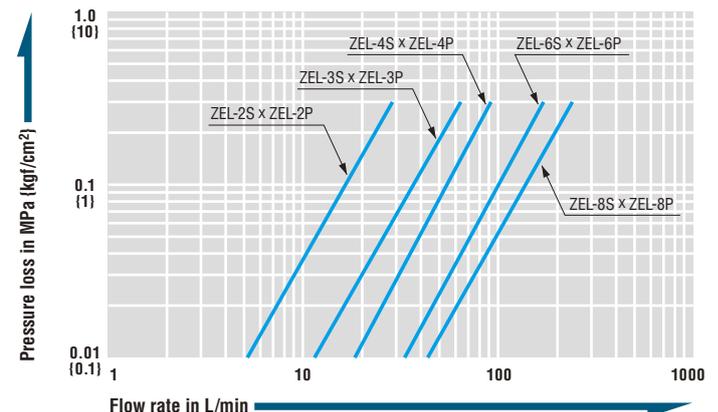


Models and Dimensions

**Plug Female thread**

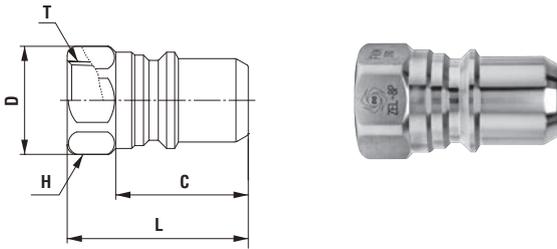

| Model  | Application | Mass (g) |                 | Dimensions (mm) |      |      |         |        |
|--------|-------------|----------|-----------------|-----------------|------|------|---------|--------|
|        |             | Brass    | Stainless steel | L               | C    | øD   | H (WAF) | T      |
| ZEL-2P | R 1/4       | 34       | 32              | 39              | 26.1 | 19   | Hex.17  | Rc 1/4 |
| ZEL-3P | R 3/8       | 67       | 63              | 44.5            | 32   | 25   | Hex.23  | Rc 3/8 |
| ZEL-4P | R 1/2       | 117      | 109             | 52.5            | 36.8 | 32   | Hex.29  | Rc 1/2 |
| ZEL-6P | R 3/4       | 264      | 248             | 68.5            | 48   | 39.5 | Hex.36  | Rc 3/4 |
| ZEL-8P | R 1         | 359      | 339             | 76.5            | 56   | 46   | Hex.42  | Rc 1   |

**Socket Female thread**

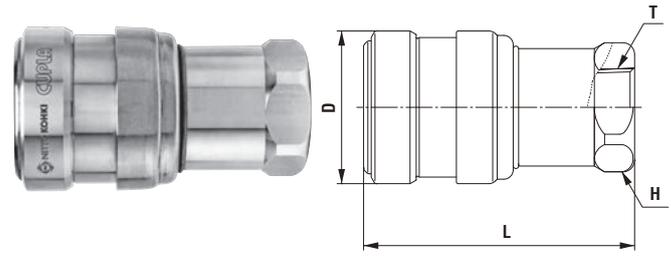

| Model  | Application | Mass (g) |                 | Dimensions (mm) |    |         |        |
|--------|-------------|----------|-----------------|-----------------|----|---------|--------|
|        |             | Brass    | Stainless steel | L               | øD | H (WAF) | T      |
| ZEL-2S | R 1/4       | 133      | 125             | (56)            | 28 | Hex.21  | Rc 1/4 |
| ZEL-3S | R 3/8       | 255      | 239             | (66)            | 35 | Hex.27  | Rc 3/8 |
| ZEL-4S | R 1/2       | 404      | 382             | (76)            | 42 | Hex.32  | Rc 1/2 |
| ZEL-6S | R 3/4       | 829      | 784             | (95.5)          | 55 | Hex.42  | Rc 3/4 |
| ZEL-8S | R 1         | 1406     | 1326            | (114.5)         | 65 | Hex.50  | Rc 1   |

\* The photos above show stainless steel model ZEL-8P and ZEL-8S. The profiles of brass couplings are the same as those of the stainless steel couplings.

# Main Features


## Unique seal design reduces both liquid spillage and air ingress

### To compare with Nitto SP Cupla Type A.

**Volume of spillage:**  
about 96% less vs SP Cupla Type A

**Volume of air ingress:**  
about 94% less vs SP Cupla Type A


**SP Cupla Type A**

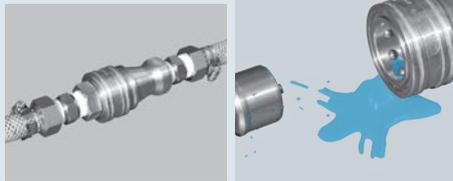

Connected

Disconnected

**ZEROSPILL Cupla**

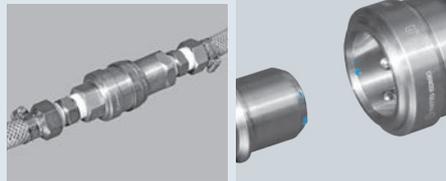

Connected

Disconnected



\*blue colored water is used to show volume of spillage clearly.

## Reliable zero friction valve

New valve design offers smooth zero-friction movement resulting in reduced chance of malfunction caused by deterioration of valve parts.

## Push-to-connect design One-hand easy operation

Just push the plug into the socket for simple and secure connection. This reduces connection time and improves efficiency.



Just push the plug into the socket

Simple and secure connection

**Accessory**

## Cupla Adapter for Braided Hose Connection

Can be screwed into Cuplas with female threads, 3/8", 1/2", 3/4"



See page 139 for the details.

For High Pressure

# HSP Cupla

For hydraulic pressure from 14.0 to 20.6 MPa {142 to 210 kgf/cm<sup>2</sup>}

Working pressure



Valve structure




Applicable fluids



**Special steel body is tough against vibration and impact! Male and female thread end configurations are available. Low pressure loss characteristic suits hydraulic equipment applications.**

- Quenched special steel body!  
Powerful impact resistance, especially against impulses.
- Automatic shut-off valves in both socket and plug prevent fluid spill out on disconnection. Easy to handle.
- In addition to conventional female thread type, male thread types (male tapered thread, male parallel thread with 30° flare, and male parallel thread with 30° cone-seat) are newly added. Male thread types are designed especially for direct connection to hydraulic power units effectively.
- Male parallel thread type complies with both metal seal and O-ring seal. (In case of O-ring seal, O-rings available in the market can be used.)
- Optional HSP-DC Cuplas are available for die-casting machine applications with severe pressure variation.
- The overall length of male thread type is shorter than that of female thread type plus conversion nipple available in the market.
- PL type (Safety sleeve lock type) for 2HS to 8HS (except 66HS) with female thread is also available as standard.

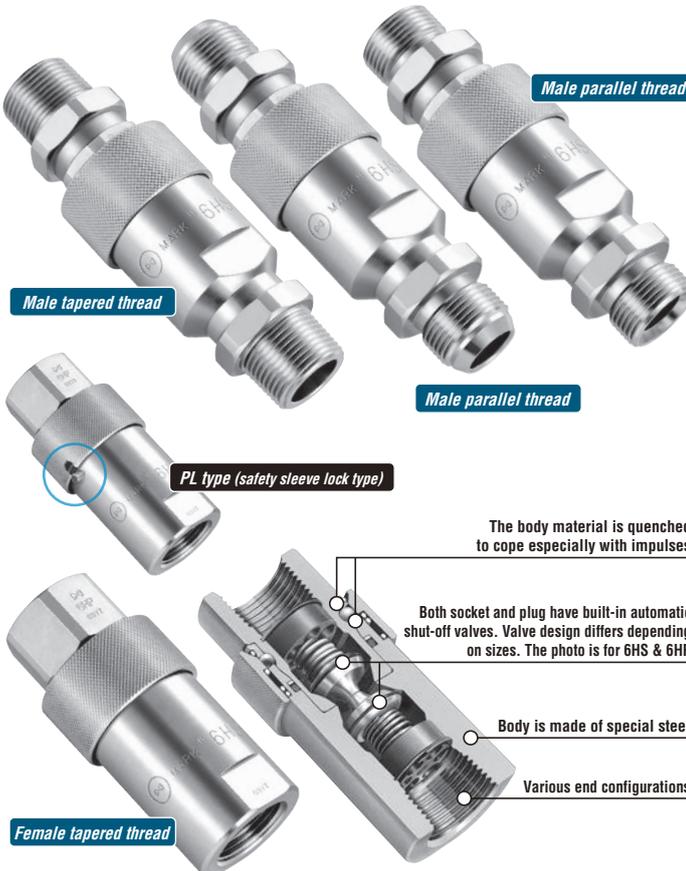

The body material is quenched to cope especially with impulses

Both socket and plug have built-in automatic shut-off valves. Valve design differs depending on sizes. The photo is for 6HS & 6HP

Body is made of special steel

Various end configurations

| Specifications            |                               |                 |          |                           |
|---------------------------|-------------------------------|-----------------|----------|---------------------------|
| Body material             | Special steel (Nickel-plated) |                 |          |                           |
| Size (Thread)             | 1/4", 3/8", 1/2", 3/4", 1"    | 1 1/4", 1 1/2"  | 2"       |                           |
| Working pressure          | MPa                           | 20.6            | 18.0     | 14.0                      |
|                           | kgf/cm <sup>2</sup>           | 210             | 183      | 142                       |
|                           | bar                           | 206             | 180      | 140                       |
|                           | PSI                           | 2990            | 2610     | 2030                      |
| Seal material             | Nitrile rubber                | Fluoro rubber   | Mark     | Working temperature range |
| Working temperature range | -20°C to +80°C                | -20°C to +180°C | NBR (SG) | FKM (X-100)               |
|                           |                               |                 |          | Remarks                   |
|                           |                               |                 |          | Standard material         |
|                           |                               |                 |          | Available on request      |

| Max. Tightening Torque |                      | Nm (kgf·cm) |          |          |            |            |            |            |            |
|------------------------|----------------------|-------------|----------|----------|------------|------------|------------|------------|------------|
| Size (Thread)          |                      | 1/4"        | 3/8"     | 1/2"     | 3/4"       | 1"         | 1 1/4"     | 1 1/2"     | 2"         |
| Torque                 | Female thread        | 28 (286)    | 45 (459) | 90 (918) | 100 (1020) | 180 (1836) | 290 (2958) | 350 (3570) | 500 (5100) |
|                        | Male taper thread    | 28 (286)    | 45 (459) | 90 (918) | 100 (1020) | —          | —          | —          | —          |
|                        | Parallel male thread | 25 (255)    | 35 (357) | 60 (612) | 120 (1224) | —          | —          | —          | —          |




**Interchangeability**  
4HSP with 6HSP or 10HSP with 12HSP can be connected each other. Other combinations of different sizes are not connectable.

| Min. Cross-Sectional Area | (mm <sup>2</sup> ) |      |      |      |       |      |       |       |       |  |
|---------------------------|--------------------|------|------|------|-------|------|-------|-------|-------|--|
| Model                     | 2HSP               | 3HSP | 4HSP | 6HSP | 66HSP | 8HSP | 10HSP | 12HSP | 16HSP |  |
| Min. cross-sectional area | 21                 | 37   | 77   | 77   | 145   | 203  | 595   | 595   | 1084  |  |

| Suitability for Vacuum | 1.3 x 10 <sup>-1</sup> Pa (1 x 10 <sup>-3</sup> mmHg) |           |                |
|------------------------|---|-----------|----------------|
| Socket only            | —   | Plug only | —              |
|                        |   |           | When connected |
|                        |   |           | Operational    |

| Admixture of Air on Connection | Admixture of air may vary depending upon the usage conditions. (mL) |      |      |      |       |      |       |       |       |  |
|--------------------------------|---|------|------|------|-------|------|-------|-------|-------|--|
| Model                          | 2HSP  | 3HSP | 4HSP | 6HSP | 66HSP | 8HSP | 10HSP | 12HSP | 16HSP |  |
| Volume of air                  | 0.7   | 1.9  | 3.5  | 3.5  | 8.2   | 12.4 | 44    | 44    | 156   |  |

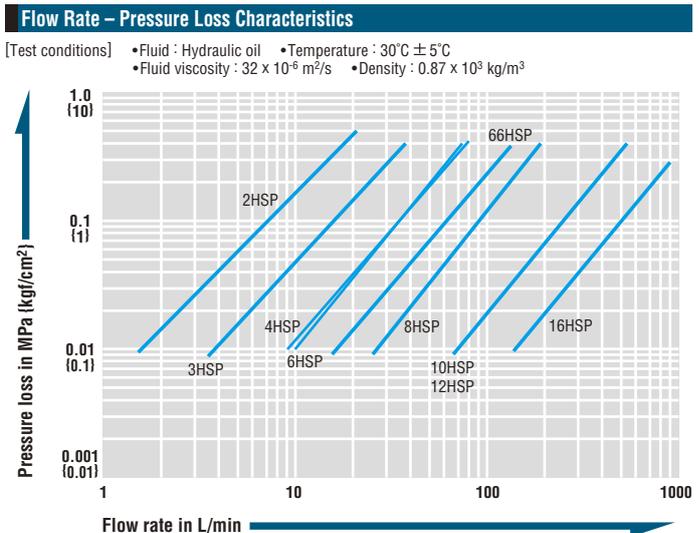


The flow volume of male thread type is increased by 5 to 10% compared with that of female thread type with conversion nipple.

**⚠ Precautions for use**  
There is no interchangeability between HSP Cupla and 210 Cupla or 280 Cupla. Do not connect to each other even if sizes are similar.

Models and Dimensions


Product appearance may vary by size. / WAF : WAF stands for width across flats.

**Plug HP type (Female tapered thread)**

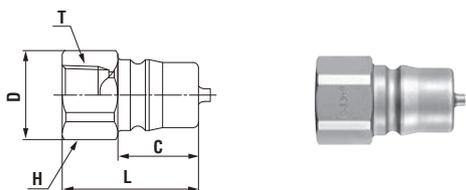


| Model | Application | Mass (g) | Dimensions (mm) |      |      |        |          |
|-------|-------------|----------|-----------------|------|------|--------|----------|
|       |             |          | L               | øD   | C    | H(WAF) | T        |
| 2HP   | R 1/4       | 40       | 32              | 20.5 | 17.5 | Hex.19 | Rc 1/4   |
| 3HP   | R 3/8       | 68       | 38              | 25   | 22.5 | Hex.23 | Rc 3/8   |
| 4HP   | R 1/2       | 124      | 44              | 32   | 27.5 | Hex.29 | Rc 1/2   |
| 6HP   | R 3/4       | 148      | 50              | 35   | 27.5 | Hex.32 | Rc 3/4   |
| 66HP  | R 3/4       | 232      | 51              | 40   | 28   | 35     | Rc 3/4   |
| 8HP   | R 1         | 361      | 61              | 47   | 36   | 41     | Rc 1     |
| 10HP  | R 1 1/4     | 886      | 80              | 64   | 58   | 58     | Rc 1 1/4 |
| 12HP  | R 1 1/2     | 810      | 80              | 64   | 58   | 58     | Rc 1 1/2 |
| 16HP  | R 2         | 3,307    | 115             | 100  | 83   | 90     | Rc 2     |

**Socket HS type (Female tapered thread)**

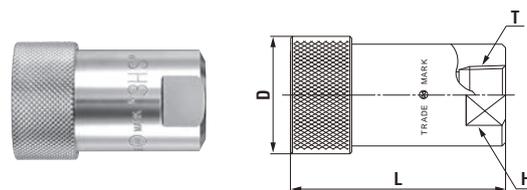


| Model | Application | Mass (g) | Dimensions (mm) |        |        |          |
|-------|-------------|----------|-----------------|--------|--------|----------|
|       |             |          | L               | øD     | H(WAF) | T        |
| 2HS   | R 1/4       | 134      | 49              | (27.5) | 19     | Rc 1/4   |
| 3HS   | R 3/8       | 226      | 60              | (33)   | 23     | Rc 3/8   |
| 4HS   | R 1/2       | 485      | 72              | (43)   | 35     | Rc 1/2   |
| 6HS   | R 3/4       | 460      | 72              | (43)   | 35     | Rc 3/4   |
| 66HS  | R 3/4       | 569      | 78.5            | (47)   | 35     | Rc 3/4   |
| 8HS   | R 1         | 1,042    | 93              | (58)   | 46     | Rc 1     |
| 10HS  | R 1 1/4     | 2,586    | 138             | 87     | 58     | Rc 1 1/4 |
| 12HS  | R 1 1/2     | 2,510    | 138             | 87     | 58     | Rc 1 1/2 |
| 16HS  | R 2         | 7,286    | 198             | 123    | 80     | Rc 2     |

**Plug HP-R type (Male tapered thread)**

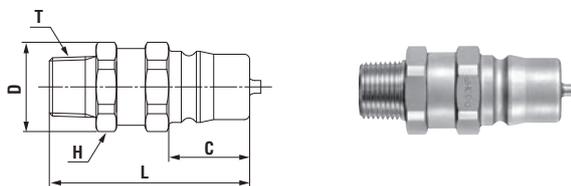


| Model | Application | Mass (g) | Dimensions (mm) |    |      |        |       |
|-------|-------------|----------|-----------------|----|------|--------|-------|
|       |             |          | L               | øD | C    | H(WAF) | T     |
| 2HP-R | Rc 1/4      | 60       | (49)            | 21 | 17.5 | Hex.19 | R 1/4 |
| 3HP-R | Rc 3/8      | 102      | (55.5)          | 25 | 22.5 | Hex.23 | R 3/8 |
| 4HP-R | Rc 1/2      | 171      | (63)            | 31 | 27.5 | Hex.29 | R 1/2 |
| 6HP-R | Rc 3/4      | 197      | (66)            | 35 | 27.5 | Hex.32 | R 3/4 |

**Socket HS-R type (Male tapered thread)**

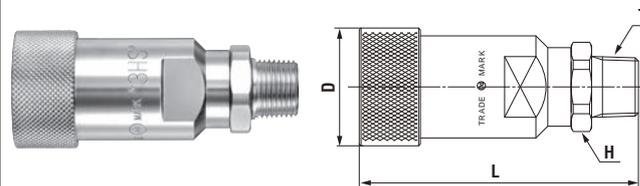


| Model | Application | Mass (g) | Dimensions (mm) |        |        |       |
|-------|-------------|----------|-----------------|--------|--------|-------|
|       |             |          | L               | øD     | H(WAF) | T     |
| 2HS-R | Rc 1/4      | 148      | (66)            | (27.5) | Hex.19 | R 1/4 |
| 3HS-R | Rc 3/8      | 245      | (77.5)          | (33)   | Hex.23 | R 3/8 |
| 4HS-R | Rc 1/2      | 466      | (90)            | (43)   | Hex.29 | R 1/2 |
| 6HS-R | Rc 3/4      | 493      | (93)            | (43)   | Hex.32 | R 3/4 |

**Plug HP-GP type (Male parallel thread with 30° flare)**

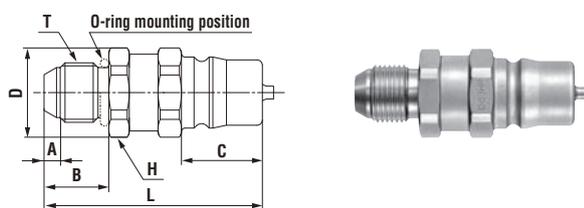


| Model  | Application* | Mass (g) | O-ring size | Dimensions (mm) |    |       |    |      |        |        |
|--------|--------------|----------|-------------|-----------------|----|-------|----|------|--------|--------|
|        |              |          |             | L               | øD | A     | B  | C    | H(WAF) | T      |
| 2HP-GP | G 1/4        | 62       | P-11        | (52.5)          | 21 | (4.5) | 16 | 17.5 | Hex.19 | G 1/4B |
| 3HP-GP | G 3/8        | 103      | P-14        | (60.5)          | 25 | (4.5) | 18 | 22.5 | Hex.23 | G 3/8B |
| 4HP-GP | G 1/2        | 173      | P-18        | (66)            | 31 | (5.5) | 20 | 27.5 | Hex.29 | G 1/2B |
| 6HP-GP | G 3/4        | 203      | P-24        | (69)            | 35 | (5.5) | 22 | 27.5 | Hex.32 | G 3/4B |

**Socket HS-GP type (Male parallel thread with 30° flare)**

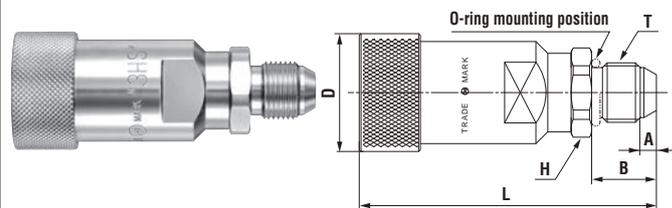


| Model  | Application* | Mass (g) | O-ring size | Dimensions (mm) |        |       |    |        |        |  |
|--------|--------------|----------|-------------|-----------------|--------|-------|----|--------|--------|--|
|        |              |          |             | L               | øD     | A     | B  | H(WAF) | T      |  |
| 2HS-GP | G 1/4        | 149      | P-11        | (69.5)          | (27.5) | (4.5) | 16 | Hex.19 | G 1/4B |  |
| 3HS-GP | G 3/8        | 246      | P-14        | (82.5)          | (33)   | (4.5) | 18 | Hex.23 | G 3/8B |  |
| 4HS-GP | G 1/2        | 476      | P-18        | (93)            | (43)   | (5.5) | 20 | Hex.29 | G 1/2B |  |
| 6HS-GP | G 3/4        | 498      | P-24        | (96)            | (43)   | (5.5) | 22 | Hex.32 | G 3/4B |  |

**Plug HP-GS type (Male parallel thread with 30° cone-seat)**

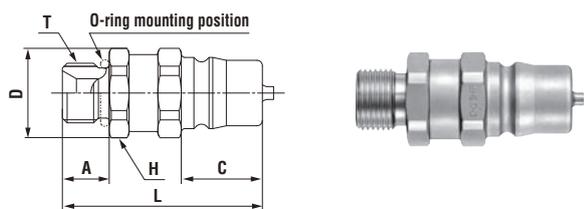

| Model  | Application* | Mass (g) | O-ring size | Dimensions (mm) |    |      |      |        |        |
|--------|--------------|----------|-------------|-----------------|----|------|------|--------|--------|
|        |              |          |             | L               | øD | A    | C    | H(WAF) | T      |
| 2HP-GS | G 1/4        | 59       | P-11        | (48)            | 21 | 11.5 | 17.5 | Hex.19 | G 1/4B |
| 3HP-GS | G 3/8        | 99       | P-14        | (55.5)          | 25 | 13   | 22.5 | Hex.23 | G 3/8B |
| 4HP-GS | G 1/2        | 167      | P-18        | (60.5)          | 31 | 14.5 | 27.5 | Hex.29 | G 1/2B |
| 6HP-GS | G 3/4        | 191      | P-24        | (63.5)          | 35 | 16.5 | 27.5 | Hex.32 | G 3/4B |

**Socket HS-GS type (Male parallel thread with 30° cone-seat)**

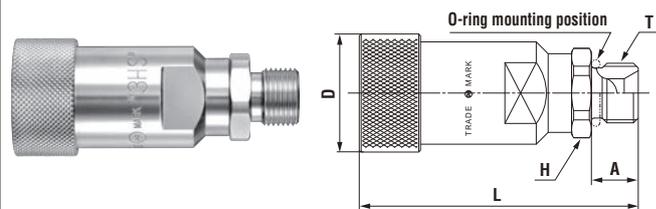

| Model  | Application* | Mass (g) | O-ring size | Dimensions (mm) |        |      |        |        |  |
|--------|--------------|----------|-------------|-----------------|--------|------|--------|--------|--|
|        |              |          |             | L               | øD     | A    | H(WAF) | T      |  |
| 2HS-GS | G 1/4        | 146      | P-11        | (65)            | (27.5) | 11.5 | Hex.19 | G 1/4B |  |
| 3HS-GS | G 3/8        | 242      | P-14        | (77.5)          | (33)   | 13   | Hex.23 | G 3/8B |  |
| 4HS-GS | G 1/2        | 469      | P-18        | (87.5)          | (43)   | 14.5 | Hex.29 | G 1/2B |  |
| 6HS-GS | G 3/4        | 485      | P-24        | (90)            | (43)   | 16.5 | Hex.32 | G 3/4B |  |

\*The counterpart of GP type must be the female parallel thread specified in JIS B 8363 with 30° cone-seat or the coupling with O-ring seal.  
The counterpart of GS type must be the female parallel thread JIS B 8363 with 30° flare or the coupling with O-ring seal.

• Sleeve stopper design is available for models 2HS to 8HS (except 66HS).

For High Pressure

# Hyper HSP Cupla

Connects hydraulic piping even with residual pressure up to 20.6 MPa (210 kgf/cm<sup>2</sup>)

Working pressure



Valve structure




Applicable fluids



**Purge function will set you free from the troublesome residual pressure elimination before connection and let you achieve efficient and frequent hydraulic pipe line coupling.**

- Both socket and plug have built-in automatic shut-off valves to prevent fluid spill out when disconnected.
- Interchangeable with standard HSP Cupla plug or socket in the same size.

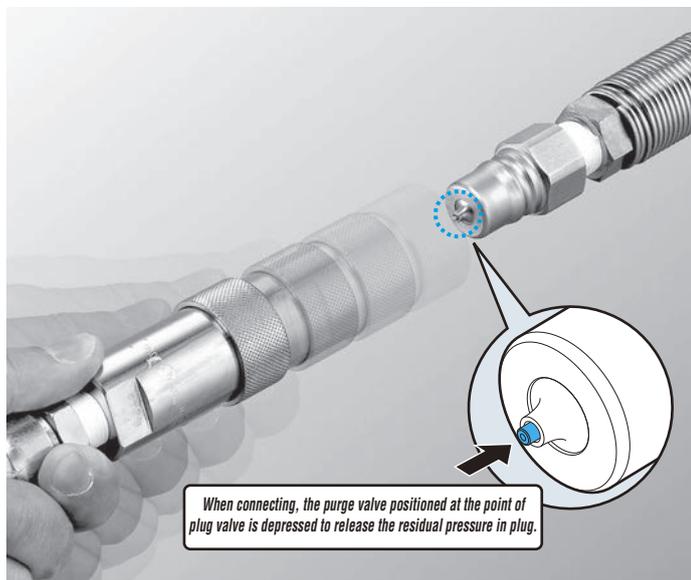

| Specifications   |                               |      |          |                           |                |         |                   |
|------------------|-------------------------------|------|----------|---------------------------|----------------|---------|-------------------|
| Body material    | Special steel (Nickel-plated) |      |          |                           |                |         |                   |
| Size (Thread)    | 1/4", 3/8", 1/2", 3/4", 1"    |      |          |                           |                |         |                   |
| Working pressure | MPa                           | 20.6 |          |                           |                |         |                   |
|                  | kgf/cm <sup>2</sup>           | 210  |          |                           |                |         |                   |
|                  | bar                           | 206  |          |                           |                |         |                   |
|                  | PSI                           | 2990 |          |                           |                |         |                   |
| Seal material    | Nitrile rubber                | Mark | NBR (SG) | Working temperature range | -20°C to +80°C | Remarks | Standard material |

| Max. Tightening Torque |  | Nm (kgf·cm) |          |          |            |            |
|------------------------|--|-------------|----------|----------|------------|------------|
| Size (Thread)          |  | 1/4"        | 3/8"     | 1/2"     | 3/4"       | 1"         |
| Torque                 |  | 28 (286)    | 45 (459) | 90 (918) | 100 (1020) | 180 (1836) |

**Flow Direction**

Fluid may flow in either direction from plug or from socket side when coupled.

**Interchangeability**  
Interchangeable with standard HSP Cupla plug or socket in the same size.

| Min. Cross-Sectional Area | (mm <sup>2</sup> ) |               |               |               |               |
|---------------------------|--------------------|---------------|---------------|---------------|---------------|
| Model                     | 2HP-PV/2HS-PV      | 3HP-PV/3HS-PV | 4HP-PV/4HS-PV | 6HP-PV/6HS-PV | 8HP-PV/8HS-PV |
| Min. cross-sectional area | 21                 | 37            | 77            | 77            | 203           |


| Suitability for Vacuum | 1.3 x 10 <sup>-1</sup> Pa (1 x 10 <sup>-3</sup> mmHg) |                |  |
|------------------------|---|----------------|--|
| Socket only            | Plug only   | When connected |  |
| —                      | —   | Operational    |  |

| Admixture of Air on Connection | Admixture of air may vary depending upon the usage conditions. (mL) |               |               |               |               |
|--------------------------------|---|---------------|---------------|---------------|---------------|
| Model                          | 2HP-PV/2HS-PV   | 3HP-PV/3HS-PV | 4HP-PV/4HS-PV | 6HP-PV/6HS-PV | 8HP-PV/8HS-PV |
| Volume of air                  | 0.7   | 1.9           | 3.5           | 3.5           | 12.4          |

| Connection Load under Residual Pressure (For reference) | (N)           |               |               |               |               |
|---|---------------|---------------|---------------|---------------|---------------|
| Residual pressure / Model                               | 2HP-PV/2HS-PV | 3HP-PV/3HS-PV | 4HP-PV/4HS-PV | 6HP-PV/6HS-PV | 8HP-PV/8HS-PV |
| at 5.0 MPa  | 50            | 85            | 85            | 85            | 100           |
| at 10.0 MPa   | 70            | 85            | 85            | 85            | 130           |
| at 15.0 MPa   | 100           | 100           | 100           | 100           | 170           |

**Flow Rate – Pressure Loss Characteristics**


[Test conditions] • Fluid : Hydraulic oil • Temperature : 30°C ± 5°C  
• Fluid viscosity : 32 x 10<sup>-6</sup> m<sup>2</sup>/s • Density : 0.87 x 10<sup>3</sup> kg/m<sup>3</sup>

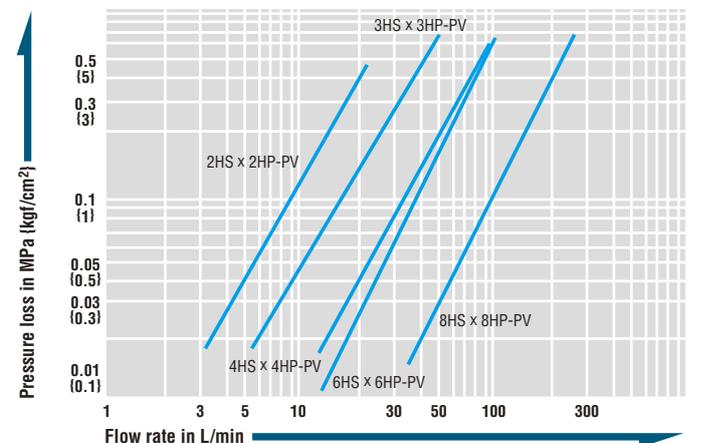

**Note:** Either socket or plug of Hyper HSP Cupla must be used on the line where the residual pressure remains. The counterpart of Hyper HSP must be either plug or socket of standard HSP Cupla.


Models and Dimensions

**Plug** HP type (Female thread)

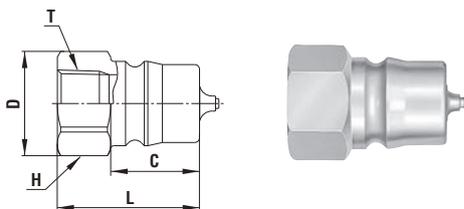

| Model  | Application | Mass (g) | Dimensions (mm) |      |      |        |        |
|--------|-------------|----------|-----------------|------|------|--------|--------|
|        |             |          | L               | ϕD   | C    | H(WAF) | T      |
| 2HP-PV | R 1/4       | 44       | 32              | 20.5 | 17.5 | Hex.19 | Rc 1/4 |
| 3HP-PV | R 3/8       | 72       | 38              | 25   | 22.5 | Hex.23 | Rc 3/8 |
| 4HP-PV | R 1/2       | 138      | 44              | 32   | 27.5 | Hex.29 | Rc 1/2 |
| 6HP-PV | R 3/4       | 147      | 50              | 35   | 27.5 | Hex.32 | Rc 3/4 |
| 8HP-PV | R 1         | 360      | 61              | 47   | 36   | 41     | Rc 1   |


**Socket** HS type (Female thread)

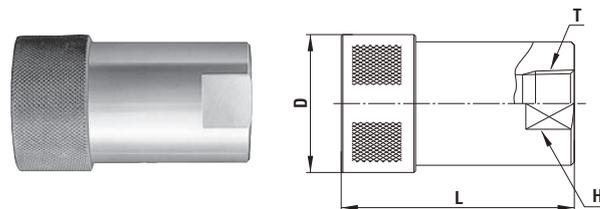

| Model  | Application | Mass (g) | Dimensions (mm) |        |        |        |
|--------|-------------|----------|-----------------|--------|--------|--------|
|        |             |          | L               | ϕD     | H(WAF) | T      |
| 2HS-PV | R 1/4       | 136      | 49              | (27.5) | 19     | Rc 1/4 |
| 3HS-PV | R 3/8       | 225      | 60              | (33)   | 23     | Rc 3/8 |
| 4HS-PV | R 1/2       | 485      | (72)            | (43)   | 35     | Rc 1/2 |
| 6HS-PV | R 3/4       | 460      | (72)            | (43)   | 35     | Rc 3/4 |
| 8HS-PV | R 1         | 1050     | 93              | (58)   | 46     | Rc 1   |

**Residual Pressure Release (or purge) Mechanism**

While connecting, the purge valve indicated with a circle is being pushed and releasing the residual pressure

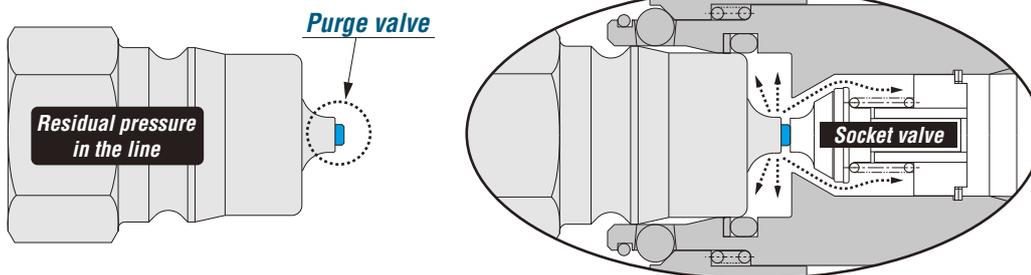

**Note:** Either socket or plug of Hyper HSP Cupla must be used on the line where the residual pressure remains. The counterpart of Hyper HSP must be either plug or socket of standard HSP Cupla. Hyper HSP Cupla can be connected under the residual pressure in the line, but cannot during pressurizing. It may lead to incomplete connection, durability deterioration or possible valve fly out.

For High Pressure

# 210 Cupla

For hydraulic pressure up to 20.6 MPa {210 kgf/cm<sup>2</sup>}

Working pressure



Valve structure




Applicable fluids



**Standard hydraulic Cuplas for general purposes with a working pressure up to 20.6 MPa.**  
**Low pressure loss, suitable for hydraulic equipment.**

- General purpose hydraulic Cuplas with a working pressure of 20.6 MPa {210 kgf/cm<sup>2</sup>}.
- Structure is designed to reduce pressure loss to the lowest, and is best for hydraulic applications that need big flow rates.
- Both socket and plug have built-in automatic shut-off valves that prevent fluid outflow when disconnected. Easy to handle.

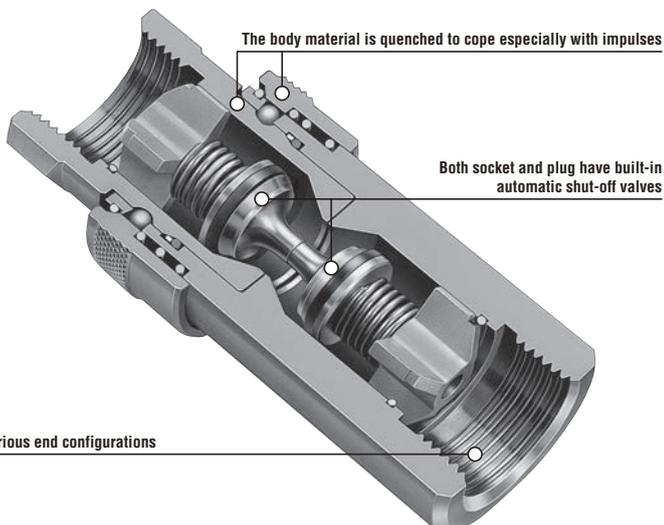

| Specifications                             |                               |             |                           |                      |
|--|-------------------------------|-------------|---------------------------|----------------------|
| Body material                              | Special steel (Nickel-plated) |             |                           |                      |
| Size (Thread)                              | 1/4", 3/8", 1/2", 3/4", 1"    |             |                           |                      |
| Working pressure                           | MPa                           | 20.6        |                           |                      |
|  | kgf/cm <sup>2</sup>           | 210         |                           |                      |
|  | bar                           | 206         |                           |                      |
|  | PSI                           | 2990        |                           |                      |
| Seal material<br>Working temperature range | Seal material                 | Mark        | Working temperature range | Remarks              |
|  | Nitrile rubber                | NBR (SG)    | -20°C to +80°C            | Standard material    |
|  | Fluoro rubber                 | FKM (X-100) | -20°C to +180°C           | Available on request |

| Max. Tightening Torque |  | Nm (kgf·cm) |          |          |            |            |
|------------------------|--|-------------|----------|----------|------------|------------|
| Size (Thread)          |  | 1/4"        | 3/8"     | 1/2"     | 3/4"       | 1"         |
| Torque                 |  | 28 (286)    | 45 (459) | 90 (918) | 100 (1020) | 180 (1836) |

**Flow Direction**


Fluid may flow in either direction from plug or from socket side when coupled.

**Interchangeability**  
 Different sizes are not interchangeable.

| Min. Cross-Sectional Area | (mm <sup>2</sup> ) |         |         |         |         |
|---------------------------|--------------------|---------|---------|---------|---------|
| Model                     | 210-2SP            | 210-3SP | 210-4SP | 210-6SP | 210-8SP |
| Min. cross-sectional area | 24.5               | 42.8    | 77.4    | 146.5   | 235.6   |


| Suitability for Vacuum |           | 1.3 Pa (1 x 10 <sup>-2</sup> mmHg) |
|------------------------|-----------|------------------------------------|
| Socket only            | Plug only | When connected                     |
| —                      | —         | Operational                        |

| Admixture of Air on Connection |         | Admixture of air may vary depending upon the usage conditions. (mL) |         |         |         |  |
|--------------------------------|---------|---|---------|---------|---------|--|
| Model                          | 210-2SP | 210-3SP   | 210-4SP | 210-6SP | 210-8SP |  |
| Volume of air                  | 0.85    | 1.02  | 2.63    | 8.83    | 16.04   |  |

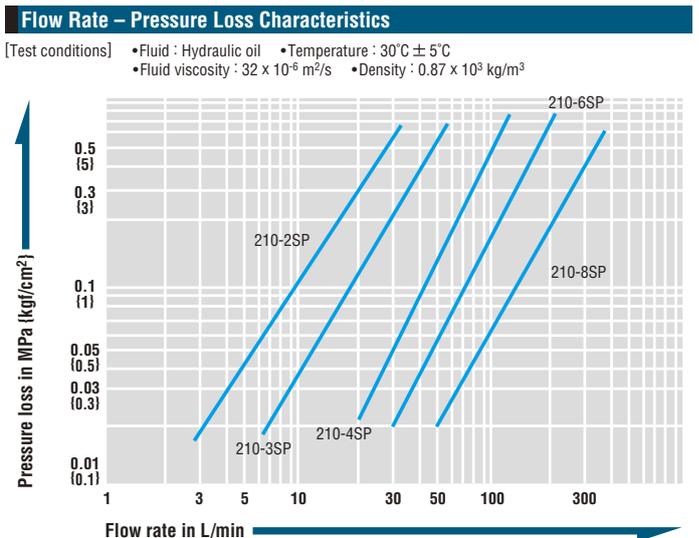


**⚠ Precautions for use**  
 There is no interchangeability between 210 Cupla and HSP Cupla or 280 Cupla. Do not connect each other even if some sizes are approximate.

**Plug Female thread**

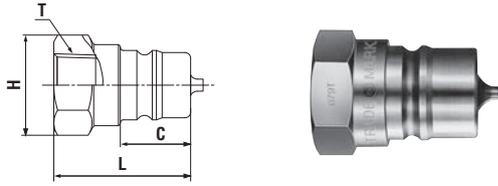


| Model  | Application | Mass (g) | Dimensions (mm) |      |        |        |
|--------|-------------|----------|-----------------|------|--------|--------|
|        |             |          | L               | C    | H(WAF) | T      |
| 210-2P | R 1/4       | 39       | 33              | 18   | Hex.19 | Rc 1/4 |
| 210-3P | R 3/8       | 57       | 36              | 18.5 | Hex.23 | Rc 3/8 |
| 210-4P | R 1/2       | 90       | 42.5            | 24   | Hex.27 | Rc 1/2 |
| 210-6P | R 3/4       | 195      | 51              | 28   | Hex.35 | Rc 3/4 |
| 210-8P | R 1         | 293      | 61              | 35   | Hex.41 | Rc 1   |

**Socket Female thread**

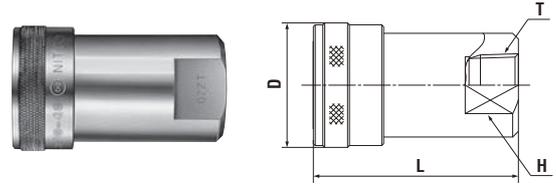

| Model  | Application | Mass (g) | Dimensions (mm) |      |        |        |
|--------|-------------|----------|-----------------|------|--------|--------|
|        |             |          | L               | øD   | H(WAF) | T      |
| 210-2S | R 1/4       | 158      | 50.5            | (30) | 22     | Rc 1/4 |
| 210-3S | R 3/8       | 193      | 54              | (33) | 23     | Rc 3/8 |
| 210-4S | R 1/2       | 330      | 65              | (39) | 29     | Rc 1/2 |
| 210-6S | R 3/4       | 566      | 78.5            | (48) | 35     | Rc 3/4 |
| 210-8S | R 1         | 861      | 95              | (55) | 41     | Rc 1   |

**Application Example**

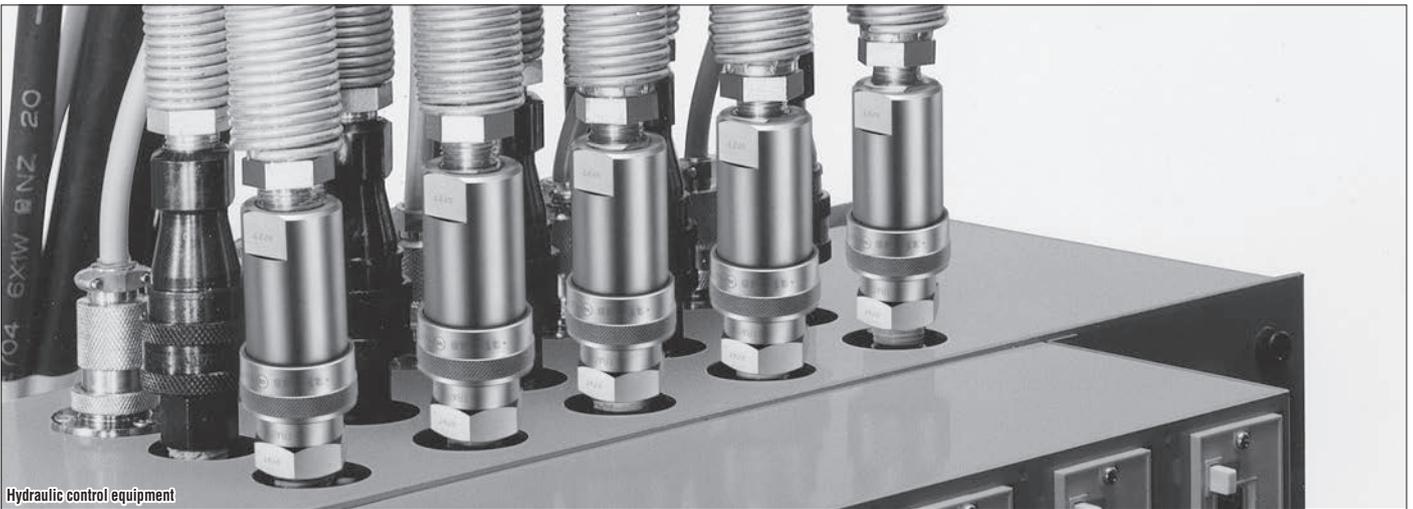

For High Pressure

# HSU Cupla

Stainless steel Cupla for high pressure up to 21.0 MPa (214 kgf/cm<sup>2</sup>)

Working pressure



21.0 MPa  
(214 kgf/cm<sup>2</sup>)

Valve structure



Two-way shut-off

Applicable fluids



Water



Hydraulic oil



Gas

The flow volume is increased by between 14 to 44% while at the same time the coupled length is reduced by at least 10% compared with the S210 Cupla.

- Body material is excellent corrosion resistant stainless steel (SUS304). Suitable for use in tough/harsh environments such as offshore applications.
- Sleeve stopper mechanism can be engaged by rotating sleeve after connection.
- Despite having a stainless steel body, the working pressure, 21.0 MPa, of HSU Cupla is comparable to that of special steel body Cuplas such as HSP Cupla series.
- Both socket and plug have built-in automatic shut-off valves that prevent fluid outflow on disconnection.
- Hydrogenated nitrile rubber (HNBR) is used as a seal material for wide variety of liquids.



## Specifications

|                           |                               |        |      |
|---------------------------|-------------------------------|--------|------|
| Body material             | Stainless steel (SUS304)      |        |      |
| Size (Thread)             | 1/4", 3/8", 1/2", 3/4", 1"    |        |      |
| Working pressure          | MPa                           | 21.0   |      |
|                           | kgf/cm <sup>2</sup>           | 214    |      |
|                           | bar                           | 210    |      |
|                           | PSI                           | 3045.8 |      |
| Seal material             | Hydrogenated nitrile rubber * | Mark   | HNBR |
| Working temperature range | -20°C to +120°C               |        |      |

\* The seal materials used in HSU Cupla are not suitable for Freon gas.

## Max. Tightening Torque

N m {kgf·cm}

|               |          |          |          |            |            |
|---------------|----------|----------|----------|------------|------------|
| Size (Thread) | 1/4"     | 3/8"     | 1/2"     | 3/4"       | 1"         |
| Torque        | 28 {286} | 35 {357} | 70 {714} | 100 {1020} | 180 {1836} |

## Flow Direction

Fluid may flow in either direction from plug or from socket side when coupled.



## Interchangeability

Different size socket and plug cannot be connected to each other.

## Min. Cross-Sectional Area

(mm<sup>2</sup>)

|                           |         |         |         |         |         |
|---------------------------|---------|---------|---------|---------|---------|
| Model                     | HSU-2SP | HSU-3SP | HSU-4SP | HSU-6SP | HSU-8SP |
| Min. cross-sectional area | 27.1    | 48.2    | 84.2    | 143.6   | 221.2   |

## Suitability for Vacuum

1.3 × 10<sup>-1</sup> Pa (1 × 10<sup>-3</sup> mmHg)

|             |           |                |
|-------------|-----------|----------------|
| Socket only | Plug only | When connected |
| —           | —         | Operational    |

## Admixture of Air on Connection

Admixture of air may vary depending upon the usage conditions.

(mL)

|                         |         |         |         |         |         |
|-------------------------|---------|---------|---------|---------|---------|
| Model                   | HSU-2SP | HSU-3SP | HSU-4SP | HSU-6SP | HSU-8SP |
| Volume of air admixture | 0.7     | 1.5     | 3.6     | 6.3     | 10.9    |

## Volume of Spillage per Disconnection


Volume of spillage may vary depending upon the usage conditions.

(mL)


|                    |         |         |         |         |         |
|--------------------|---------|---------|---------|---------|---------|
| Model              | HSU-2SP | HSU-3SP | HSU-4SP | HSU-6SP | HSU-8SP |
| Volume of spillage | 0.6     | 1.7     | 3.0     | 6.8     | 11.2    |

## Flow Rate – Pressure Loss Characteristics (Hydraulic oil / Water)

[Test conditions] • Fluid : Hydraulic oil • Temperature : 30°C to 32°C  
• Fluid viscosity : 32 × 10<sup>-6</sup> m<sup>2</sup>/s • Density : 0.87 × 10<sup>3</sup> kg/m<sup>3</sup>

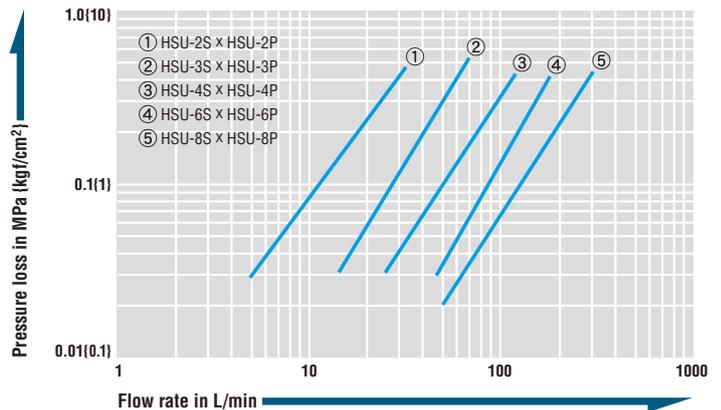


[Test conditions] • Fluid : Water • Temperature : 18°C

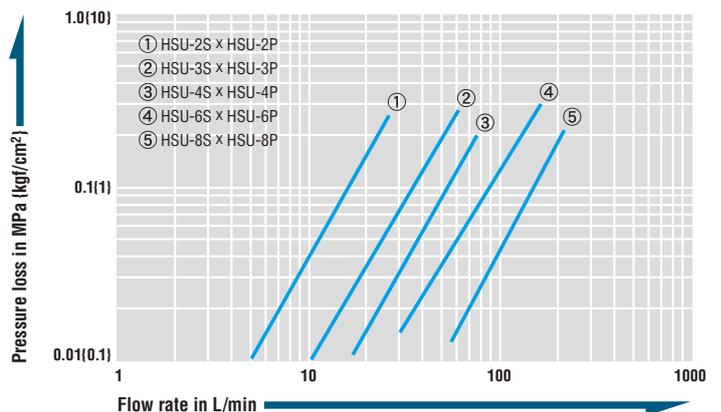


Models and Dimensions

**Plug** Female thread

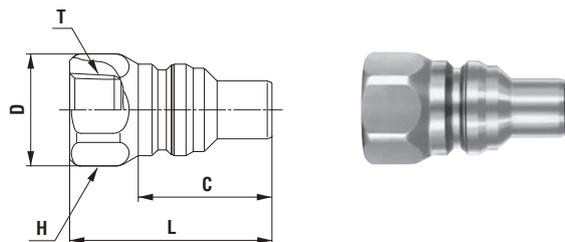

| Model  | Application | Mass (g) | Dimensions (mm) |      |      |         |        |
|--------|-------------|----------|-----------------|------|------|---------|--------|
|        |             |          | L               | C    | ∅D   | H (WAF) | T      |
| HSU-2P | R 1/4       | 49       | 45.5            | 27.5 | 21   | Hex.19  | Rc 1/4 |
| HSU-3P | R 3/8       | 86       | 51.5            | 32   | 26.5 | Hex.24  | Rc 3/8 |
| HSU-4P | R 1/2       | 152      | 59              | 39   | 33   | Hex.30  | Rc 1/2 |
| HSU-6P | R 3/4       | 295      | 74              | 51.5 | 42   | Hex.38  | Rc 3/4 |
| HSU-8P | R 1         | 481      | 83              | 58   | 51   | Hex.46  | Rc 1   |

**Socket** Female thread

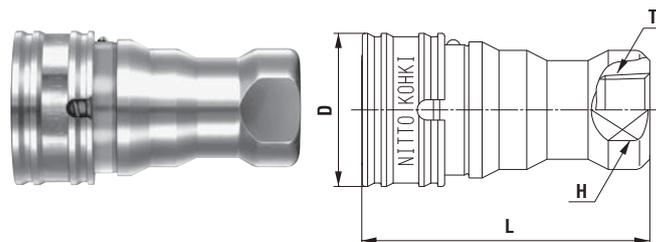


| Model  | Application | Mass (g) | Dimensions (mm) |    |         |        |
|--------|-------------|----------|-----------------|----|---------|--------|
|        |             |          | L               | ∅D | H (WAF) | T      |
| HSU-2S | R 1/4       | 142      | 63              | 28 | 19      | Rc 1/4 |
| HSU-3S | R 3/8       | 255      | 71.5            | 35 | 24      | Rc 3/8 |
| HSU-4S | R 1/2       | 479      | 84              | 45 | 30      | Rc 1/2 |
| HSU-6S | R 3/4       | 953      | 106             | 55 | 38      | Rc 3/4 |
| HSU-8S | R 1         | 1432     | 118             | 65 | 46      | Rc 1   |

Sleeve Stopper Mechanism


**Easy to operate sleeve stopper mechanism enhances operator safety.**

**At connection**

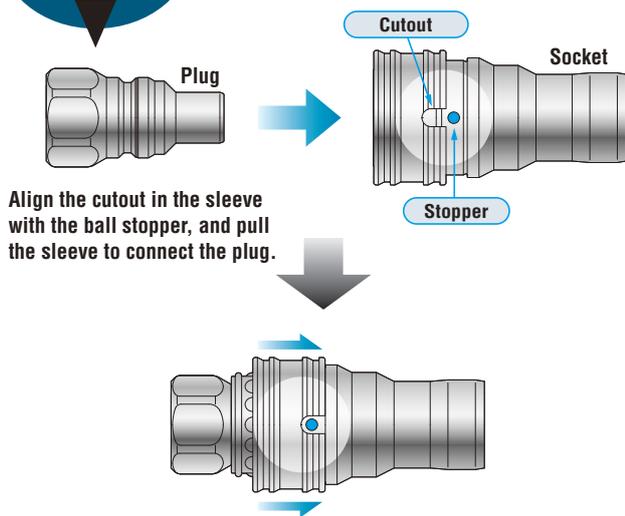

**Locking the sleeve**

Without alignment of the cutout with the ball stopper disconnection cannot be made.

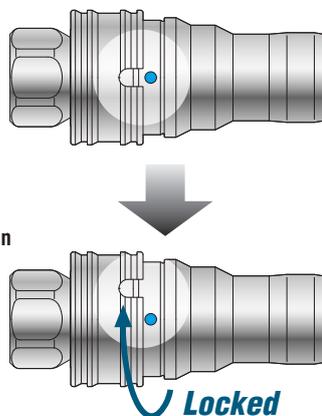

**Accidental disconnection is prevented.**

The stopper is marked with blue for visual understanding.

For High Pressure

# S210 Cupla


Stainless steel Cupla for high pressure up to 20.6 MPa (210 kgf/cm<sup>2</sup>)

|   |  |                                       |                   |         |
|---|--|---------------------------------------|-------------------|---------|
| <b>Working pressure</b><br><br>20.6 MPa<br>(210 kgf/cm <sup>2</sup> ) | <b>Valve structure</b><br><br>Two-way shut-off | <b>Applicable fluids</b><br><br>Water | <br>Hydraulic oil | <br>Gas |
|---|--|---------------------------------------|-------------------|---------|

**Stainless steel for excellent corrosion resistance!**

**The unique “inner seal mechanism” accepts a working pressure up to 20.6 MPa.**

- Body material is excellent corrosion resistant stainless steel (SUS304). Suited for use in tough conditions such as ocean development.
- Although it is made of stainless steel, the unique “inner seal mechanism” enables the working pressure of 20.6 MPa (210 kgf/cm<sup>2</sup>), the same as special steel's.
- Safety lock (accidental disconnection prevention mechanism) ensures tight and secured connection under vibration or impacts.
- Both socket and plug have built-in automatic shut-off valves that prevent fluid outflow on disconnection. Easy to handle.

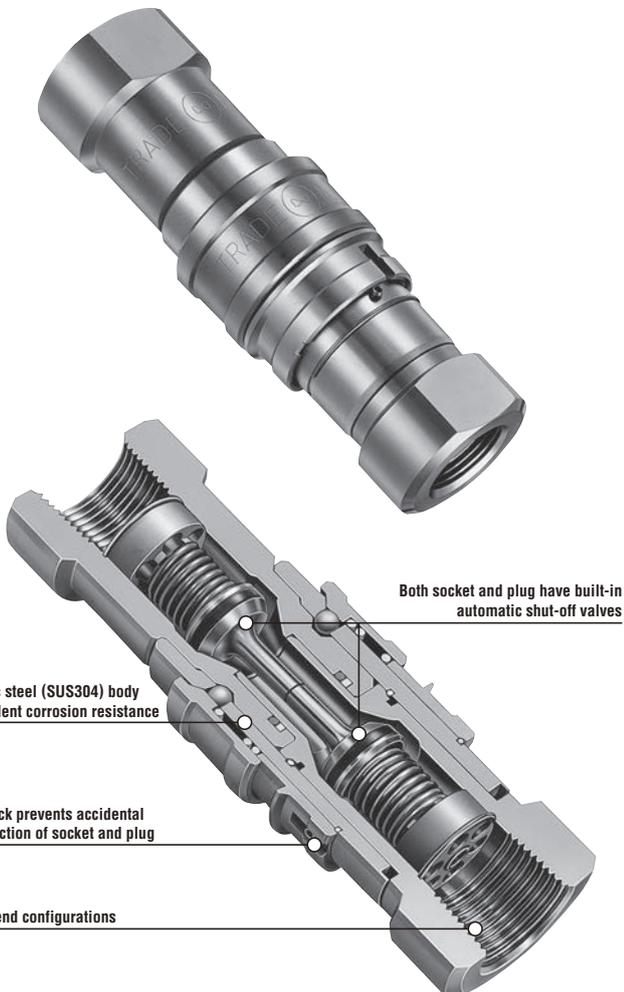

| Specifications                             |                            |             |                           |                    |
|--|----------------------------|-------------|---------------------------|--------------------|
| Body material                              | Stainless steel (SUS304)   |             |                           |                    |
| Size (Thread)                              | 1/4", 3/8", 1/2", 3/4", 1" |             |                           |                    |
| Working pressure                           | MPa                        | 20.6        |                           |                    |
|  | kgf/cm <sup>2</sup>        | 210         |                           |                    |
|  | bar                        | 206         |                           |                    |
|  | PSI                        | 2990        |                           |                    |
| Seal material<br>Working temperature range | Seal material              | Mark        | Working temperature range | Remarks            |
|  | Fluoro rubber              | FKM (X-100) | -20°C to +180°C           | Standard material  |
|  | Nitrile rubber             | NBR (SG)    | -20°C to +80°C            | Made-to-order item |

• The product comes with a dust cap.

| Max. Tightening Torque |          |          |          | Nm (kgf·cm) |            |
|------------------------|----------|----------|----------|-------------|------------|
| Size (Thread)          | 1/4"     | 3/8"     | 1/2"     | 3/4"        | 1"         |
| Torque                 | 28 (286) | 35 (357) | 70 (714) | 100 (1020)  | 180 (1836) |

**Flow Direction**


Fluid may flow in either direction from plug or from socket side when coupled.

**Interchangeability**  
Different sizes are not interchangeable.

| Min. Cross-Sectional Area |          |          |          |          | (mm <sup>2</sup> ) |
|---------------------------|----------|----------|----------|----------|--------------------|
| Model                     | S210-2SP | S210-3SP | S210-4SP | S210-6SP | S210-8SP           |
| Min. cross-sectional area | 24       | 47       | 84       | 153      | 233                |


| Suitability for Vacuum |           |                | 1.3 Pa (1 x 10 <sup>-2</sup> mmHg) |
|------------------------|-----------|----------------|------------------------------------|
| Socket only            | Plug only | When connected |                                    |
| —                      | —         | Operational    |                                    |

| Admixture of Air on Connection |          |          |          |          | Admixture of air may vary depending upon the usage conditions. | (mL) |
|--------------------------------|----------|----------|----------|----------|--|------|
| Model                          | S210-2SP | S210-3SP | S210-4SP | S210-6SP | S210-8SP   |      |
| Volume of air                  | 0.8      | 1.6      | 3.2      | 6.3      | 14.3   |      |

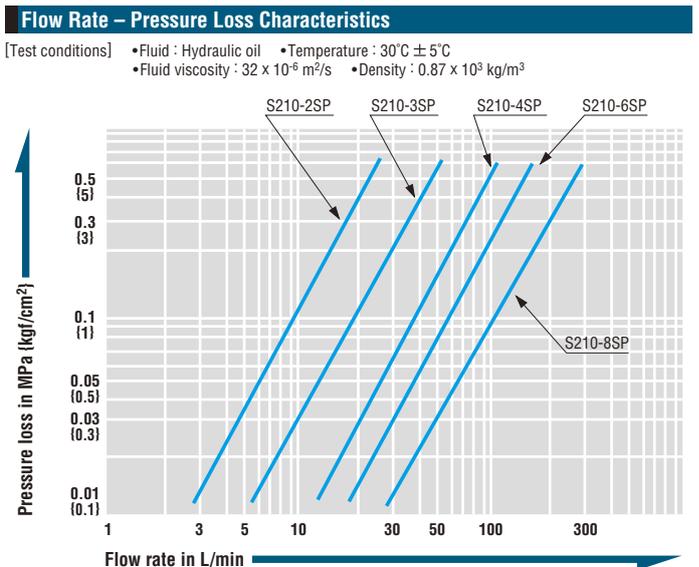


Models and Dimensions

**Plug** Female thread

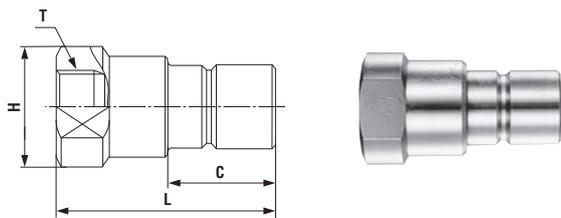


| Model   | Application | Mass (g) | Dimensions (mm) |      |          |        |
|---------|-------------|----------|-----------------|------|----------|--------|
|         |             |          | L               | C    | H(WAF)   | T      |
| S210-2P | R 1/4       | 74       | 50.5            | 20   | 19 x ø22 | Rc 1/4 |
| S210-3P | R 3/8       | 127      | 59              | 24   | 24 x ø28 | Rc 3/8 |
| S210-4P | R 1/2       | 239      | 70.5            | 28   | 30 x ø35 | Rc 1/2 |
| S210-6P | R 3/4       | 446      | 81.5            | 35.5 | 38 x ø44 | Rc 3/4 |
| S210-8P | R 1         | 939      | 100             | 47.5 | 50 x ø58 | Rc 1   |

**Socket** Female thread

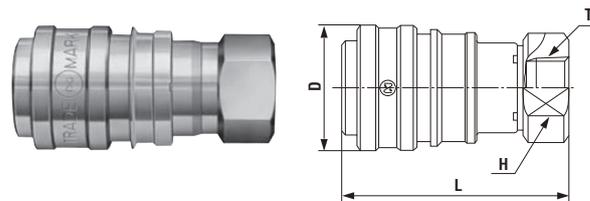

| Model   | Application | Mass (g) | Dimensions (mm) |      |        |        |
|---------|-------------|----------|-----------------|------|--------|--------|
|         |             |          | L               | øD   | H(WAF) | T      |
| S210-2S | R 1/4       | 137      | (59)            | 27   | 19     | Rc 1/4 |
| S210-3S | R 3/8       | 226      | (68.5)          | 32   | 24     | Rc 3/8 |
| S210-4S | R 1/2       | 406      | (81)            | 39.7 | 30     | Rc 1/2 |
| S210-6S | R 3/4       | 710      | (97.5)          | 48   | 38     | Rc 3/4 |
| S210-8S | R 1         | 1,381    | (118)           | 62   | 50     | Rc 1   |

Construction of and How to Use Safety Lock (Accidental Disconnection Prevention Mechanism)

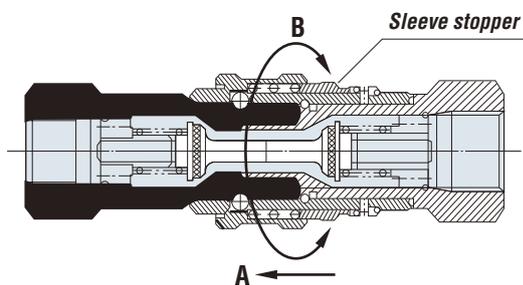

**To lock the sleeve**

Push the sleeve stopper towards A and turn 90° clockwise or counterclockwise to engage the sleeve stopper.

**To unlock the sleeve**

Push the sleeve stopper toward A and turn 90° (toward B) to the left or right to disengage the sleeve stopper.

Application Example



For High Pressure

# 280 Cupla

For hydraulic pressure up to 27.5 to 31.5 MPa {281 to 321 kgf/cm<sup>2</sup>}

Working pressure



27.5 to 31.5 MPa  
(281 to 321 kgf/cm<sup>2</sup>)

Valve structure



Two-way shut-off

Applicable fluids



Hydraulic oil

**Generic Cupla copes with high pressure lines in hydraulic equipment! Low pressure loss is ideal for hydraulic equipment.**

- Complys with international standard ISO 7241-1A.
- General purpose hydraulic Cuplas with the working pressure up to 27.5 to 31.5 MPa {281 to 321 kgf/cm<sup>2</sup>}.
- Structure keeps pressure loss extremely low, particularly ideal for hydraulic applications requiring high flow rates.
- Both socket and plug have built-in automatic shut-off valves to prevent fluid spill out when disconnected. Easy to handle.
- Special steel body material is adopted for its excellent strength and additional quenching treatment is done to withstand hydro pressure impacts.



| Specifications            |   |                |          |                           |
|---------------------------|---|----------------|----------|---------------------------|
| Body material             | Special steel (Bright chromate conversion coating : silver) |                |          |                           |
| Size (Thread)             | 1/4", 3/8"  | 1/2", 3/4", 1" |          |                           |
| Working pressure          | MPa   | 31.5           | 27.5     |                           |
|                           | kgf/cm <sup>2</sup>   | 321            | 281      |                           |
|                           | bar   | 315            | 275      |                           |
|                           | PSI   | 4570           | 3990     |                           |
| Seal material             | Nitrile rubber  | Mark           | NBR (SG) | Working temperature range |
| Working temperature range | -20°C to +80°C  |                |          |                           |
| Remarks                   |   |                |          |                           |
| Standard material         |   |                |          |                           |

| Max. Tightening Torque |          |          |          |            |            |
|------------------------|----------|----------|----------|------------|------------|
| Size (Thread)          | 1/4"     | 3/8"     | 1/2"     | 3/4"       | 1"         |
| Torque                 | 28 {286} | 40 {408} | 80 {816} | 100 {1020} | 180 {1836} |

**Flow Direction**

Fluid may flow in either direction from plug or from socket side when coupled.

**Interchangeability**  
Different sizes cannot be connected.


| Min. Cross-Sectional Area | (mm <sup>2</sup> ) |         |         |         |         |
|---------------------------|--------------------|---------|---------|---------|---------|
| Model                     | 280-2SP            | 280-3SP | 280-4SP | 280-6SP | 280-8SP |
| Min. cross-sectional area | 11.4               | 42.8    | 79.1    | 146.5   | 235.6   |

| Suitability for Vacuum |           |                | 1.3 Pa {1 x 10 <sup>-2</sup> mmHg} |
|------------------------|-----------|----------------|------------------------------------|
| Socket only            | Plug only | When connected |                                    |
| —                      | —         | Operational    |                                    |

| Admixture of Air on Connection | Admixture of air may vary depending upon the usage conditions. |         |         |         |         | (mL) |
|--------------------------------|--|---------|---------|---------|---------|------|
| Model                          | 280-2SP  | 280-3SP | 280-4SP | 280-6SP | 280-8SP |      |
| Volume of air                  | 0.37   | 1.02    | 2.63    | 8.83    | 16.04   |      |

**Flow Rate – Pressure Loss Characteristics**

[Test conditions] •Fluid : Hydraulic oil •Temperature : 30°C ± 5°C  
•Fluid viscosity : 32 x 10<sup>-6</sup> m<sup>2</sup>/s •Density : 0.87 x 10<sup>3</sup> kg/m<sup>3</sup>

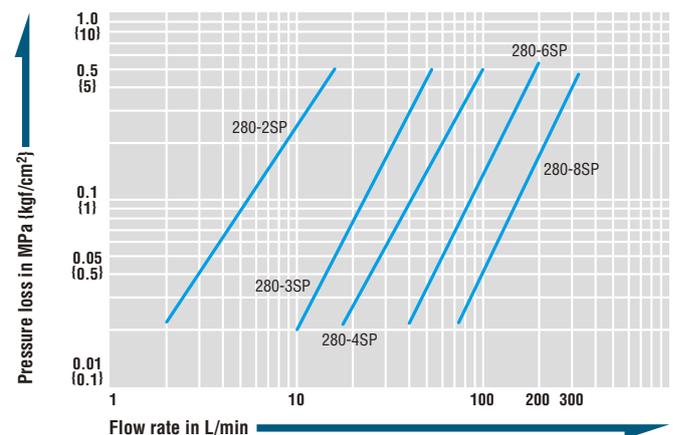


**⚠ Precautions for use**

There is no interchangeability between 280 Cupla and HSP Cupla or 210 Cupla. Do not connect each other even if some sizes are approximate.

Models and Dimensions


**Plug Female thread**

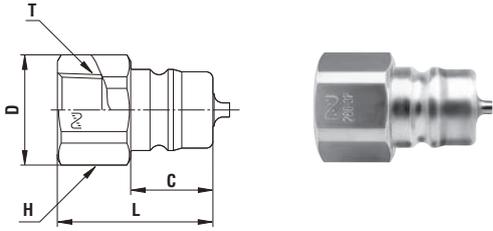

| Model  | Application | Mass (g) | Dimensions (mm) |      |      |        |        |
|--------|-------------|----------|-----------------|------|------|--------|--------|
|        |             |          | L               | øD   | C    | H(WAF) | T      |
| 280-2P | R 1/4       | 35       | 31.5            | 20.5 | 15   | Hex.19 | Rc 1/4 |
| 280-3P | R 3/8       | 59       | 35              | 25   | 18.5 | Hex.23 | Rc 3/8 |
| 280-4P | R 1/2       | 115      | 44              | 32   | 24.5 | Hex.29 | Rc 1/2 |
| 280-6P | R 3/4       | 178      | 52.5            | 35   | 28   | Hex.32 | Rc 3/4 |
| 280-8P | R 1         | 331      | 63.5            | 44   | 35   | 41     | Rc 1   |



\* Internal structural design of 280-6S and 280-8S is partly different from the above drawing.

**Socket Female thread**

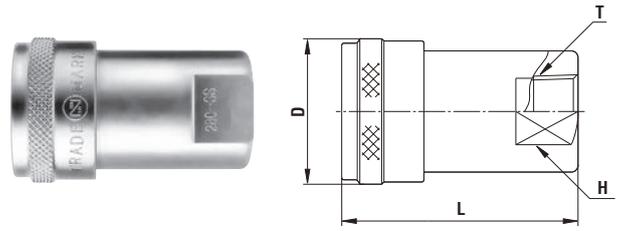

| Model  | Application | Mass (g) | Dimensions (mm) |      |        |        |
|--------|-------------|----------|-----------------|------|--------|--------|
|        |             |          | L               | øD   | H(WAF) | T      |
| 280-2S | R 1/4       | 110      | 46              | (27) | 19     | Rc 1/4 |
| 280-3S | R 3/8       | 185      | 53              | (33) | 23     | Rc 3/8 |
| 280-4S | R 1/2       | 335      | 66.5            | (39) | 29     | Rc 1/2 |
| 280-6S | R 3/4       | 571      | 81              | (48) | 35     | Rc 3/4 |
| 280-8S | R 1         | 871      | 98              | (55) | 41     | Rc 1   |

**Application Example**

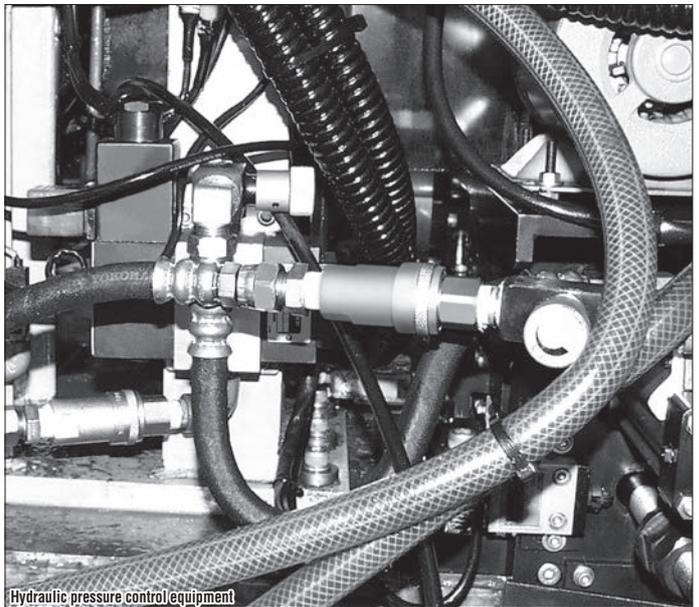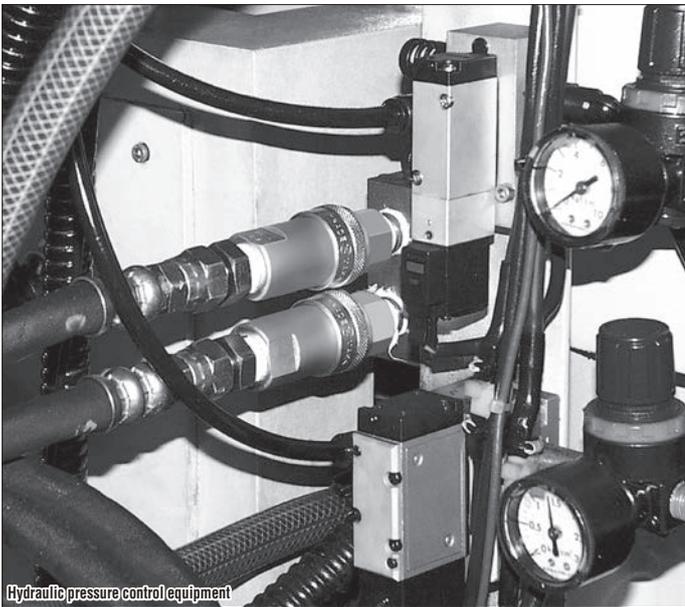

For High Pressure

# 350 Cupla

For hydraulic pressures up to 34.5 MPa {352 kgf/cm<sup>2</sup>}

Working pressure



Valve structure




Applicable fluids



Their “airless valve shut-off design” greatly reduces air admixture! Ideal for hydraulic lines with larger pressure fluctuations.

- Locking mechanism to prevent accidental disconnection ensures tight connection even under vibration or impact.
- Both socket and plug have built-in automatic shut-off valves to prevent fluid spill out when disconnected. Easy to handle.

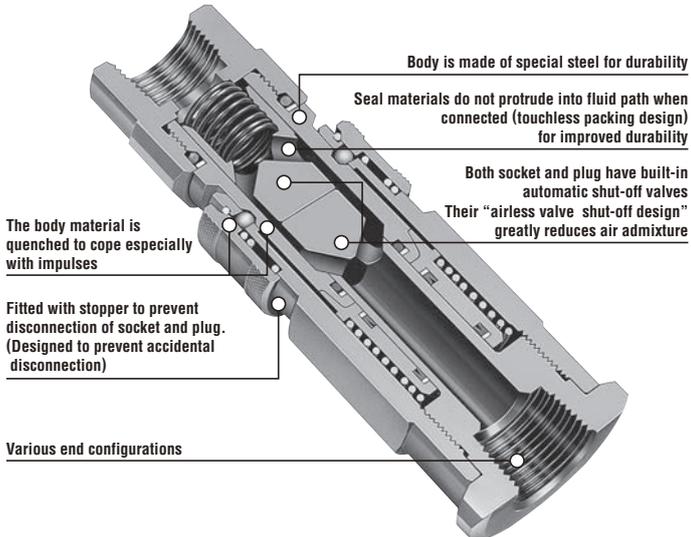


## Specifications

|  |  |             |                           |                    |
|--|--|-------------|---------------------------|--------------------|
| Body material                              | Special steel (Nickel-plated)                  |             |                           |                    |
| Size (Thread)                              | 1/4", 3/8", 1/2", 3/4", 1", 1 1/4", 1 1/2", 2" |             |                           |                    |
| Working pressure                           | MPa  | 34.5        |                           |                    |
|  | kgf/cm <sup>2</sup>                            | 352         |                           |                    |
|  | bar  | 345         |                           |                    |
|  | PSI  | 5000        |                           |                    |
| Seal material<br>Working temperature range | Seal material                                  | Mark        | Working temperature range | Remarks            |
|  | Fluoro rubber                                  | FKM (X-100) | -20°C to +180°C           | Standard material  |
|  | Nitrile rubber                                 | NBR (SG)    | -20°C to +80°C            | Made-to-order item |

## Max. Tightening Torque Nm (kgf-cm)

| Size (Thread) | 1/4"        | 3/8"        | 1/2"        | 3/4"          | 1"            | 1 1/4"        | 1 1/2"        | 2"            |
|---------------|-------------|-------------|-------------|---------------|---------------|---------------|---------------|---------------|
| Torque        | 28<br>{286} | 40<br>{408} | 80<br>{816} | 150<br>{1530} | 250<br>{2550} | 500<br>{5100} | 500<br>{5100} | 700<br>{7140} |

## Flow Direction

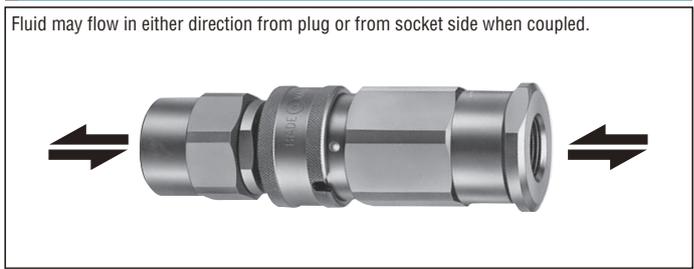

## Interchangeability

Different size socket and plug cannot be connected each other. However, 350-2SP with 350-3SP or 350-10SP with 350-12SP can be connected each other.

## Min. Cross-Sectional Area (mm<sup>2</sup>)

| Model                     | 350-2SP | 350-3SP | 350-4SP | 350-6SP | 350-8SP | 350-10SP | 350-12SP | 350-16SP |
|---------------------------|---------|---------|---------|---------|---------|----------|----------|----------|
| Min. cross-sectional area | 34.2    | 34.2    | 73.0    | 149.6   | 227.0   | 452.4    | 452.4    | 907.9    |


## Suitability for Vacuum

Not suitable for vacuum application in either connected or disconnected condition.

## Admixture of Air on Connection (mL)

| Model         | 350-2SP | 350-3SP | 350-4SP | 350-6SP | 350-8SP | 350-10SP | 350-12SP | 350-16SP |
|---------------|---------|---------|---------|---------|---------|----------|----------|----------|
| Volume of air | 0.1     | 0.1     | 0.2     | 0.3     | 0.5     | 0.9      | 0.9      | 2.0      |

## Flow Rate – Pressure Loss Characteristics

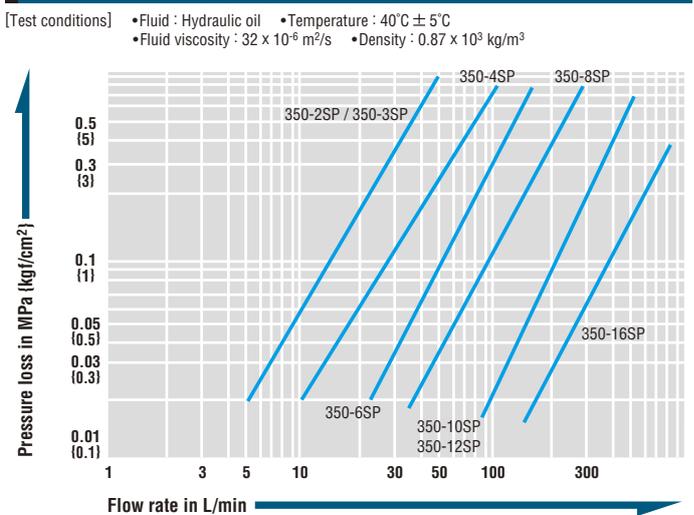


**⚠ Precautions for use**  
Do not connect / disconnect Cuplas when pressure is applied or remaining.

Models and Dimensions

Product appearance may vary by size. / WAF : WAF stands for width across flats.


**Plug** Female thread

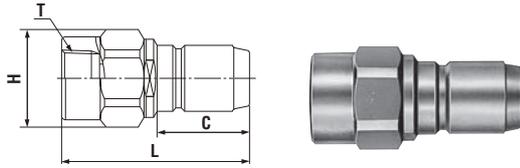

| Model    | Application | Mass (g) | Dimensions (mm) |      |              |          |
|----------|-------------|----------|-----------------|------|--------------|----------|
|          |             |          | L               | C    | H(WAF)       | T        |
| 350-2P   | R 1/4       | 170      | (72)            | 36   | Hex.27 x ø29 | Rc 1/4   |
| 350-3P   | R 3/8       | 167      | (72)            | 36   | Hex.27 x ø29 | Rc 3/8   |
| 350-4P   | R 1/2       | 245      | 85              | 40.5 | Hex.27 x ø30 | Rc 1/2   |
| 350-6P   | R 3/4       | 473      | (90)            | 44.5 | Hex.41 x ø45 | Rc 3/4   |
| 350-8P   | R 1         | 1,035    | (119)           | 57   | Hex.50 x ø55 | Rc 1     |
| 350-10P  | R 1 1/4     | 2,700    | (144)           | 75   | Hex.70 x ø78 | Rc 1 1/4 |
| 350-12P  | R 1 1/2     | 2,600    | (144)           | 75   | Hex.70 x ø78 | Rc 1 1/2 |
| 350-16P* | R 2         | 7,500    | (198)           | 85.5 | 90 x ø105    | Rc 2     |

\* Available on request  
 • G thread is available on request.

**Socket** Female thread

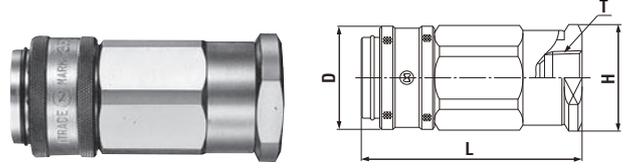

| Model    | Application | Mass (g) | Dimensions (mm) |      |              |          |
|----------|-------------|----------|-----------------|------|--------------|----------|
|          |             |          | L               | øD   | H(WAF)       | T        |
| 350-2S   | R 1/4       | 360      | (82)            | (34) | Hex.30       | Rc 1/4   |
| 350-3S   | R 3/8       | 353      | (82)            | (34) | Hex.30       | Rc 3/8   |
| 350-4S   | R 1/2       | 545      | (93.5)          | (41) | Hex.36       | Rc 1/2   |
| 350-6S   | R 3/4       | 976      | (105.5)         | (49) | 46 x ø52     | Rc 3/4   |
| 350-8S   | R 1         | 1,740    | (129)           | (63) | 55 x ø62     | Rc 1     |
| 350-10S  | R 1 1/4     | 5,600    | (180)           | 89   | Hex.80 x ø90 | Rc 1 1/4 |
| 350-12S  | R 1 1/2     | 5,500    | (180)           | 89   | Hex.80 x ø90 | Rc 1 1/2 |
| 350-16S* | R 2         | 14,500   | (239)           | 117  | 105          | Rc 2     |

\* Available on request  
 • G thread is available on request.

Application Example



Hydraulic unit

Optional Accessory


# Purge Adapter

Metal Purge Adapter for hydraulic lines (Semi-standard)

• Can be attached to hydraulic lines to purge residual pressure effectively.

|                           |   |
|---------------------------|---|
| Model                     | PAD-2 (Part No.CB19855)                               |
| Applicable fluid          | Hydraulic oil   |
| Material                  | Steel (With autocatalytic nickel-phosphorus coating)  |
| Working pressure          | 35.0 MPa, 357 kgf/cm <sup>2</sup> , 350 bar, 5080 PSI |
| Seal material             | Nitrile rubber (NBR)                                  |
| Working temperature range | -5°C to +80   |

When ordering, please indicate Model Name or part number.  
 Semi standard items: As these items are not always in stock, delivery time is subject to confirmation.

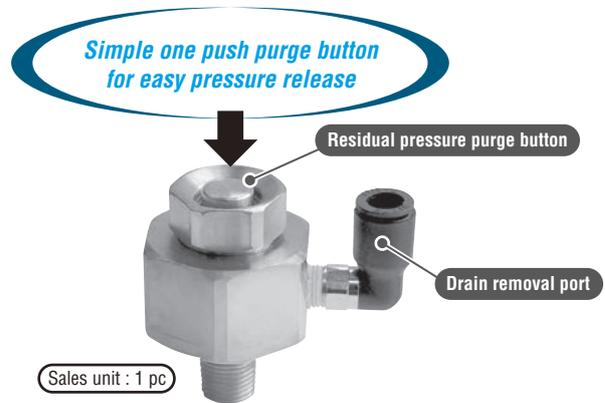

For High Pressure

# Flat Face Cupla F35

For hydraulic pressures up to 35.0 MPa (357 kgf/cm<sup>2</sup>) with flat contact face

Working pressure



Valve structure




Applicable fluids




## Flat contact face design reduces spill upon disconnection by less than half compared with that of conventional design.

- Flat contact face design makes it easy to clean dust and foreign matters adhered on the surface of coupling so as to prevent them from entering inside and thus causing faulty operation of connection or disconnection.
- Flat contact face design minimizes air admixture during connection to keep the possible malfunction of equipment caused by the air bubbles in the hydraulic line at minimum level.
- Push-to-connect operation.
- Sleeve stopper mechanism is engaged by rotating sleeve after connection. It prevents accidental disconnection even when vibration or impact is applied to the Cupla.
- The special design reduces pressure loss considerably, and especially suited to hydraulic applications in which big flow is needed. Both socket and plug have built-in automatic shut-off valves that prevent fluid spill out on disconnection.

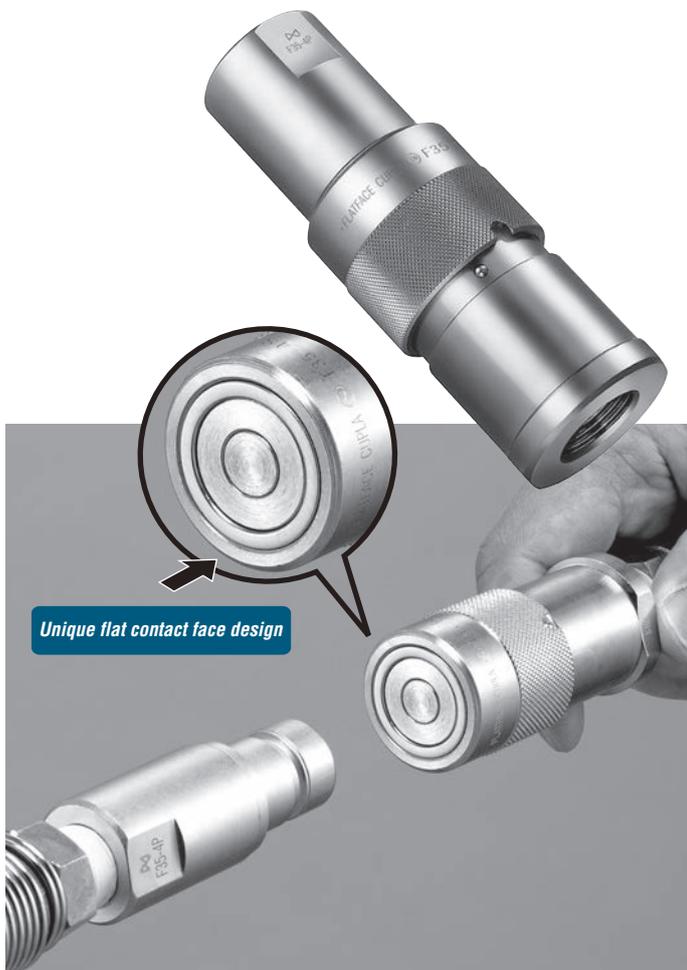

| Specifications            |                               |             |                           |                    |
|---------------------------|-------------------------------|-------------|---------------------------|--------------------|
| Body material             | Special steel (Nickel-plated) |             |                           |                    |
| Size (Thread)             | 1/4", 3/8", 1/2", 3/4", 1"    |             |                           |                    |
| Working pressure          | MPa                           | 35.0        |                           |                    |
|                           | kgf/cm <sup>2</sup>           | 357         |                           |                    |
|                           | bar                           | 350         |                           |                    |
|                           | PSI                           | 5080        |                           |                    |
| Seal material             | Seal material                 | Mark        | Working temperature range | Remarks            |
|                           | Fluoro rubber                 | FKM (X-100) | -20°C to +180°C           | Standard material  |
| Working temperature range | Nitrile rubber                | NBR (SG)    | -20°C to +80°C            | Made-to-order item |

| Max. Tightening Torque |  | Nm (kgf-cm) |          |          |            |            |
|------------------------|--|-------------|----------|----------|------------|------------|
| Size (Thread)          |  | 1/4"        | 3/8"     | 1/2"     | 3/4"       | 1"         |
| Torque                 |  | 28 (286)    | 40 (408) | 80 (816) | 150 (1530) | 250 (2550) |

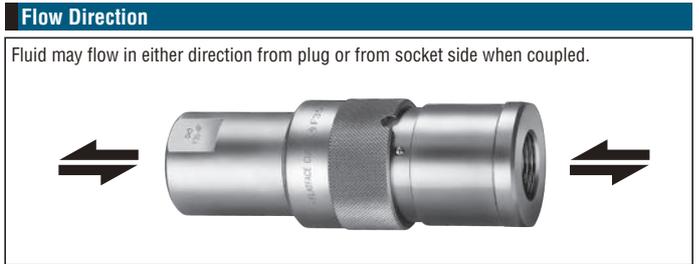

**Interchangeability**  
Different sizes can not be connected each other.

| Min. Cross-Sectional Area |  | (mm <sup>2</sup> ) |         |         |         |         |
|---------------------------|--|--------------------|---------|---------|---------|---------|
| Model                     |  | F35-2SP            | F35-3SP | F35-4SP | F35-6SP | F35-8SP |
| Min. cross-sectional area |  | 34.2               | 34.2    | 73.0    | 149.6   | 227.0   |


**Suitability for Vacuum**  
Not suitable for vacuum application in either connected or disconnected condition.

| Admixture of Air on Connection |  | (mL)    |         |         |         |         |
|--------------------------------|--|---------|---------|---------|---------|---------|
| Model                          |  | F35-2SP | F35-3SP | F35-4SP | F35-6SP | F35-8SP |
| Volume of air                  |  | 0.1     | 0.1     | 0.2     | 0.3     | 0.4     |

\*Spillage volume of liquid on each disconnection depends on usage conditions.

### Flow Rate – Pressure Loss Characteristics

[Test conditions] • Fluid : Hydraulic oil • Temperature : 30°C ± 5°C  
• Fluid viscosity : 32 × 10<sup>-6</sup> m<sup>2</sup>/s • Density : 0.87 × 10<sup>3</sup> kg/m<sup>3</sup>

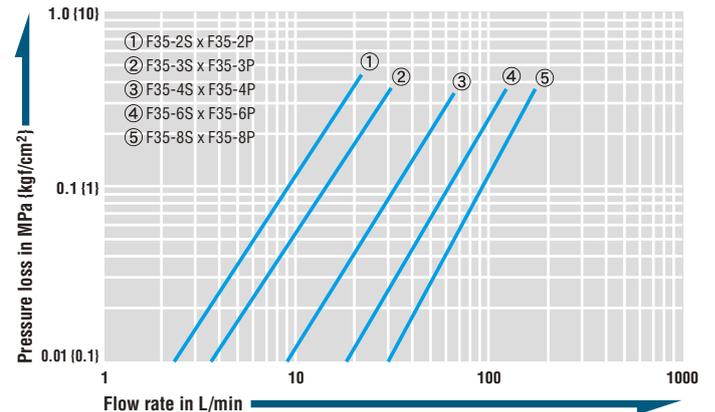


### ⚠ Precautions for use

Do not connect / disconnect Cuplas when pressure is applied or remaining.


**Models and Dimensions**

**Plug Female thread**

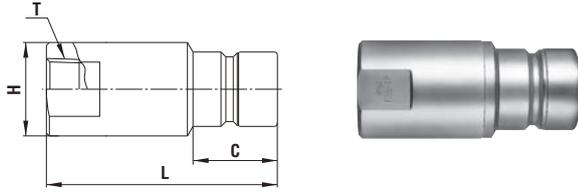

| Model  | Application | Mass (g) | Dimensions (mm) |      |            |        |
|--------|-------------|----------|-----------------|------|------------|--------|
|        |             |          | L               | C    | H(WAF)     | T      |
| F35-2P | R 1/4       | 106      | 58              | 18.8 | 19 x ø21.5 | Rc 1/4 |
| F35-3P | R 3/8       | 190      | 67.5            | 24   | 24 x ø27   | Rc 3/8 |
| F35-4P | R 1/2       | 290      | 78              | 28.5 | 27 x ø31.7 | Rc 1/2 |
| F35-6P | R 3/4       | 460      | 84.5            | 31   | 36 x ø40   | Rc 3/4 |
| F35-8P | R 1         | 1000     | 108             | 39   | 46 x ø50   | Rc 1   |

**Socket Female thread**

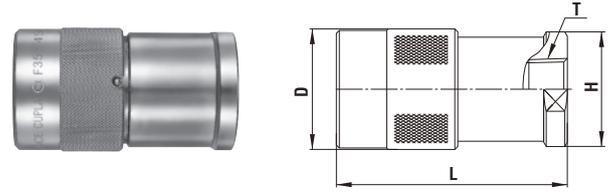

| Model  | Application | Mass (g) | Dimensions (mm) |      |            |        |
|--------|-------------|----------|-----------------|------|------------|--------|
|        |             |          | L               | øD   | H(WAF)     | T      |
| F35-2S | R 1/4       | 182      | (57.5)          | (28) | 26 x ø28.5 | Rc 1/4 |
| F35-3S | R 3/8       | 320      | (70)            | (34) | 30 x ø33   | Rc 3/8 |
| F35-4S | R 1/2       | 490      | (78)            | (41) | 36 x ø39   | Rc 1/2 |
| F35-6S | R 3/4       | 815      | (85)            | (49) | 46 x ø50   | Rc 3/4 |
| F35-8S | R 1         | 1520     | (104)           | (63) | 55 x ø62   | Rc 1   |

**Application Example**



Snow plow

For High Pressure

# Flat Face Cupla FF

For hydraulic pressure up to 35.0 MPa (357 kgf/cm<sup>2</sup>) with flat contact face

Working pressure



Valve structure



Applicable fluids



Compared with Nitto's conventional 35 MPa Cuplas, the flow volume is increased 1.5 to 2 times.

\*Increase ratio of each flow volume depends on the Cupla size.

- "Airless valve shut-off" design minimizes spillage volume on disconnection and admixture volume of air on connection.
  - Best suited for hydraulic lines with drastic high pressure pulsation such as in die-casting machines.
  - Sleeve stopper design preventing accidental disconnection under vibration or impacts enhances workability and safety.
  - Sizes are Rc 3/8, Rc 1/2, Rc 3/4, and Rc 1.
- \*Only the same size of socket and plug can be connected.



Offset concave flat face enables quick and smooth connection

## Unique flat face design

Concaved offset for the flat face on socket guides plug for quick and smooth centering and connection, but still easy to wipe off dirt and dusts.



Hexagon nut for easy mount

| Specifications            |   |      |     |   |
|---------------------------|---|------|-----|---|
| Body material             | Special steel (Autocatalytic nickel-phosphorus coating) |      |     |   |
| Size (Thread)             | 3/8", 1/2", 3/4", 1"                                    |      |     |   |
| Working pressure          | MPa   | 35.0 |     |   |
|                           | kgf/cm <sup>2</sup>                                     | 357  |     |   |
|                           | bar   | 350  |     |   |
|                           | PSI   | 5080 |     |   |
| Seal material             | Nitrile rubber  | Mark | NBR | Working temperature range: -20°C to +80°C<br>Remarks: Standard material |
| Working temperature range |   |      |     |   |

| Max. Tightening Torque |          |          |            | N m (kgf·cm) |
|------------------------|----------|----------|------------|--------------|
| Size (Thread)          | 3/8"     | 1/2"     | 3/4"       | 1"           |
| Torque                 | 40 (408) | 80 (816) | 150 (1530) | 250 (2550)   |

**Flow Direction**

Fluid may flow in either direction from plug or from socket side when coupled.

**Interchangeability**  
Different size socket and plug cannot be connected each other.

| Min. Cross-Sectional Area |               |               |               | (mm <sup>2</sup> ) |
|---------------------------|---------------|---------------|---------------|--------------------|
| Model                     | FF-3S x FF-3P | FF-4S x FF-4P | FF-6S x FF-6P | FF-8S x FF-8P      |
| Min. cross-sectional area | 51            | 106           | 215           | 332                |

**Suitability for Vacuum**  
Not suitable for vacuum application in either connected or disconnected condition.

| Admixture of Air on Connection |               |               |               | (mL)          |
|--------------------------------|---------------|---------------|---------------|---------------|
| Model                          | FF-3S x FF-3P | FF-4S x FF-4P | FF-6S x FF-6P | FF-8S x FF-8P |
| Volume of air admixture        | 0.018         | 0.029         | 0.033         | 0.080         |


\*Admixture volume of air on each connection depends on usage conditions.

| Volume of Spillage per Disconnection |               |               |               | (mL)          |
|--------------------------------------|---------------|---------------|---------------|---------------|
| Model                                | FF-3S x FF-3P | FF-4S x FF-4P | FF-6S x FF-6P | FF-8S x FF-8P |
| Volume of spillage                   | 0.009         | 0.023         | 0.031         | 0.110         |

\*Spillage volume of liquid on each disconnection depends on usage conditions.

## Flow Rate – Pressure Loss Characteristics

[Test conditions] • Fluid : Hydraulic oil • Temperature : 30°C ± 5°C  
• Fluid viscosity : 32 x 10<sup>-6</sup> m<sup>2</sup>/s • Density : 0.87 x 10<sup>3</sup> kg/m<sup>3</sup>

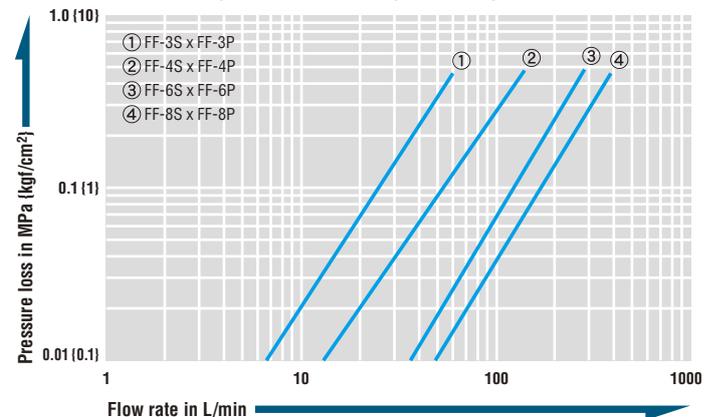


## ⚠ Precautions for use

Do not connect / disconnect Cuplas when pressure is applied or remaining.


**Models and Dimensions**

**Plug Female thread**

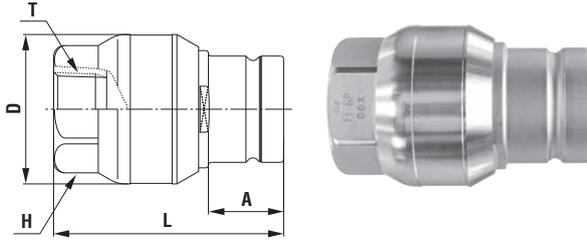

| Model | Application | Mass (g) | Dimensions (mm) |    |      |         |        |
|-------|-------------|----------|-----------------|----|------|---------|--------|
|       |             |          | L               | øD | A    | H (WAF) | T      |
| FF-3P | R 3/8       | 252      | (66)            | 34 | 20.5 | Hex.29  | Rc 3/8 |
| FF-4P | R 1/2       | 409      | (74)            | 42 | 22.8 | Hex.32  | Rc 1/2 |
| FF-6P | R 3/4       | 709      | (82.5)          | 54 | 27   | Hex.41  | Rc 3/4 |
| FF-8P | R 1         | 1314     | (96.5)          | 66 | 29.5 | Hex.54  | Rc 1   |


**Socket Female thread**

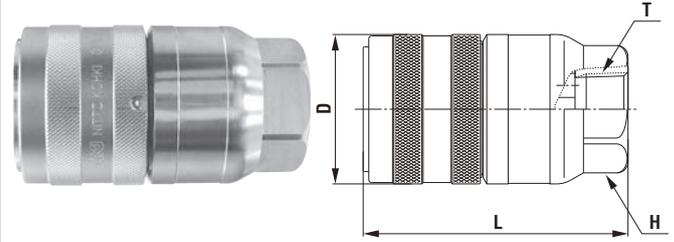

| Model | Application | Mass (g) | Dimensions (mm) |        |         |        |
|-------|-------------|----------|-----------------|--------|---------|--------|
|       |             |          | L               | øD     | H (WAF) | T      |
| FF-3S | R 3/8       | 345      | (71)            | (35.5) | Hex.29  | Rc 3/8 |
| FF-4S | R 1/2       | 608      | (84)            | (44)   | Hex.32  | Rc 1/2 |
| FF-6S | R 3/4       | 1053     | (95)            | (54)   | Hex.41  | Rc 3/4 |
| FF-8S | R 1         | 1865     | (109.5)         | (66)   | Hex.54  | Rc 1   |

**Applications**

- Hydraulic piping for die-casting machines
- Casting machines
- Electric furnaces
- Molding presses
- Forging press
- Powdery alloy presses
- Extrusion molding machines
- Machine tools
- Iron manufacturing blast furnaces
- Continuous casting machines
- Rolling mills
- Pipe forging machines
- Furnace opening / closing machines
- Glass molding machines, etc.

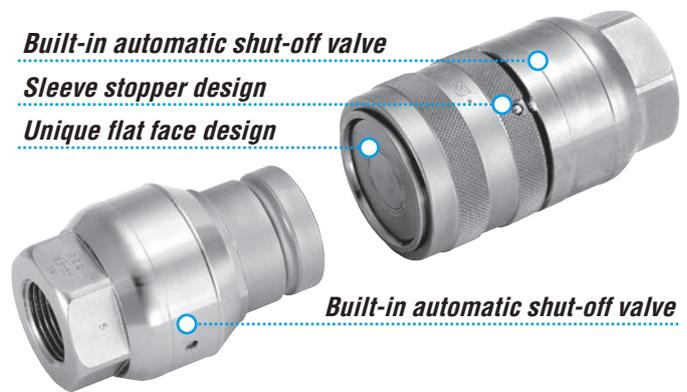

For High Pressure

# 450B Cupla

For hydraulic pressure up to 44.1 MPa {450 kgf/cm<sup>2</sup>}

Working pressure



Valve structure




Applicable fluids



**Metal-touch valve system with superior durability! Sleeve stopper mechanism gives secure connection.**

- Cupla for higher working pressure up to 44.1 MPa (450 kgf/cm<sup>2</sup>).
- Mechanism to prevent accidental disconnection ensures tight connection even under vibration or impact when connected.
- Both socket and plug have metal-touch automatic shut-off valves that prevent fluid spill out on disconnection.

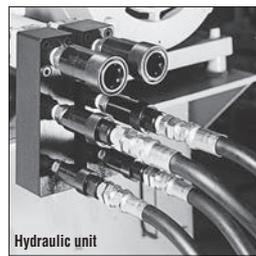


### Admixture of Air on Connection Admixture of air may vary depending upon the usage conditions. (mL)

| Model                   | 450B-3SP | 450B-4SP |
|-------------------------|----------|----------|
| Volume of air admixture | 1.43     | 3.44     |

### Models and Dimensions

#### Plug Female thread



| Model    | Application | Mass (g) | Dimensions (mm) |      |          |        |
|----------|-------------|----------|-----------------|------|----------|--------|
|          |             |          | L               | C    | H(WAF)   | T      |
| 450B-3P  | R 3/8       | 95       | 37.5            | 22.5 | 24 x ø28 | Rc 3/8 |
| 450B-4P* | R 1/2       | —        | 50              | 35   | 32 x ø35 | Rc 1/2 |

\* Made-to-order item

### Specifications

|   |  |             |                           |                    |
|---|--|-------------|---------------------------|--------------------|
| Body material                                     | Special steel (Nickel-plated)                  |             |                           |                    |
| Size (Thread)                                     | 3/8", 1/2"                                     |             |                           |                    |
| Working pressure                                  | MPa  | 44.1        |                           |                    |
|   | kgf/cm <sup>2</sup>                            | 450         |                           |                    |
|   | bar  | 441         |                           |                    |
|   | PSI  | 6400        |                           |                    |
| Seal material                                     | Seal material                                  | Mark        | Working temperature range | Remarks            |
|   | Nitrile rubber                                 | NBR (SG)    | -20°C to +80°C            | Standard material  |
| Working temperature range                         | Fluoro rubber                                  | FKM (X-100) | -20°C to +180°C           | Made-to-order item |
| Stand-alone leakage rate on either socket or plug | 0.1 mL/min at 0.3 MPa (3 kgf/cm <sup>2</sup> ) |             |                           |                    |

### Max. Tightening Torque

Nm {kgf·cm}

| Size (Thread) | 3/8"     | 1/2"     |
|---------------|----------|----------|
| Torque        | 40 {408} | 85 {867} |

### Flow Direction

Fluid may flow in either direction from plug or from socket side when coupled.



### Interchangeability

Different sizes are not interchangeable.

### Min. Cross-Sectional Area (mm<sup>2</sup>)

| Model                     | 450B-3SP | 450B-4SP |
|---------------------------|----------|----------|
| Min. cross-sectional area | 37       | 66       |


### Suitability for Vacuum

1.3 Pa (1 x 10<sup>-2</sup> mmHg)

| Socket only | Plug only | When connected |
|-------------|-----------|----------------|
| —           | —         | Operational    |


### Flow Rate – Pressure Loss Characteristics

[Test conditions] •Fluid : Hydraulic oil •Temperature : 25°C ± 5°C  
•Fluid viscosity : 32 x 10<sup>-6</sup> m<sup>2</sup>/s •Density : 0.87 x 10<sup>3</sup> kg/m<sup>3</sup>

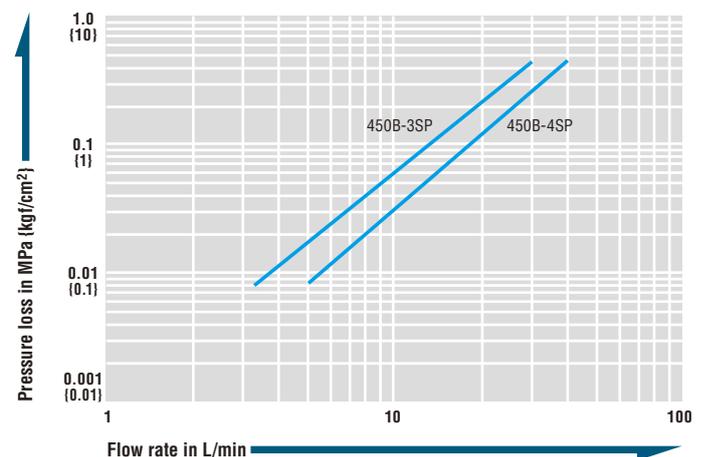

WAF : WAF stands for width across flats.

#### Socket Female thread

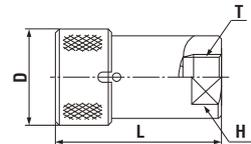

| Model    | Application | Mass (g) | Dimensions (mm) |      |        |        |
|----------|-------------|----------|-----------------|------|--------|--------|
|          |             |          | L               | øD   | H(WAF) | T      |
| 450B-3S  | R 3/8       | 285      | 59.5            | (36) | 24     | Rc 3/8 |
| 450B-4S* | R 1/2       | —        | 85              | (46) | 36     | Rc 1/2 |

\* Made-to-order item

Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.

For High Pressure

# 700R Cupla

For hydraulic pressure up to 68.6 MPa {700 kgf/cm<sup>2</sup>}

Working pressure

**68.6**

68.6 MPa  
(700 kgf/cm<sup>2</sup>)

Valve structure



Two-way shut-off


Applicable fluids



Hydraulic oil

High pressure Cupla for working pressures up to 68.6 MPa. Unique sleeve ring-lock system copes with vibration and impact when connected.

- Metal-touch valves use no rubber seal, and thus ensure excellent durability.
- Special sleeve ring-lock system maintains tight connection even under vibration or impact when connected.
- Both socket and plug have metal touch automatic shut-off valves that prevent fluid spill out on disconnection.

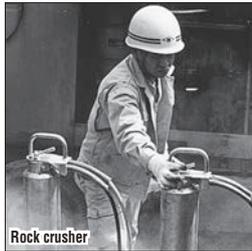

**Admixture of Air on Connection** Admixture of air may vary depending upon the usage conditions. (mL)

| Model                   | 700R-3SP | 700R-4SP |
|-------------------------|----------|----------|
| Volume of air admixture | 1.0      | 2.2      |

## Models and Dimensions

| Model   | Application | Mass (g) | Dimensions (mm) |    |      |        |        |
|---------|-------------|----------|-----------------|----|------|--------|--------|
|         |             |          | L               | C  | øD   | H(WAF) | T      |
| 700R-3P | R 3/8       | 210      | 54              | 18 | 39.5 | 24     | Rc 3/8 |
| 700R-4P | R 1/2       | 418      | 70              | 22 | 50   | 27     | Rc 1/2 |

## Specifications

|                           |   |  |                           |                    |
|---------------------------|---|--|---------------------------|--------------------|
| Body material             | Special steel (Nickel-plated)                     |  |                           |                    |
| Size (Thread)             | 3/8", 1/2"  |  |                           |                    |
| Working pressure          | MPa   | 68.6   |                           |                    |
|                           | kgf/cm <sup>2</sup>                               | 700  |                           |                    |
|                           | bar   | 686  |                           |                    |
|                           | PSI   | 9950   |                           |                    |
| Seal material             | Seal material                                     | Mark   | Working temperature range | Remarks            |
|                           | Nitrile rubber                                    | NBR (SG)   | -20°C to +80°C            | Standard material  |
| Working temperature range | Fluoro rubber                                     | FKM (X-100)  | -20°C to +180°C           | Made-to-order item |
|                           | Stand-alone leakage rate on either socket or plug | For 700R-3SP, 0.05 mL/min at 0.2 MPa (2 kgf/cm <sup>2</sup> )<br>For 700R-4SP, 0.05 mL/min at 0.3 MPa (3 kgf/cm <sup>2</sup> ) |                           |                    |

## Max. Tightening Torque

Nm (kgf·cm)

|               |          |          |
|---------------|----------|----------|
| Size (Thread) | 3/8"     | 1/2"     |
| Torque        | 40 {408} | 85 {867} |

## Flow Direction

Fluid may flow in either direction from plug or from socket side when coupled.



## Interchangeability

Different sizes are not interchangeable.

## Min. Cross-Sectional Area

(mm<sup>2</sup>)

| Model                     | 700R-3SP | 700R-4SP |
|---------------------------|----------|----------|
| Min. cross-sectional area | 34       | 55       |


## Suitability for Vacuum

1.3 Pa (1 x 10<sup>-2</sup> mmHg)

| Socket only | Plug only | When connected |
|-------------|-----------|----------------|
| —           | —         | Operational    |

## Flow Rate – Pressure Loss Characteristics

[Test conditions] • Fluid : Hydraulic oil • Temperature : 30°C ± 5°C  
• Fluid viscosity : 32 x 10<sup>-6</sup> m<sup>2</sup>/s • Density : 0.87 x 10<sup>3</sup> kg/m<sup>3</sup>

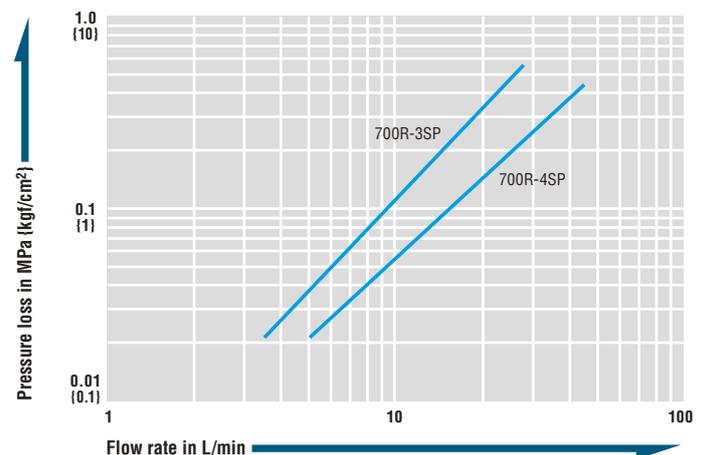

WAF : WAF stands for width across flats.

## Socket Female thread

| Model   | Application | Mass (g) | Dimensions (mm) |      |        |        |
|---------|-------------|----------|-----------------|------|--------|--------|
|         |             |          | L               | øD   | H(WAF) | T      |
| 700R-3S | R 3/8       | 270      | (73)            | 39.5 | 22     | Rc 3/8 |
| 700R-4S | R 1/2       | 562      | (91)            | 50   | 27     | Rc 1/2 |

Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.

# For Multi-Port Connection (Manual)

# Multi Cupla MAM Type

Multiple air port system

Working pressure



0.7 MPa  
(7 kgf/cm<sup>2</sup>)

Valve structure



One-way shut-off


Applicable fluid



Air

**Simultaneously connects several ports securely in one operation!  
Greatly cuts cycle time in multiple ports replacement.**

- Handles several ports at once.
- Simple action with lever enables easy connection / disconnection manually.
- Comes with lock mechanism to prevent accidental disconnection.
- Valve on socket side only.

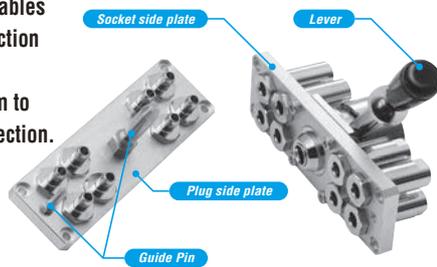

## Specifications

|                           |   |          |                           |
|---------------------------|---|----------|---------------------------|
| Body material             | Cupla : Brass (Chrome-plated)   |          |                           |
|                           | Plate : Aluminum alloy (4, 8, 12 ports) / Plate : Steel (16 ports)<br>Locking unit : Steel and others |          |                           |
| Size (Thread)             | Rc 1/8  |          |                           |
| Working pressure          | MPa   | 0.7      |                           |
|                           | kgf/cm <sup>2</sup>   | 7        |                           |
|                           | bar   | 7        |                           |
|                           | PSI   | 102      |                           |
| Seal material             | Nitrile rubber  | NBR (SG) | Working temperature range |
| Working temperature range | -20°C to +60°C  |          |                           |

## Max. Tightening Torque

Nm {kgf·cm}

|        |        |
|--------|--------|
| Torque | 5 {51} |
|--------|--------|

## Interchangeability

No connection is possible between plates with different number of ports.

## Min. Cross-Sectional Area

(mm<sup>2</sup>)

|          |      |
|----------|------|
| Per port | 15.9 |
|----------|------|


## Suitability for Vacuum

Not suitable for vacuum application in either connected or disconnected condition.

## Pressure - Flow Characteristics

Per port with Cupla

[Test conditions] • Fluid : Air • Temperature : Room temperature

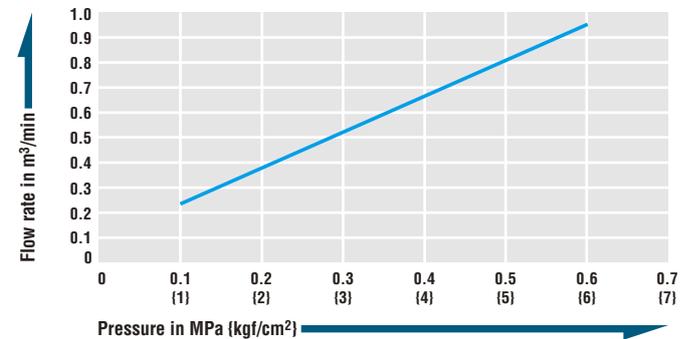

## Models and Dimensions

WAF : WAF stands for width across flats.








### Model MAM-1TP-4 × MAM-1S-4 (4 ports type)

Application: R 1/8 Mass: 150 g (Plug), 500 g (Socket)

Plug: Model MAM-1TP-4

Socket: Model MAM-1S-4

MAM-1TP-4 × MAM-1S-4  
(4 ports type)

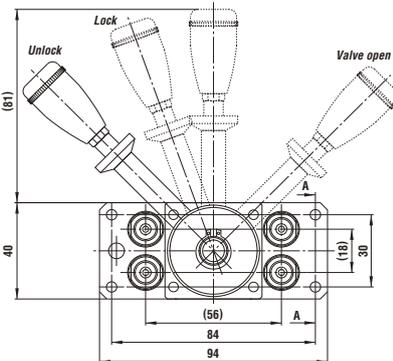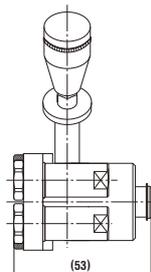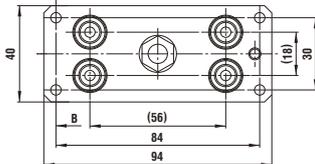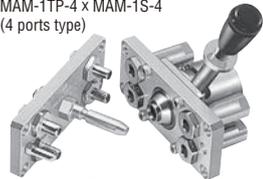

Dimensions (mm)







### Model MAM-1TP-8 × MAM-1S-8 (8 ports type)

Application: R 1/8 Mass: 250 g (Plug), 650 g (Socket)

Plug: Model MAM-1TP-8

Socket: Model MAM-1S-8

MAM-1TP-8 × MAM-1S-8  
(8 ports type)

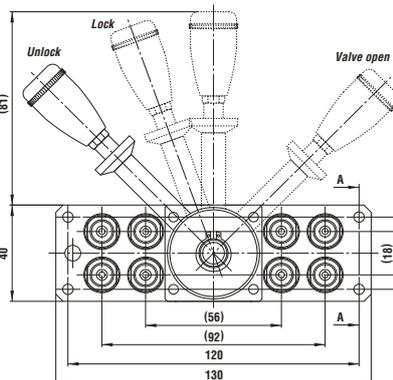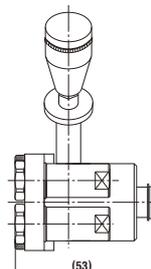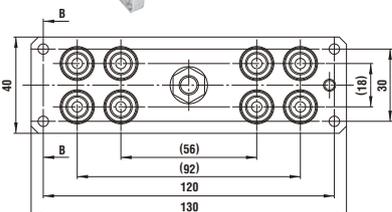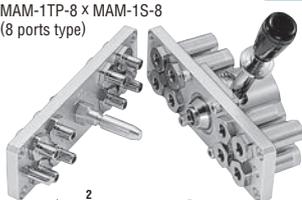

Dimensions (mm)

Models and Dimensions

Model MAM-1TP-12 x MAM-1S-12 (12 ports type)




Application: R 1/8

Mass: 350 g (Plug), 800 g (Socket)

Plug: Model




MAM-1TP-12

MAM-1TP-12 x MAM-1S-12  
(12 ports type)

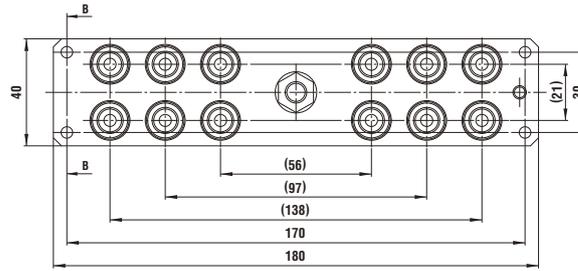

Socket: Model

MAM-1S-12

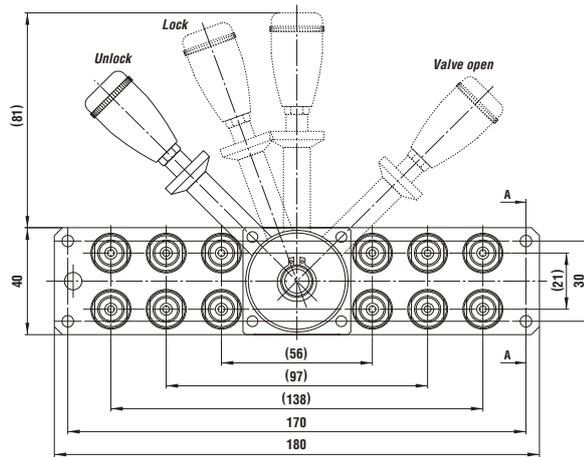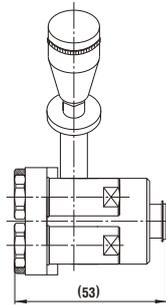

Dimensions (mm)

Model MAM-1TP-16 x MAM-1S-16 (16 ports type)




Application: R 1/8

Mass: 680 g (Plug), 1180 g (Socket)

Plug: Model




MAM-1TP-16

MAM-1TP-16 x MAM-1S-16  
(16 ports type)

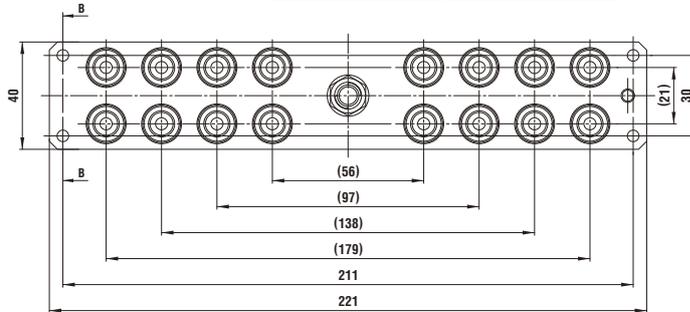

Socket: Model

MAM-1S-16

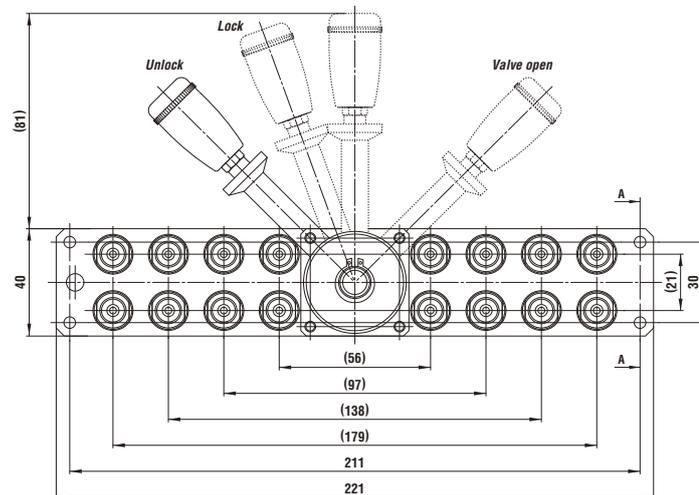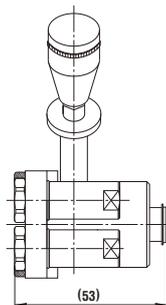

Dimensions (mm)

For Multi-Port Connection (Manual)

# Multi Cupla MAM-B Type

Multiple port system

Working pressure



Valve structure




Applicable fluid



**Simultaneously connects several ports securely in one operation. Greatly reduces changeover time in multiple ports replacement.**

- Handles several ports at once.
- Simple manual lever action completes easy connection / disconnection.
- Two-stage lever operation prevents Cupla from accidental dropping due to sudden detachment.
- Comes with lock mechanism to prevent accidental disconnection.
- Large flow equivalent to that of SP Cupla Type A.
- Two kinds of plates are available for each size.
- Automatic shut-off valves in both socket and plug prevent fluid spill out on disconnection.
- Self-aligned valve design provides safety sealing of individual socket or plug when disconnected.


**MAM-B-2P6 x MAM-B-2S6**  
(6 ports type)

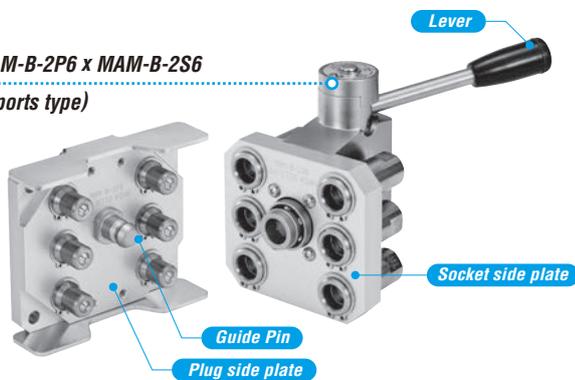

**MAM-B-1P8 x MAM-B-1S8**  
(8 ports type)



**MAM-B-1P12 x MAM-B-1S12**  
(12 ports type)

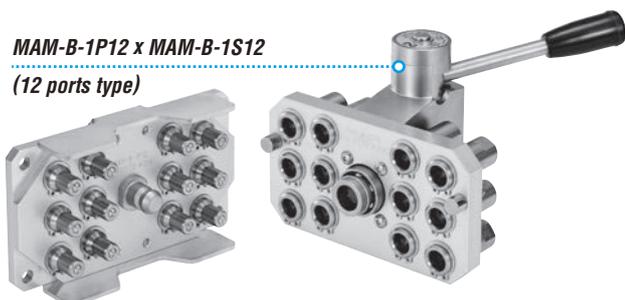

## Specifications

| Model                     | Plug                | MAM-B-1P8   | MAM-B-1P12                | MAM-B-2P6         | MAM-B-2P8 |
|---------------------------|---------------------|---|---------------------------|-------------------|-----------|
|                           | Socket              | MAM-B-1S8   | MAM-B-1S12                | MAM-B-2S6         | MAM-B-2S8 |
| Number of ports           |                     | 8   | 12                        | 6                 | 8         |
| Size (Thread)             |                     | 1/8"  |                           | 1/4"              |           |
| Body material             |                     | Cupla: Brass (Nickel-plated) Plate: Aluminum alloy<br>Locking unit: Steel (Autocatalytic nickel-phosphorus coating) |                           |                   |           |
| Working pressure          | MPa                 | 1.0   |                           |                   |           |
|                           | kgf/cm <sup>2</sup> | 10  |                           |                   |           |
|                           | bar                 | 10  |                           |                   |           |
|                           | PSI                 | 145   |                           |                   |           |
| Ambient temperature range |                     | 0°C to +60°C  |                           |                   |           |
| Sealing material          | Sealing material    | Mark  | Working temperature range | Remarks           |           |
| Working temperature range | Fluoro rubber       | FKM (X-100)   | -20°C to +180°C           | Standard material |           |

## Max. Tightening Torque

Nm (kgf·cm)

| Size (Thread) | 1/8"   | 1/4"   |
|---------------|--------|--------|
| Torque        | 5 {51} | 9 {92} |

## Interchangeability

No connection is possible between plates with different number of ports.

## Min. Cross-Sectional Area per Port

(mm<sup>2</sup>)

| Model                     | 1SP type | 2SP type |
|---------------------------|----------|----------|
| Min. cross-sectional area | 14       | 26       |

## Suitability for Vacuum

$1.3 \times 10^{-1}$  Pa ( $1 \times 10^{-3}$  mmHg)

| Socket only | Plug only | When connected |
|-------------|-----------|----------------|
| —           | —         | Operational    |

## Admixture of Air on Connection per Port

Admixture of air may vary depending upon the usage conditions. (mL)

| Model         | 1SP type | 2SP type |
|---------------|----------|----------|
| Volume of air | 0.6      | 1.1      |

## Volume of Spillage on Disconnection per Port


Volume of spillage may vary depending upon the usage conditions. (mL)

| Model              | 1SP type | 2SP type |
|--------------------|----------|----------|
| Volume of spillage | 0.4      | 0.8      |

## Flow Rate - Pressure Loss Characteristics

Per port of Cupla

[Test conditions] • Fluid : Water • Temperature : 25°C ± 5°C

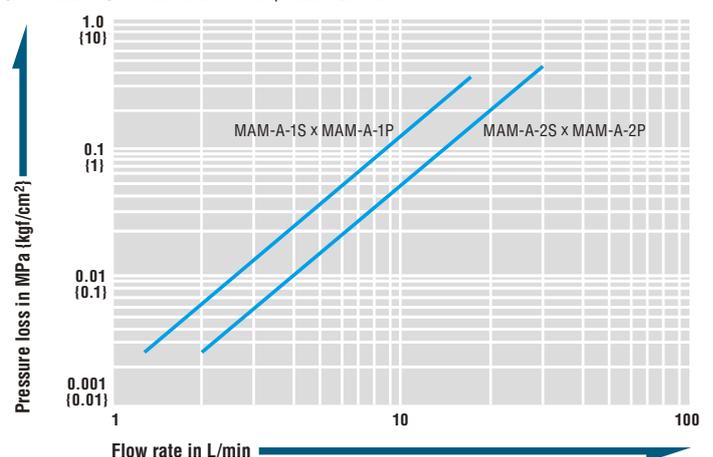




**Model MAM-B-2P6 × MAM-B-2S6 (6 ports type)**

• Application: R 1/4 Mass: 740 g (Plug), 1280 g (Socket)

Plug: Model **MAM-B-2P6**

Socket: Model **MAM-B-2S6**

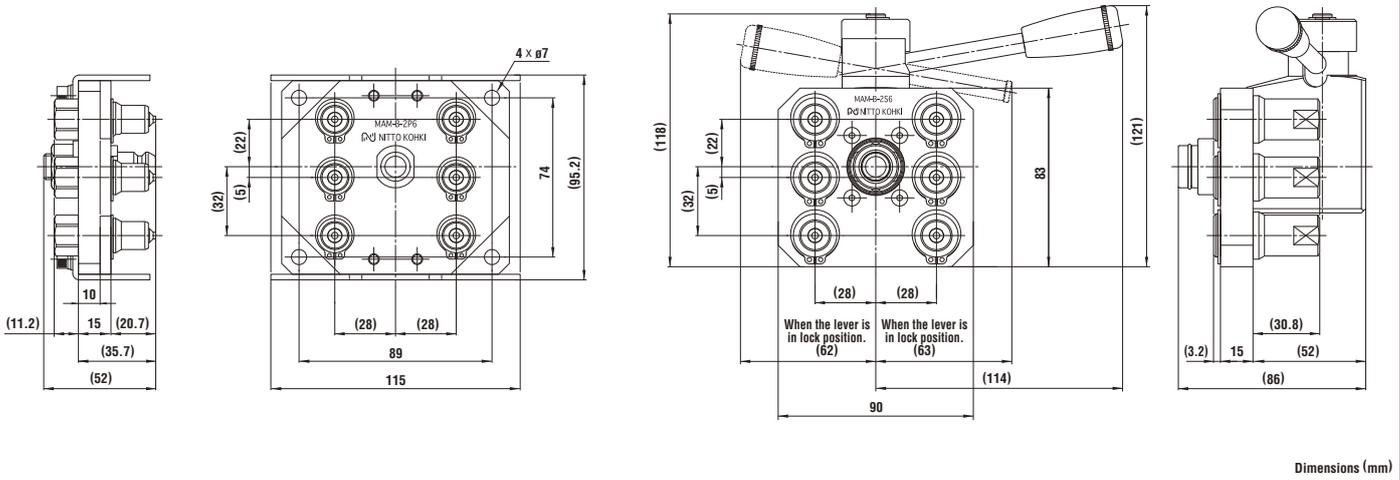


Dimensions (mm)

**Model MAM-B-2P8 × MAM-B-2S8 (8 ports type)**

• Application: R 1/4 Mass: 920 g (Plug), 1550 g (Socket)

Plug: Model **MAM-B-2P8**


Socket: Model **MAM-B-2S8**

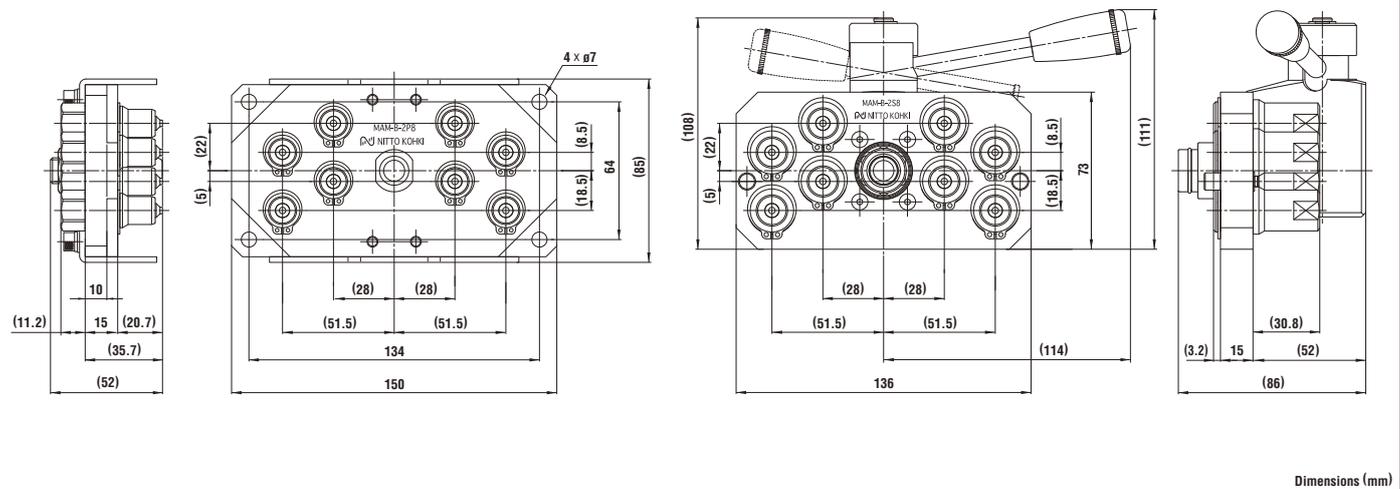

Dimensions (mm)

**Plug Model MAM-A-2P (Individual Cupla)**


• Application: R 1/4 Mass: 40 g  
• Can be mounted on model MAM-B-2P6 and MAM-B-2P8.

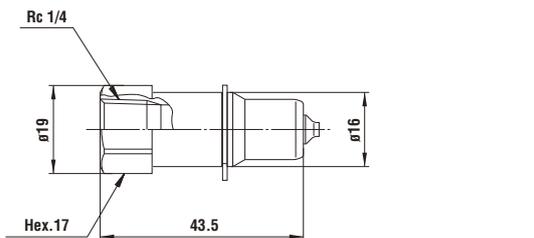

Dimensions (mm)

**Socket Model MAM-A-2S (Individual Cupla)**

• Application: R 1/4 Mass: 82 g  
• Can be mounted on model MAM-B-2S6 and MAM-B-2S8.

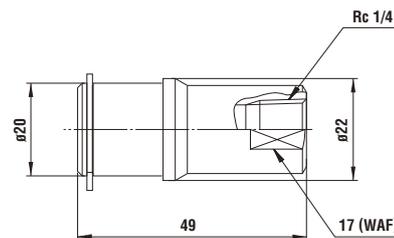


Dimensions (mm)

Made-to-order Multi Cuplas are available on request, such as a combination of different sizes on the flange plate.

Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.

# MULTI CUPLA SERIES

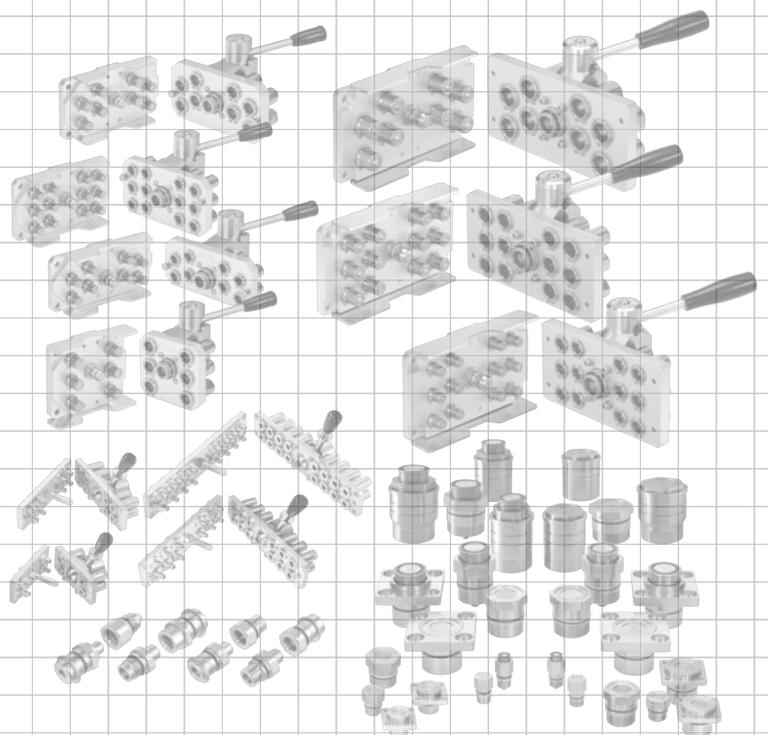

For Multi-Port Connection (Manual)

# Multi Cupla MAM-A Type

Multiple port system

Working pressure



Valve structure






Applicable fluid



**Simultaneously connects several ports securely in one operation!  
Greatly reduces changeover time in multiple ports replacement.**

- Handles several ports at once.
- Simple manual lever action completes easy connection / disconnection.
- Two-stage lever operation prevents Cupla from accidental dropping due to sudden detachment.
- Comes with lock mechanism to prevent accidental disconnection.
- Large flow equivalent to that of SP Cupla Type A.
- Two kinds of plates are available for each size.
- Automatic shut-off valves in both socket and plug prevent fluid spill out on disconnection.
- Self-aligned valve design provides safety sealing of individual socket or plug when disconnected.

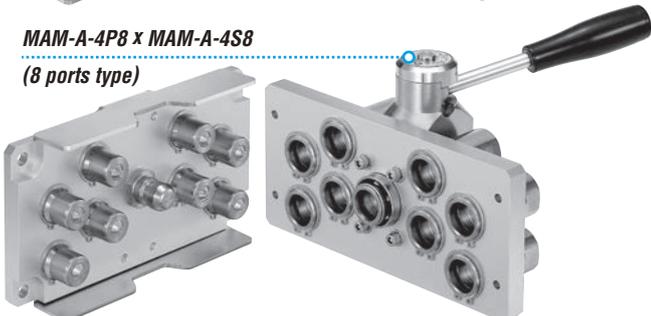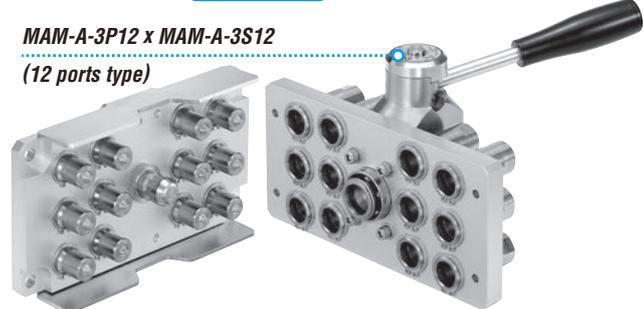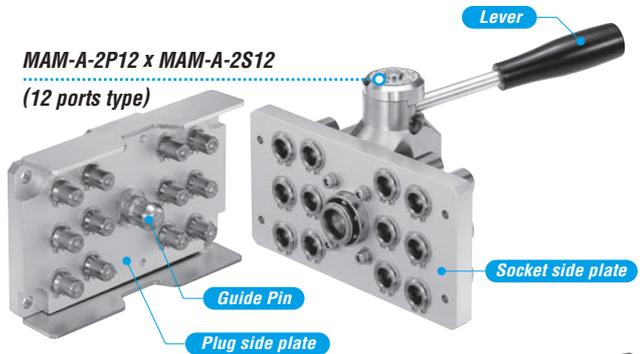

## Specifications

| Model                     | Plug                | MAM-A-2P6   | MAM-A-2P12 | MAM-A-3P6 | MAM-A-3P12  | MAM-A-4P4             | MAM-A-4P8                 |                 |  |         |                   |
|---------------------------|---------------------|---|------------|-----------|-------------|-----------------------|---------------------------|-----------------|--|---------|-------------------|
|                           | Socket              | MAM-A-2S6   | MAM-A-2S12 | MAM-A-3S6 | MAM-A-3S12  | MAM-A-4S4             | MAM-A-4S8                 |                 |  |         |                   |
| Number of ports           |                     | 6   | 12         | 6         | 12          | 4                     | 8                         |                 |  |         |                   |
| Size (Thread)             |                     | 1/4"  |            | 3/8"      |             | 1/2"                  |                           |                 |  |         |                   |
| Body material             |                     | Cupla: Brass (Nickel-plated)                                  |            |           |             | Plate: Aluminum alloy |                           |                 |  |         |                   |
|                           |                     | Locking unit: Steel (Autocatalytic nickel-phosphorus coating) |            |           |             |                       |                           |                 |  |         |                   |
| Working pressure          | MPa                 | 1.0   |            |           |             |                       |                           |                 |  |         |                   |
|                           | kgf/cm <sup>2</sup> | 10  |            |           |             |                       |                           |                 |  |         |                   |
|                           | bar                 | 10  |            |           |             |                       |                           |                 |  |         |                   |
|                           | PSI                 | 145   |            |           |             |                       |                           |                 |  |         |                   |
| Ambient temperature range |                     | 0°C to +60°C  |            |           |             |                       |                           |                 |  |         |                   |
| Sealing material          | Sealing material    | Fluoro rubber   |            | Mark      | FKM (X-100) |                       | Working temperature range | -20°C to +180°C |  | Remarks | Standard material |

## Max. Tightening Torque

Nm (kgf·cm)

| Size (Thread) | 1/4"   | 3/8"     | 1/2"     |
|---------------|--------|----------|----------|
| Torque        | 9 (92) | 12 (122) | 30 (306) |

## Interchangeability

No connection is possible between plates with different number of ports.

## Min. Cross-Sectional Area per Port

(mm<sup>2</sup>)

| Model                     | 2SP type | 3SP type | 4SP type |
|---------------------------|----------|----------|----------|
| Min. cross-sectional area | 26       | 51       | 73       |

## Suitability for Vacuum

1.3 x 10<sup>-1</sup> Pa (1 x 10<sup>-3</sup> mmHg)

| Socket only | Plug only | When connected |
|-------------|-----------|----------------|
| —           | —         | Operational    |

## Admixture of Air on Connection per Port

Admixture of air may vary depending upon the usage conditions. (mL)

| Model         | 2SP type | 3SP type | 4SP type |
|---------------|----------|----------|----------|
| Volume of air | 1.1      | 2.7      | 3.9      |

## Volume of Spillage on Disconnection per Port


Volume of spillage may vary depending upon the usage conditions. (mL)

| Model              | 2SP type | 3SP type | 4SP type |
|--------------------|----------|----------|----------|
| Volume of spillage | 0.8      | 2.1      | 3.4      |

## Flow Rate - Pressure Loss Characteristics

Per port of Cupla

[Test conditions] • Fluid : Water • Temperature : 25°C ± 5°C

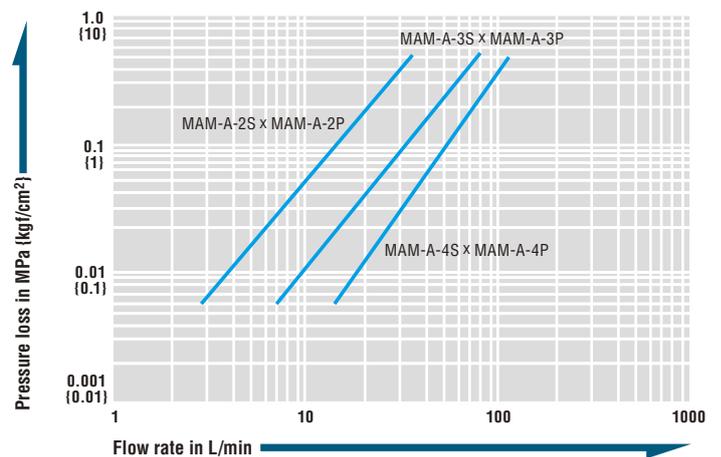



Models and Dimensions

Model MAM-A-2P6 × MAM-A-2S6 (6 ports type)

• Application: R 1/4 Mass: 1100 g (Plug), 2150 g (Socket)

Plug: Model MAM-A-2P6

Socket: Model MAM-A-2S6

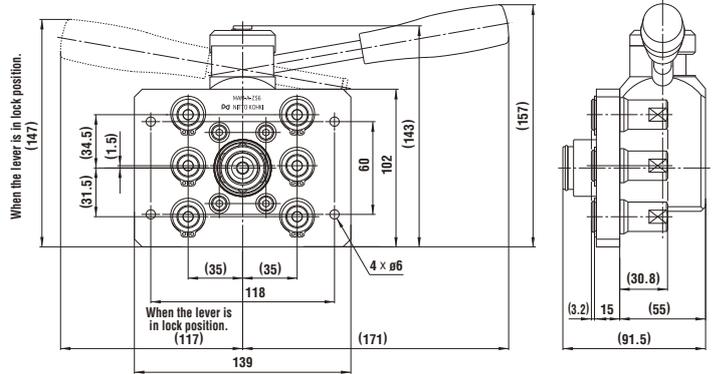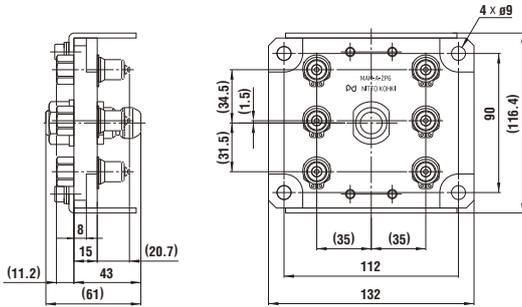



Dimensions (mm)

Model MAM-A-2P12 × MAM-A-2S12 (12 ports type)

• Application: R 1/4 Mass: 1650 g (Plug), 2800 g (Socket)

Plug: Model MAM-A-2P12


Socket: Model MAM-A-2S12

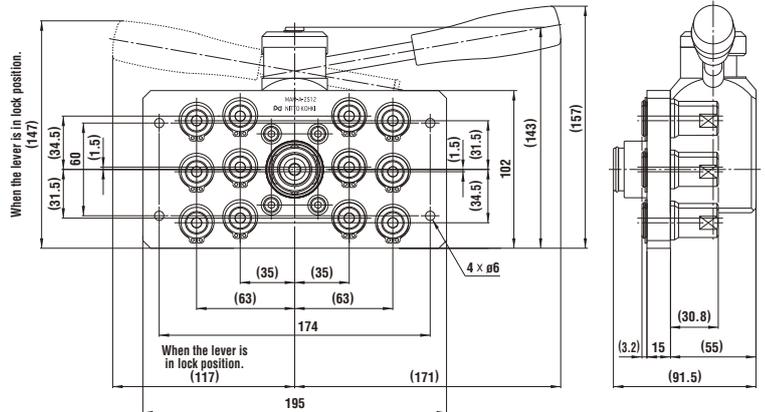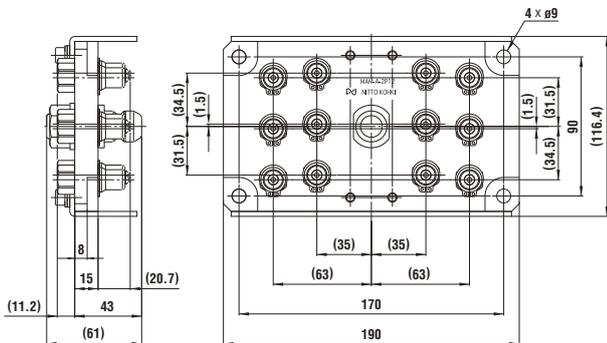

Dimensions (mm)

Plug Model MAM-A-2P (Individual Cupla)


• Application: R 1/4 Mass: 40 g

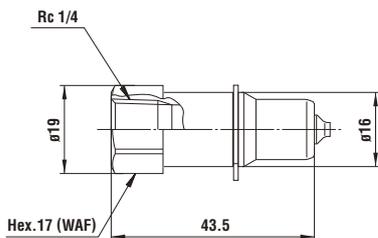

Dimensions (mm)

Socket Model MAM-A-2S (Individual Cupla)

• Application: R 1/4 Mass: 82 g

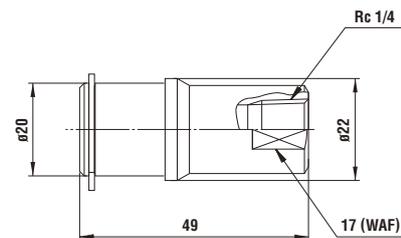

Dimensions (mm)

Made-to-order Multi Cuplas are available on request, such as a combination of different sizes on the flange plate.



Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.

**Model MAM-A-3P6 × MAM-A-3S6 (6 ports type)**

• Application: R 3/8 Mass: 1250 g (Plug), 2400 g (Socket)

Plug: Model **MAM-A-3P6**

Socket: Model **MAM-A-3S6**

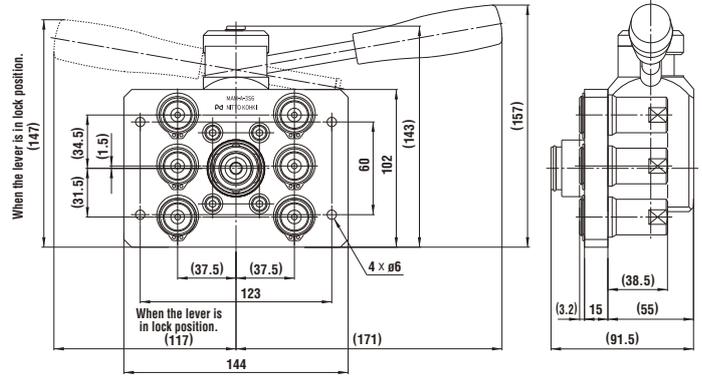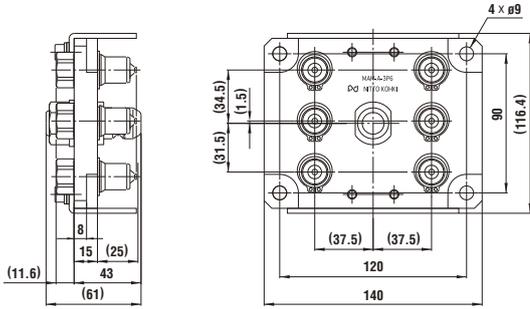



Dimensions (mm)

**Model MAM-A-3P12 × MAM-A-3S12 (12 ports type)**

• Application: R 3/8 Mass: 1950 g (Plug), 3300 g (Socket)

Plug: Model **MAM-A-3P12**


Socket: Model **MAM-A-3S12**

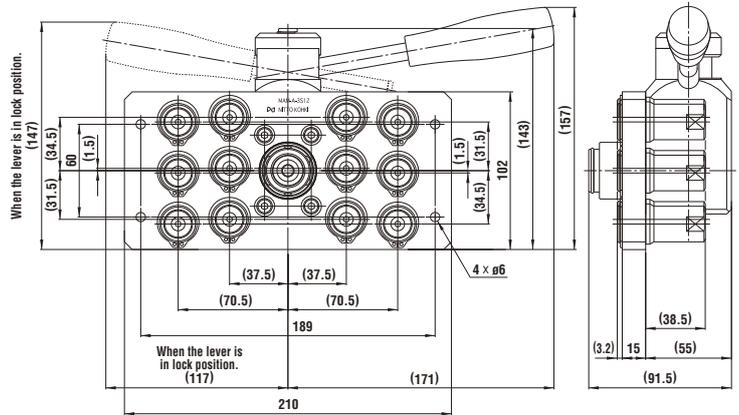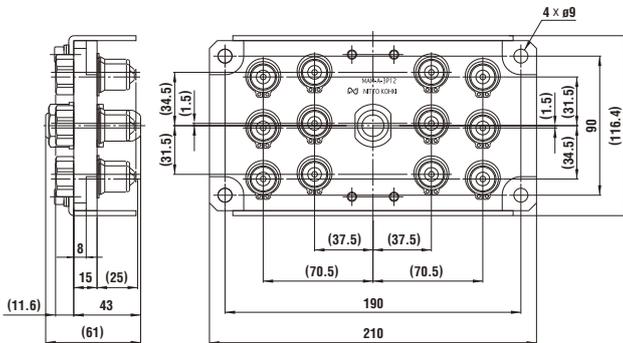

Dimensions (mm)

**Plug Model MAM-A-3P (Individual Cupla)**


• Application: R 3/8 Mass: 62 g

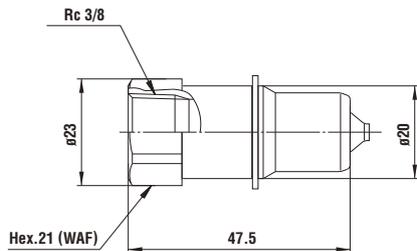

Dimensions (mm)

**Socket Model MAM-A-3S (Individual Cupla)**

• Application: R 3/8 Mass: 122 g

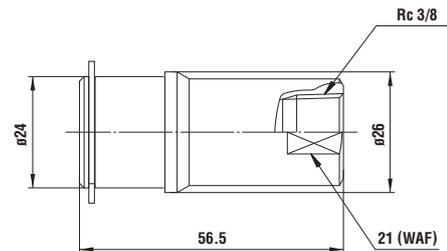

Dimensions (mm)

Made-to-order Multi Cuplas are available on request, such as a combination of different sizes on the flange plate.

Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.



Models and Dimensions

**Model MAM-A-4P4 × MAM-A-4S4 (4 ports type)**

• Application: R 1/2 Mass: 1400 g (Plug), 2700 g (Socket)

Plug: Model **MAM-A-4P4**

Socket: Model **MAM-A-4S4**

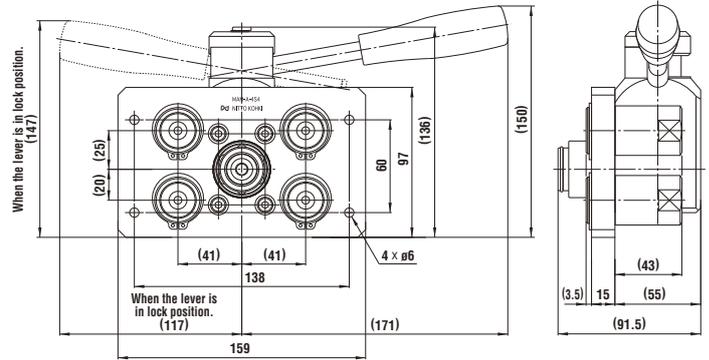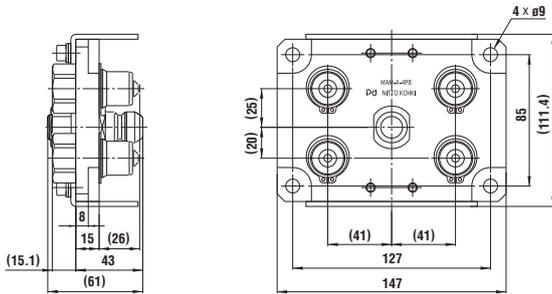



Dimensions (mm)

**Model MAM-A-4P8 × MAM-A-4S8 (8 ports type)**

• Application: R 1/2 Mass: 2300 g (Plug), 4000 g (Socket)

Plug: Model **MAM-A-4P8**


Socket: Model **MAM-A-4S8**

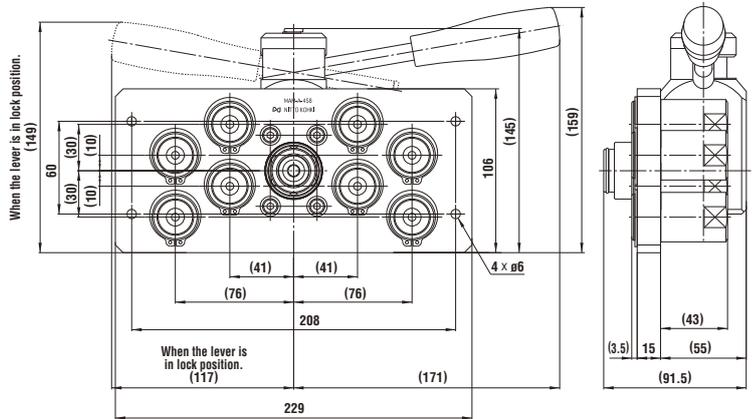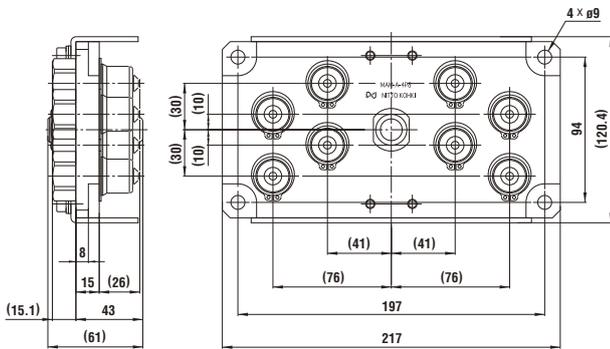

Dimensions (mm)

**Plug Model MAM-A-4P (Individual Cupla)**


• Application: R 1/2 Mass: 127 g

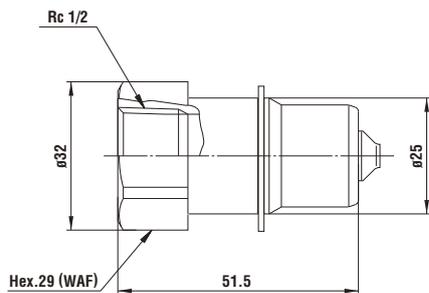

Dimensions (mm)

**Socket Model MAM-A-4S (Individual Cupla)**

• Application: R 1/2 Mass: 256 g

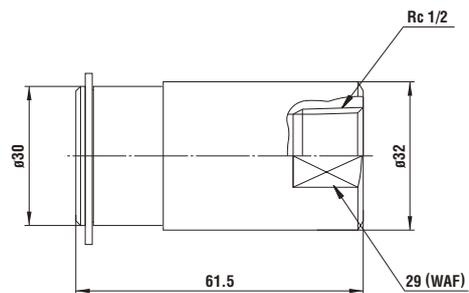

Dimensions (mm)

Made-to-order Multi Cuplas are available on request, such as a combination of different sizes on the flange plate.

Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.

For Multi-Port Connection (Automatic)

# Multi Cupla MAS Type / MAT Type

7.0 MPa (71 kgf/cm<sup>2</sup>) general purpose type

Working pressure



Valve structure



Applicable fluids



## Connects multiple lines simultaneously with a single operation for different fluids and sizes.

- Ideal for automated hydraulic or pneumatic cylinder operated systems that need to connect and disconnect several lines simultaneously.
- Automatic shut-off valves in both sockets and plugs ensure no outflow of fluid on disconnection.
- Body materials other than stainless steel are available, which can be ordered with or without valves (made-to-order products).
- Snap ring and screw thread-in types to mount on the base plate are standardized.
- MAS type can accept axial eccentricity between socket and plug.  
The allowance of eccentricity is within the radius range of 0.3mm.

\* Cupla connection or disconnection with fluid under dynamic pressure cannot be made.



### Specifications

|                           |   |             |                           |
|---------------------------|---|-------------|---------------------------|
| Body material             | Stainless steel (Autocatalytic nickel-phosphorus coating) |             |                           |
| Working pressure          | MPa   | 7.0         |                           |
|                           | kgf/cm <sup>2</sup>                                       | 71          |                           |
|                           | bar   | 70          |                           |
|                           | PSI   | 1020        |                           |
| Sealing material          | Sealing material  | Mark        | Working temperature range |
| Working temperature range | Fluoro rubber   | FKM (X-100) | -20°C to +180°C           |

### Max. Tightening Torque Nm (kgf·cm)

| Size (Thread)     | 1/4"     | 3/8"     | 1/2"     | 3/4"     | 1"         |
|-------------------|----------|----------|----------|----------|------------|
| Torque (MAS type) | 14 (143) | 22 (224) | 60 (612) | 90 (918) | 120 (1224) |
| Size (Thread)     | M20      | M24      | M30      | M39      | M45        |
| Torque (MAT type) | 50 (510) | 50 (510) | 50 (510) | 70 (714) | 80 (816)   |

### Interchangeability

- MAS & MAT or MAS & MAS types of the same size are to be connected.
- Connection between the same MAT types is virtually not possible because there is no allowance for eccentricity.

### Min. Cross-Sectional Area (mm<sup>2</sup>)

| Model                     | 2SP | 3SP | 4SP | 6SP | 8SP |
|---------------------------|-----|-----|-----|-----|-----|
| Min. cross-sectional area | 23  | 41  | 76  | 145 | 224 |

### Suitability for Vacuum 1.3 x 10<sup>-1</sup> Pa (1 x 10<sup>-3</sup> mmHg)

| Socket only | Plug only | When connected |
|-------------|-----------|----------------|
| —           | —         | Operational    |

### Admixture of Air on Connection Admixture of air may vary depending upon the usage conditions. (mL)

| Model         | 2SP | 3SP | 4SP | 6SP  | 8SP  |
|---------------|-----|-----|-----|------|------|
| Volume of air | 1.1 | 2.4 | 3.2 | 10.5 | 17.0 |


### Load Required to Maintain Connection When Line Is Pressurized

| Model   | 2SP                   | 3SP                | 4SP                   | 6SP                  | 8SP                     |
|---|-----------------------|--------------------|-----------------------|----------------------|-------------------------|
| Maximum acceptable load N (kgf)                       | 3200 (327)            | 5200 (531)         | 9000 (919)            | 13900 (1419)         | 20200 (2062)            |
| Minimum load required to maintain connection N (kgf)* | Px185+45 (p×1.85+4.5) | Px310+70 (p×3.1+7) | Px545+75 (p×5.45+7.5) | Px850+95 (p×8.5+9.5) | Px1225+120 (p×12.25+12) |


\* Assign the actual value of pressure [P (MPa), p (kgf/cm<sup>2</sup>)] to the above formula to calculate the load. Maintain the connection with the minimum load or more, but not more than the maximum acceptable load.

### Flow Rate - Pressure Loss Characteristics

[Test conditions] • Fluid : Water • Temperature : 20°C ± 5°C

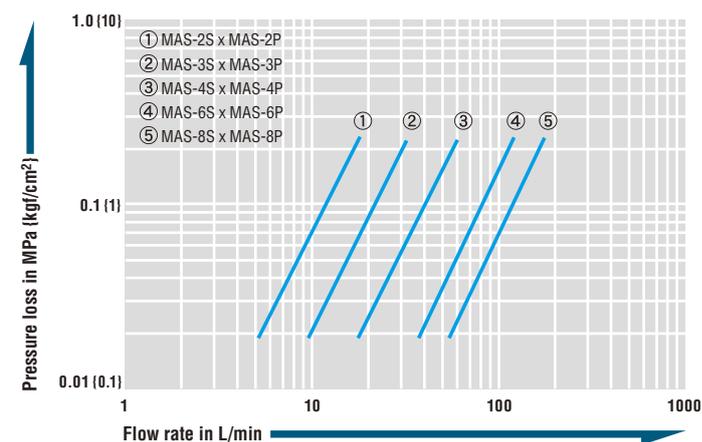


### Application Example

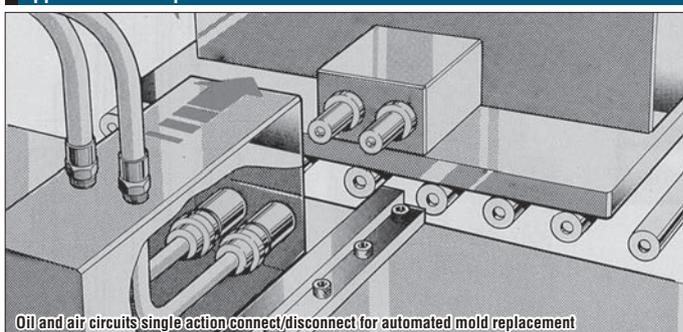


Models and Dimensions

**Plug** MAS type (Snap ring mount type)

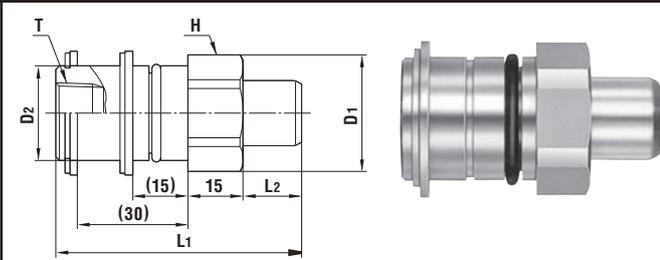


| Model  | Application | Mass (g) | Dimensions (mm) |      |     |      |        |        |  |
|--------|-------------|----------|-----------------|------|-----|------|--------|--------|--|
|        |             |          | L1              | L2   | øD1 | øD2  | H(WAF) | T      |  |
| MAS-2P | R 1/4       | 150      | 65              | 14   | 28  | 21.9 | Hex.26 | Rc 1/4 |  |
| MAS-3P | R 3/8       | 203      | 67              | 16   | 35  | 25.9 | Hex.32 | Rc 3/8 |  |
| MAS-4P | R 1/2       | 412      | 73              | 20   | 44  | 35.9 | Hex.41 | Rc 1/2 |  |
| MAS-6P | R 3/4       | 579      | 76.5            | 23.5 | 50  | 41.9 | Hex.46 | Rc 3/4 |  |
| MAS-8P | R 1         | 720      | 78              | 24   | 58  | 47.9 | Hex.54 | Rc 1   |  |

**Socket** MAS type (Snap ring mount type)

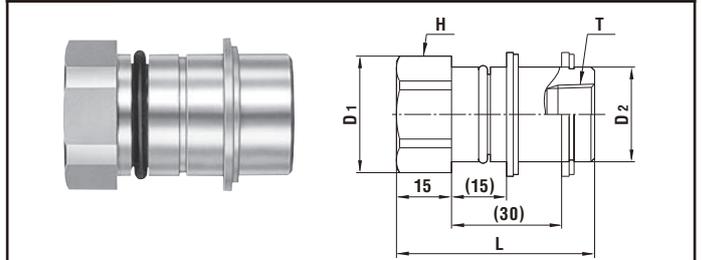


| Model  | Application | Mass (g) | Dimensions (mm) |     |      |        |        |
|--------|-------------|----------|-----------------|-----|------|--------|--------|
|        |             |          | L               | øD1 | øD2  | H(WAF) | T      |
| MAS-2S | R 1/4       | 126      | 51.5            | 28  | 21.9 | Hex.26 | Rc 1/4 |
| MAS-3S | R 3/8       | 171      | 55              | 35  | 25.9 | Hex.32 | Rc 3/8 |
| MAS-4S | R 1/2       | 406      | 65              | 44  | 35.9 | Hex.41 | Rc 1/2 |
| MAS-6S | R 3/4       | 604      | 76              | 50  | 41.9 | Hex.46 | Rc 3/4 |
| MAS-8S | R 1         | 825      | 87              | 58  | 47.9 | Hex.54 | Rc 1   |

**Plug** MAT type (Thread screw mount type)

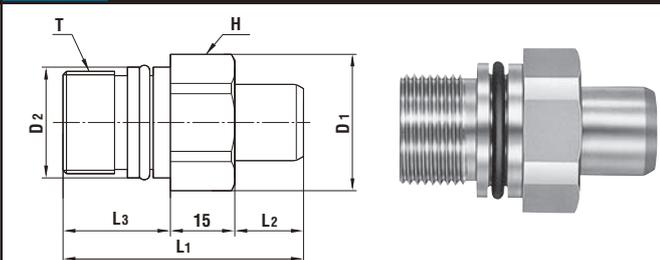

| Model  | Application            | Mass (g) | Dimensions (mm) |      |        |     |      |        |         |
|--------|------------------------|----------|-----------------|------|--------|-----|------|--------|---------|
|        |                        |          | L1              | L2   | L3     | øD1 | øD2  | H(WAF) | T       |
| MAT-2P | See the diagram below. | 121      | 53              | 14   | (24)   | 28  | 21.9 | Hex.26 | M20x1.5 |
| MAT-3P |                        | 164      | 56              | 16   | (25)   | 32  | 25.9 | Hex.29 | M24x1.5 |
| MAT-4P |                        | 332      | 67              | 20   | (32)   | 44  | 35.9 | Hex.41 | M30x2   |
| MAT-6P |                        | 453      | 73              | 23.5 | (34.5) | 50  | 41.9 | Hex.46 | M39x2   |
| MAT-8P |                        | 571      | 76              | 24   | (37)   | 54  | 47.9 | Hex.50 | M45x2   |

**Socket** MAT type (Thread screw mount type)

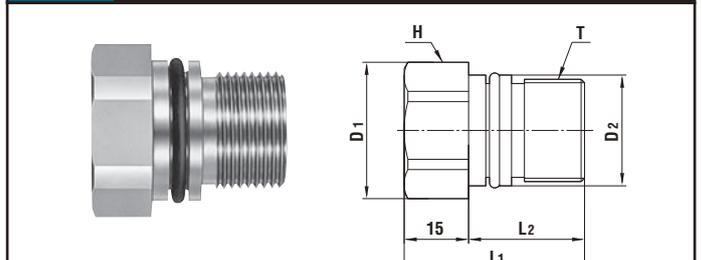

| Model  | Application            | Mass (g) | Dimensions (mm) |      |     |      |        |         |
|--------|------------------------|----------|-----------------|------|-----|------|--------|---------|
|        |                        |          | L1              | L2   | øD1 | øD2  | H(WAF) | T       |
| MAT-2S | See the diagram below. | 95       | 39              | (24) | 28  | 21.9 | Hex.26 | M20x1.5 |
| MAT-3S |                        | 124      | 42              | (27) | 32  | 25.9 | Hex.29 | M24x1.5 |
| MAT-4S |                        | 246      | 48              | (33) | 44  | 35.9 | Hex.41 | M30x2   |
| MAT-6S |                        | 382      | 58              | (43) | 50  | 41.9 | Hex.46 | M39x2   |
| MAT-8S |                        | 506      | 66              | (51) | 54  | 47.9 | Hex.50 | M45x2   |

• MAT type must be coupled with MAS type.

Tail End Configuration

**MAS Type**

Mount MAS tail end from this side →

| Model           | Diameter (mm) |   |
|-----------------|---------------|---|
|                 | øD            | T |
| MAS-2S / MAS-2P | 23            |   |
| MAS-3S / MAS-3P | 27            |   |
| MAS-4S / MAS-4P | 37            |   |
| MAS-6S / MAS-6P | 43            |   |
| MAS-8S / MAS-8P | 49            |   |

**MAT Type**

| Model           | Diameter (mm)                    |    |      |    |           |
|-----------------|----------------------------------|----|------|----|-----------|
|                 | øA                               | G  | F    | T  |           |
| MAT-2S / MAT-2P | 22 <sup>+0.06</sup> <sub>0</sub> | 13 | 25   | 28 | M20 x 1.5 |
| MAT-3S / MAT-3P | 26 <sup>+0.06</sup> <sub>0</sub> | 13 | 26   | 28 | M24 x 1.5 |
| MAT-4S / MAT-4P | 36 <sup>+0.08</sup> <sub>0</sub> | 16 | 34   | 35 | M30 x 2   |
| MAT-6S / MAT-6P | 42 <sup>+0.08</sup> <sub>0</sub> | 17 | 36.5 | 45 | M39 x 2   |
| MAT-8S / MAT-8P | 48 <sup>+0.08</sup> <sub>0</sub> | 17 | 39   | 53 | M45 x 2   |

14.0 MPa (142 kgf/cm<sup>2</sup>) Airless Type

**Multi Cupla**

MALS Type / MALT Type

Working pressure: 14.0 MPa (142 kgf/cm<sup>2</sup>)

Valve structure: Two-way shut-off

Applicable fluids: Air, Hydraulic oil

MALS (Snap ring mount) type (Plug)

MALT (Thread screw mount) type (Plug)

MALT (Thread screw mount) type (Socket)

MALS (Snap ring mount) type (Socket)

Minimal air admixture during Cupla connection

- Special valve structure allows minimal air admixture in fluid lines during Cupla connection.
- Liquid bleeding on Cuplas disconnection is very little, which makes it best for frequent connection/disconnection applications.
- Snap ring and thread screw mount types to mount on the base plate are standard.
- MALS type can accept axial eccentricity of socket and plug, or allow a plate hole position tolerance of ±0.3mm because of the O-ring around the body.

Specifications

|                           |   |             |                           |
|---------------------------|---|-------------|---------------------------|
| Body material             | Steel (Autocatalytic nickel-phosphorus coating)       |             |                           |
| Working pressure          | 14.0 MPa, 142 kgf/cm <sup>2</sup> , 140 bar, 2030 PSI |             |                           |
| Sealing material          | Fluoro rubber   | FKM (X-100) | Working temperature range |
| Working temperature range | -20°C to +180°C                                       |             |                           |

Please check with us for details on these products.

For Multi-Port Connection (Automatic)

# Multi Cupla

**MALC-SP Type** for Medium Pressure Use

Low spill type for medium pressure use

Working pressure



1.5 to 7.0 MPa  
(15 to 71 kgf/cm<sup>2</sup>)

Valve structure



Two-way shut-off  
(Non-Spill)

Applicable fluids



Water

Hydraulic oil

Air

A single operation enables simultaneous connections of multiple lines. A special design for medium pressure use minimizes air admixture in fluid lines upon connection.

- Compared with conventional Multi Cuplas, approximately double flow rates are realized. This could reduce the size of required plates. (Rate of flow increase depends on Cupla sizes.)
- The MALC type realizes a 2 mm axial eccentricity allowance, while the conventional Multi Cupla is only 0.6 mm.
- Special valve design enables connection of socket and plug under pressure of up to 2 MPa. (up to 1.5 MPa for MALC-12SP.)
- When connected, the distance between the socket plate and the plug plate is designed to be 30 mm for all sizes. This means that any size of Cupla can be mounted and used on the same plate.
- Low spill valves minimize outflow of fluid and admixture of air into the fluid line.



MALC-SP (Thread screw mount) type  
(Plug)

MALC-SP (Thread screw  
mount) type (Socket)

MALC-SP (Flange) type (Plug)

MALC-SP (Flange) type  
(Socket)

MALC-SP (Snap ring) type (Plug)

MALC-SP (Snap ring) type  
(Socket)

## Specifications

|                           |                     |  |                  |                           |
|---------------------------|---------------------|--|------------------|---------------------------|
| Body material             |                     | Socket body: Stainless steel (Autocatalytic nickel-phosphorus coating) |                  |                           |
| Model                     | Thread screw mount  | MALC-1SP   | MALC-2 to 8SP    | MALC-12SP                 |
|                           | Flange              | —  | MALC-2 to 8SP-FL | —                         |
|                           | Snap ring           | —  | MALC-8SP-10F     | MALC-12SP(-F/-16F)        |
| Working pressure *        | MPa                 | 7.0 (2.0)  | 5.0 (2.0)        | 1.5 (2.0)                 |
|                           | kgf/cm <sup>2</sup> | 71 (20)  | 51 (20)          | 15 (20)                   |
|                           | bar                 | 70 (20)  | 50 (20)          | 15 (20)                   |
|                           | PSI                 | 1020 (290)   | 725 (290)        | 218 (290)                 |
| Sealing material          |                     | Fluoro rubber  | FKM (X-100)      | Working temperature range |
| Working temperature range |                     | -20°C to +180°C  |                  |                           |

\* The value in brackets is working pressure of individual plug or socket.

## Max. Tightening Torque

Nm (kgf·cm)

| Model              | 1SP      | 2SP      | 3SP      | 4SP      | 6SP      | 8SP        | 12SP       | 12SP-16F   |
|--------------------|----------|----------|----------|----------|----------|------------|------------|------------|
| Thread screw mount | 20 (204) | 30 (306) | 35 (357) | 45 (460) | 60 (612) | 75 (765)   | 80 (816)   | —          |
| Flange             | —        | 7 (71.5) | 7 (71.5) | 7 (71.5) | 7 (71.5) | 23 (235)   | —          | —          |
| Snap ring          | —        | —        | —        | —        | —        | 260 (2652) | 280 (2856) | 350 (3570) |

## Interchangeability

Socket and plug in the same size can be connected regardless of their end configurations.

## Min. Cross-Sectional Area

(mm<sup>2</sup>)

| Model                     | 1SP | 2SP(-FL) | 3SP(-FL) | 4SP(-FL) | 6SP(-FL) | 8SP(-FL/-10F) | 12SP(-F/-16F) |
|---------------------------|-----|----------|----------|----------|----------|---------------|---------------|
| Min. cross-sectional area | 26  | 49.5     | 87       | 153      | 227      | 347           | 795           |

## Suitability for Vacuum

Not suitable for vacuum application in either connected or disconnected condition.

## Admixture of Air on Connection

Admixture of air may vary depending upon the usage conditions.

(mL)

| Model         | 1SP  | 2SP(-FL) | 3SP(-FL) | 4SP(-FL) | 6SP(-FL) | 8SP(-FL/-10F) | 12SP(-F/-16F) |
|---------------|------|----------|----------|----------|----------|---------------|---------------|
| Volume of air | 0.08 | 0.14     | 0.26     | 0.55     | 0.95     | 0.85          | 1.46          |

## Volume of Spillage per Disconnection

Volume of spillage may vary depending upon the usage conditions.

(mL)

| Model              | 1SP  | 2SP(-FL) | 3SP(-FL) | 4SP(-FL) | 6SP(-FL) | 8SP(-FL/-10F) | 12SP(-F/-16F) |
|--------------------|------|----------|----------|----------|----------|---------------|---------------|
| Volume of spillage | 0.08 | 0.14     | 0.26     | 0.55     | 0.95     | 0.85          | 1.46          |


## Load Required to Maintain Connection When Line Is Pressurized

| Model   | 1SP   | 2SP(-FL)   | 3SP(-FL)  | 4SP(-FL)   | 6SP(-FL)  | 8SP(-FL/-10F)                                     | 12SP(-F/-16F)                                     |
|---|---|--|---|--|---|---|---|
| Maximum acceptable load<br>N (kgf)                              | 2800<br>{286}                                   | 4500<br>{459}                                    | 5600<br>{571}                                   | 10000<br>{1019}                                  | 14000<br>{1427}                                   | 15600<br>{1591}                                   | 8200<br>{837}                                     |
| Minimum load<br>required to maintain<br>connection<br>N (kgf) * | $P \times 170 + 85$<br>( $p \times 1.7 + 8.5$ ) | $P \times 345 + 180$<br>( $p \times 3.45 + 18$ ) | $P \times 460 + 190$<br>( $p \times 4.6 + 19$ ) | $P \times 855 + 260$<br>( $p \times 8.55 + 26$ ) | $P \times 1160 + 260$<br>( $p \times 11.6 + 26$ ) | $P \times 1360 + 310$<br>( $p \times 13.6 + 31$ ) | $P \times 2260 + 400$<br>( $p \times 22.6 + 40$ ) |

\* Assign the actual value of pressure [P (MPa), p (kgf/cm<sup>2</sup>)] to the above formula to calculate the load. Maintain the connection with the minimum load or more, but not more than the maximum acceptable load.

## Flow Rate - Pressure Loss Characteristics


[Test conditions] • Fluid : Water • Temperature : 19°C to 25°C

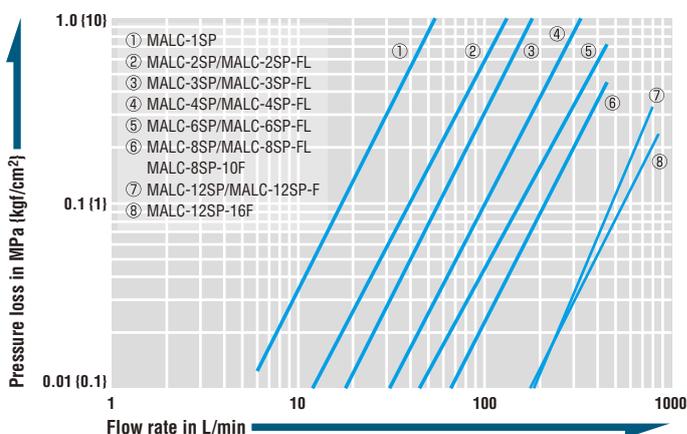

## Acceptable distance between socket and plug


0 to 0.5 mm

Plug and socket must be used in contact with each other.  
Maximum 0.5 mm distance between socket and plug is acceptable.




Models and Dimensions

**Plug MALC-1 to 12P type (Thread screw mount)**

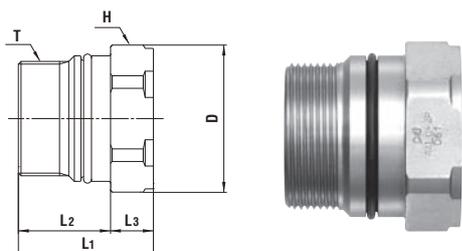


| Model    | Application | Mass (g) | Dimensions (mm) |        |    |    |        |           |
|----------|-------------|----------|-----------------|--------|----|----|--------|-----------|
|          |             |          | L1              | L2     | L3 | ∅D | H(WAF) | T         |
| MALC-1P  | See P113    | 40       | 32              | (18)   | 14 | 21 | Hex.19 | M16 x 1   |
| MALC-2P  | See P113    | 75       | 33              | (20)   | 13 | 28 | Hex.26 | M20 x 1.5 |
| MALC-3P  | See P113    | 95       | 33              | (20)   | 13 | 32 | Hex.29 | M24 x 1.5 |
| MALC-4P  | See P113    | 248      | 41              | (28)   | 13 | 45 | Hex.41 | M35 x 1.5 |
| MALC-6P  | See P113    | 369      | 50.5            | (37.5) | 13 | 50 | Hex.46 | M40 x 2   |
| MALC-8P  | See P113    | 399      | 53              | (41)   | 12 | 54 | Hex.50 | M45 x 2   |
| MALC-12P | See P113    | 724      | 57              | (45)   | 12 | 74 | Hex.67 | M62 x 2   |

**Socket MALC-1 to 12S type (Thread screw mount)**

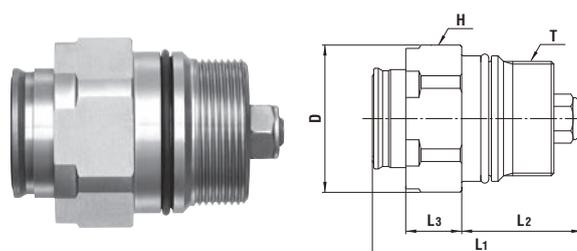


| Model    | Application | Mass (g) | Dimensions (mm) |        |    |    |        |           |
|----------|-------------|----------|-----------------|--------|----|----|--------|-----------|
|          |             |          | L1              | L2     | L3 | ∅D | H(WAF) | T         |
| MALC-1S  | See P113    | 53       | (45)            | (23)   | 16 | 21 | Hex.19 | M16 x 1   |
| MALC-2S  | See P113    | 95       | (49)            | (26)   | 17 | 28 | Hex.26 | M20 x 1.5 |
| MALC-3S  | See P113    | 120      | (51)            | (26)   | 17 | 32 | Hex.29 | M24 x 1.5 |
| MALC-4S  | See P113    | 306      | (64)            | (36.5) | 17 | 45 | Hex.41 | M35 x 1.5 |
| MALC-6S  | See P113    | 471      | (78.5)          | (47.5) | 17 | 50 | Hex.46 | M40 x 2   |
| MALC-8S  | See P113    | 590      | (86)            | (53)   | 18 | 54 | Hex.50 | M45 x 2   |
| MALC-12S | See P113    | 1176     | (98)            | (60)   | 18 | 74 | Hex.67 | M62 x 2   |

**Plug MALC-2 to 6P-FL type (With flange)**

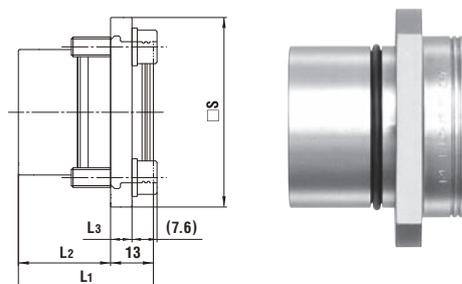


| Model      | Application | Mass (g) | Dimensions (mm) |        |     |     |  |
|------------|-------------|----------|-----------------|--------|-----|-----|--|
|            |             |          | L1              | L2     | L3  | □ S |  |
| MALC-2P-FL | See P113    | 146      | 30              | (17)   | 6   | 40  |  |
| MALC-3P-FL | See P113    | 180      | 33              | (20)   | 6   | 45  |  |
| MALC-4P-FL | See P113    | 390      | 41              | (28)   | 6.5 | 58  |  |
| MALC-6P-FL | See P113    | 553      | 50.5            | (37.5) | 6.5 | 64  |  |

**Socket MALC-2 to 6S-FL type (With flange)**

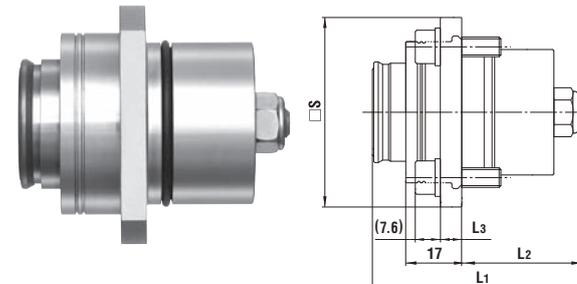


| Model      | Application | Mass (g) | Dimensions (mm) |        |     |     |  |
|------------|-------------|----------|-----------------|--------|-----|-----|--|
|            |             |          | L1              | L2     | L3  | □ S |  |
| MALC-2S-FL | See P113    | 173      | (49)            | (26)   | 6   | 40  |  |
| MALC-3S-FL | See P113    | 208      | (51)            | (26)   | 6   | 45  |  |
| MALC-4S-FL | See P113    | 449      | (64)            | (36.5) | 6.5 | 58  |  |
| MALC-6S-FL | See P113    | 663      | (78.5)          | (47.5) | 6.5 | 64  |  |

**Plug MALC-8P-FL type (With flange)**

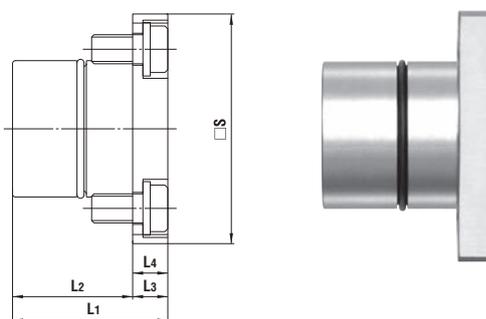

| Model      | Application | Mass (g) | Dimensions (mm) |      |    |    |     |
|------------|-------------|----------|-----------------|------|----|----|-----|
|            |             |          | L1              | L2   | L3 | L4 | □ S |
| MALC-8P-FL | See P113    | 796      | 53              | (41) | 12 | 12 | 79  |


**Socket MALC-8S-FL type (With flange)**

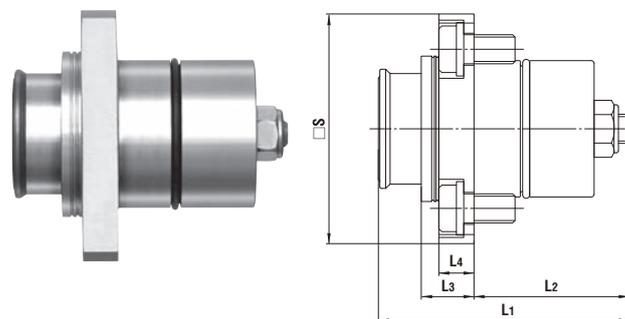

| Model      | Application | Mass (g) | Dimensions (mm) |      |    |    |     |
|------------|-------------|----------|-----------------|------|----|----|-----|
|            |             |          | L1              | L2   | L3 | L4 | □ S |
| MALC-8S-FL | See P113    | 978      | (86)            | (53) | 18 | 12 | 79  |


Models and Dimensions

**Plug MALC-8 / 12P type (With snap ring)**

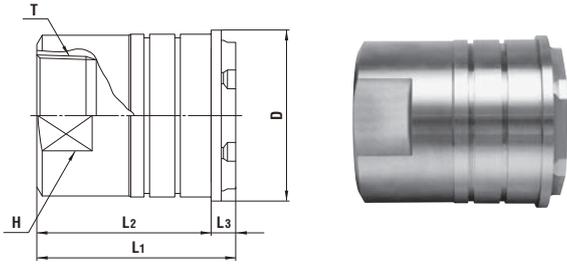

| Model        | Application         | Mass (g) | Dimensions (mm) |    |      |    |        |          |
|--------------|---------------------|----------|-----------------|----|------|----|--------|----------|
|              |                     |          | L1              | L2 | L3   | øD | H(WAF) | T        |
| MALC-8P-10F  | See drawings below. | 1182     | (87)            | 75 | (12) | 64 | 54     | Rc 1 1/4 |
| MALC-12P-F   |                     | 2054     | (97)            | 85 | (12) | 84 | 58     | Rc 1 1/2 |
| MALC-12P-16F |                     | 2128     | (97)            | 85 | (12) | 84 | 71     | Rc 2     |


**Socket MALC-8 / 12S type (With snap ring)**

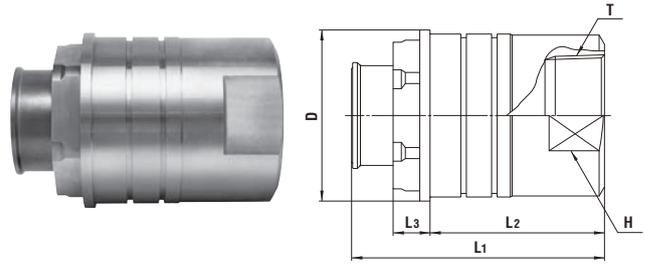

| Model        | Application         | Mass (g) | Dimensions (mm) |    |      |    |        |          |
|--------------|---------------------|----------|-----------------|----|------|----|--------|----------|
|              |                     |          | L1              | L2 | L3   | øD | H(WAF) | T        |
| MALC-8S-10F  | See drawings below. | 1373     | (108)           | 75 | (18) | 64 | 54     | Rc 1 1/4 |
| MALC-12S-F   |                     | 2505     | (123)           | 85 | (18) | 84 | 58     | Rc 1 1/2 |
| MALC-12S-16F |                     | 2579     | (123)           | 85 | (18) | 84 | 71     | Rc 2     |


Dimensions of End Configurations

**MALC-1 to 12SP type (Thread screw mount)**

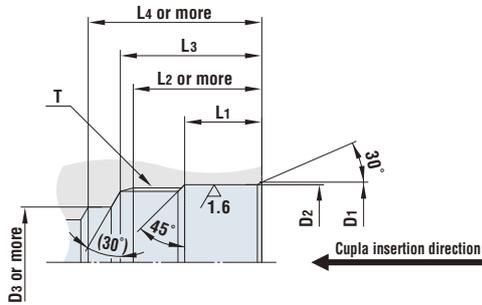


| Model    | Dimensions (mm)                   |                                    |     |      |    |    |      | T         |
|----------|-----------------------------------|------------------------------------|-----|------|----|----|------|-----------|
|          | øD1                               | øD2                                | øD3 | L1   | L2 | L3 | L4   |           |
| MALC-1S  | 18.3 <sup>+0.1</sup> <sub>0</sub> | 17.3 <sup>+0.06</sup> <sub>0</sub> | 13  | 11   | 20 | 22 | 25   | M16 x 1   |
| MALC-1P  |                                   |                                    |     |      |    |    |      |           |
| MALC-2S  | 24 <sup>+0.1</sup> <sub>0</sub>   | 23 <sup>+0.06</sup> <sub>0</sub>   | 16  | 11.5 | 22 | 25 | 28   | M20 x 1.5 |
| MALC-2P  |                                   |                                    |     |      |    |    |      |           |
| MALC-3S  | 27.6 <sup>+0.1</sup> <sub>0</sub> | 26.6 <sup>+0.08</sup> <sub>0</sub> | 18  | 11   | 22 | 25 | 29   | M24 x 1.5 |
| MALC-3P  |                                   |                                    |     |      |    |    |      |           |
| MALC-4S  | 39.5 <sup>+0.1</sup> <sub>0</sub> | 38.5 <sup>+0.08</sup> <sub>0</sub> | 26  | 15.5 | 30 | 33 | 40.5 | M35 x 1.5 |
| MALC-4P  |                                   |                                    |     |      |    |    |      |           |
| MALC-6S  | 45 <sup>+0.1</sup> <sub>0</sub>   | 44 <sup>+0.08</sup> <sub>0</sub>   | 30  | 20   | 40 | 44 | 51.5 | M40 x 2   |
| MALC-6P  |                                   |                                    |     |      |    |    |      |           |
| MALC-8S  | 48 <sup>+0.3</sup> <sub>0</sub>   | 47 <sup>+0.08</sup> <sub>0</sub>   | 35  | 27   | 43 | 47 | 55   | M45 x 2   |
| MALC-8P  |                                   |                                    |     |      |    |    |      |           |
| MALC-12S | 66 <sup>+0.3</sup> <sub>0</sub>   | 64 <sup>+0.1</sup> <sub>0</sub>    | 45  | 30   | 50 | 54 | 65   | M62 x 2   |
| MALC-12P |                                   |                                    |     |      |    |    |      |           |

**MALC-2 to 8SP-FL type (With flange)**

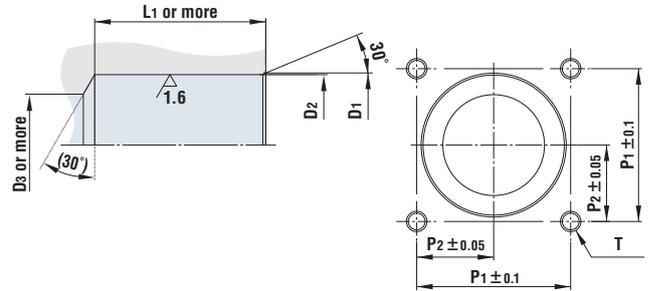


| Model      | Dimensions (mm)                   |                                    |     |      |    |      |  |
|------------|-----------------------------------|------------------------------------|-----|------|----|------|--|
|            | øD1                               | øD2                                | øD3 | L1   | P1 | P2   | T  |
| MALC-2S-FL | 24 <sup>+0.1</sup> <sub>0</sub>   | 23 <sup>+0.06</sup> <sub>0</sub>   | 16  | 28   | 28 | 14   | 4 x M6<br>Thread depth<br>17 mm or more  |
| MALC-2P-FL |                                   |                                    |     | 19   |    |      |  |
| MALC-3S-FL | 27.6 <sup>+0.1</sup> <sub>0</sub> | 26.6 <sup>+0.08</sup> <sub>0</sub> | 18  | 28   | 31 | 15.5 |  |
| MALC-3P-FL |                                   |                                    |     | 22   |    |      |  |
| MALC-4S-FL | 39.5 <sup>+0.1</sup> <sub>0</sub> | 38.5 <sup>+0.08</sup> <sub>0</sub> | 26  | 39   | 40 | 20   | 4 x M10<br>Thread depth<br>15 mm or more |
| MALC-4P-FL |                                   |                                    |     | 30.5 |    |      |  |
| MALC-6S-FL | 45 <sup>+0.1</sup> <sub>0</sub>   | 44 <sup>+0.08</sup> <sub>0</sub>   | 30  | 50   | 45 | 22.5 |  |
| MALC-6P-FL |                                   |                                    |     | 40   |    |      |  |
| MALC-8S-FL | 48 <sup>+0.3</sup> <sub>0</sub>   | 47 <sup>+0.08</sup> <sub>0</sub>   | 35  | 53   | 55 | 27.5 |  |
| MALC-8P-FL |                                   |                                    |     | 43   |    |      |  |

**MALC-8 / 12P type (With snap ring)**

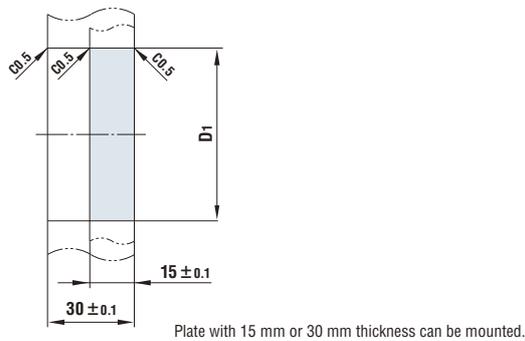

| Model        | Dimensions (mm)                   |  |
|--------------|-----------------------------------|--|
|              | øD1                               |  |
| MALC-8S-10F  | 60.1 <sup>+0.1</sup> <sub>0</sub> |  |
| MALC-8P-10F  |                                   |  |
| MALC-12S-F   | 80.1 <sup>+0.1</sup> <sub>0</sub> |  |
| MALC-12P-F   |                                   |  |
| MALC-12S-16F | 80.1 <sup>+0.1</sup> <sub>0</sub> |  |
| MALC-12P-16F |                                   |  |

# MULTI CUPLA SERIES

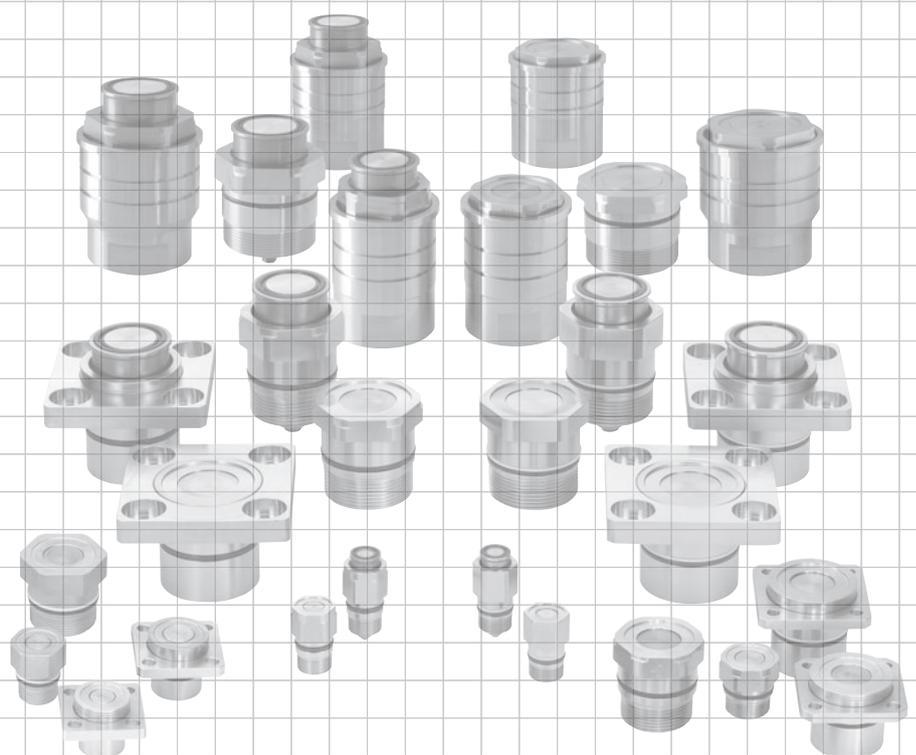

For Multi-Port Connection (Automatic)

# Multi Cupla

## MALC-HSP Type for High Pressure Use

Low spill type for high pressure use

Working pressure



21.0 to 25.0 MPa  
(214 to 255 kgf/cm<sup>2</sup>)

Valve structure



Two-way shut-off

Applicable fluids



Hydraulic oil

A single operation enables simultaneous connections of multiple lines. A special design minimises air admixture in fluid lines upon connection. Suitable for high pressure hydraulic circuits.

- Compared with conventional Multi Cuplas, approximately double flow rates are realized. This could reduce the size of required plates. (Rate of flow increase depends on Cupla sizes.)
- The MALC type realizes a 2 mm axial eccentricity allowance, while the conventional Multi Cupla is only 0.6 mm.
- Special valve design enables connection of socket and plug under dynamic pressure of up to 8 MPa.
- When connected, the distance between the socket plate and plug plate is designed to be 30 mm for all sizes. This means any size of Cupla can be mounted and used on the same plate.
- Low spill valves minimize outflow of fluid and admixture of air into the fluid line.



| Specifications            |   |   |   |
|---------------------------|---|---|---|
| Body material             | Special steel (Autocatalytic nickel-phosphorus coating) |   |   |
| Model                     | Thread screw mount                                      | MALC-1HSP                               | MALC-2 to 8HSP                          |
|                           | Flange  | —                                       | MALC-2 to 8HSP-FL                       |
| Working pressure          | MPa   | 25.0 (Either socket or plug only: 8.0)  | 21.0 (Either socket or plug only: 8.0)  |
|                           | kgf/cm <sup>2</sup>                                     | 255 (Either socket or plug only: 81)    | 214 (Either socket or plug only: 81)    |
|                           | bar   | 250 (Either socket or plug only: 80)    | 210 (Either socket or plug only: 80)    |
|                           | PSI   | 3630 (Either socket or plug only: 1160) | 3050 (Either socket or plug only: 1160) |
| Sealing material          | Sealing material  | Mark                                    | Working temperature range               |
| Working temperature range | Fluoro rubber   | FKM (X-100)                             | -20°C to +180°C                         |

| Max. Tightening Torque |  | Nm (kgf·cm) |          |          |          |          |          |
|------------------------|--|-------------|----------|----------|----------|----------|----------|
| Model                  |  | 1HSP        | 2HSP     | 3HSP     | 4HSP     | 6HSP     | 8HSP     |
| Thread screw mount     |  | 30 {306}    | 50 {510} | 53 {540} | 65 {663} | 80 {816} | 95 {969} |
| Flange                 |  | —           | 9 {91}   |          |          | 30 {306} |          |

**Interchangeability**  
Socket and plug in the same size can be connected regardless of their end configurations.

| Min. Cross-Sectional Area |  | (mm <sup>2</sup> ) |      |      |      |      |      |
|---------------------------|--|--------------------|------|------|------|------|------|
| Model                     |  | 1HSP               | 2HSP | 3HSP | 4HSP | 6HSP | 8HSP |
| Min. cross-sectional area |  | 26                 | 49.5 | 87   | 153  | 227  | 347  |

**Suitability for Vacuum**  
Not suitable for vacuum application in either connected or disconnected condition.

| Admixture of Air on Connection |  | Admixture of air may vary depending upon the usage conditions. (mL) |      |      |      |      |      |
|--------------------------------|--|---|------|------|------|------|------|
| Model                          |  | 1HSP  | 2HSP | 3HSP | 4HSP | 6HSP | 8HSP |
| Volume of air                  |  | 0.08  | 0.14 | 0.26 | 0.55 | 0.95 | 0.85 |


| Volume of Spillage per Disconnection |  | Volume of spillage may vary depending upon the usage conditions. (mL) |      |      |      |      |      |
|--------------------------------------|--|---|------|------|------|------|------|
| Model                                |  | 1HSP  | 2HSP | 3HSP | 4HSP | 6HSP | 8HSP |
| Volume of spillage                   |  | 0.08  | 0.14 | 0.26 | 0.55 | 0.95 | 0.85 |

| Load Required to Maintain Connection When Line Is Pressurized |  |                         |                          |                         |                          |                           |                           |
|---|--|-------------------------|--------------------------|-------------------------|--------------------------|---------------------------|---------------------------|
| Model   |  | 1HSP                    | 2HSP                     | 3HSP                    | 4HSP                     | 6HSP                      | 8HSP                      |
| Maximum acceptable load<br>N (kgf)                            |  | 9300<br>{948}           | 16500<br>{1683}          | 22000<br>{2244}         | 40500<br>{4130}          | 55000<br>{5609}           | 64500<br>{6577}           |
| Minimum load required to maintain connection<br>N (kgf) *     |  | Px170+85<br>{p×1.7+8.5} | Px345+180<br>{p×3.45+18} | Px460+190<br>{p×4.6+19} | Px855+260<br>{p×8.55+26} | Px1160+260<br>{p×11.6+26} | Px1360+310<br>{p×13.6+31} |

\* Assign the actual value of pressure [P (MPa), p (kgf/cm<sup>2</sup>)] to the above formula to calculate the load. Maintain the connection with the minimum load or more, but not more than the maximum acceptable load.


### Flow Rate - Pressure Loss Characteristics

[Test conditions] • Fluid : Hydraulic oil • Temperature : 30°C ± 5°C  
• Fluid viscosity : 32 × 10<sup>-6</sup> m<sup>2</sup>/s • Density : 0.87 × 10<sup>3</sup> kg/m<sup>3</sup>

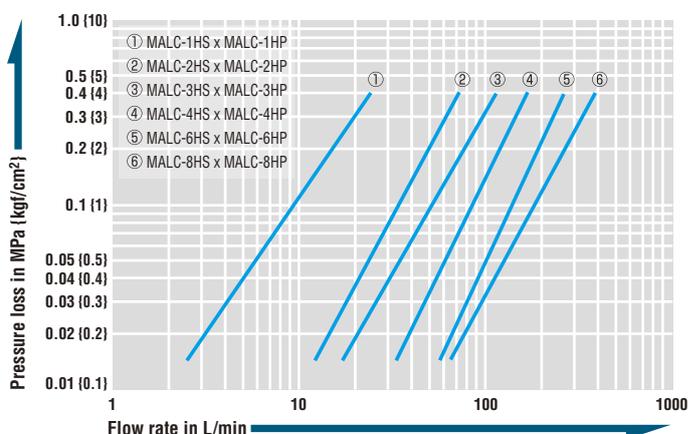


### Acceptable distance between Socket and Plug

Plug and socket must be used in contact with each other. Maximum 0.5 mm distance between socket and plug is acceptable.




Models and Dimensions

**Plug MALC-1 to 8HP type (Thread screw mount)**

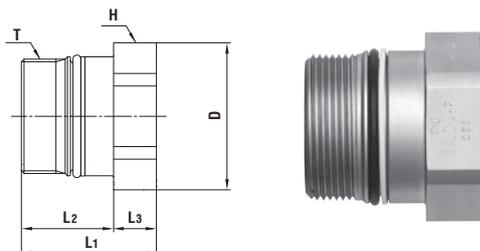


| Model    | Application | Mass (g) | Dimensions (mm) |        |    |    |        |           |
|----------|-------------|----------|-----------------|--------|----|----|--------|-----------|
|          |             |          | L1              | L2     | L3 | ϕD | H(WAF) | T         |
| MALC-1HP | See P117    | 39       | 32              | (18)   | 14 | 21 | Hex.19 | M16 x 1   |
| MALC-2HP | See P117    | 73       | 33              | (20)   | 13 | 28 | Hex.26 | M20 x 1.5 |
| MALC-3HP | See P117    | 96       | 33              | (20)   | 13 | 32 | Hex.29 | M24 x 1.5 |
| MALC-4HP | See P117    | 250      | 41              | (28)   | 13 | 45 | Hex.41 | M35 x 1.5 |
| MALC-6HP | See P117    | 357      | 50.5            | (37.5) | 13 | 50 | Hex.46 | M40 x 2   |
| MALC-8HP | See P117    | 391      | 53              | (41)   | 12 | 54 | Hex.50 | M45 x 2   |

**Socket MALC-1 to 8HS type (Thread screw mount)**

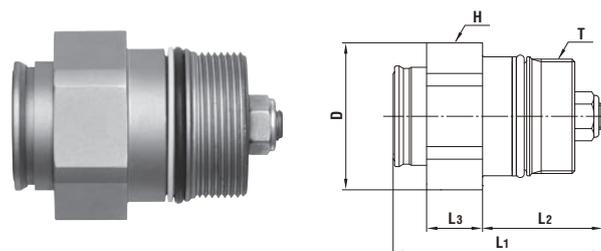


| Model    | Application | Mass (g) | Dimensions (mm) |        |    |    |        |           |
|----------|-------------|----------|-----------------|--------|----|----|--------|-----------|
|          |             |          | L1              | L2     | L3 | ϕD | H(WAF) | T         |
| MALC-1HS | See P117    | 51       | (45)            | (23)   | 16 | 21 | Hex.19 | M16 x 1   |
| MALC-2HS | See P117    | 89       | (49)            | (26)   | 17 | 28 | Hex.26 | M20 x 1.5 |
| MALC-3HS | See P117    | 117      | (51)            | (26)   | 17 | 32 | Hex.29 | M24 x 1.5 |
| MALC-4HS | See P117    | 290      | (64)            | (36.5) | 17 | 45 | Hex.41 | M35 x 1.5 |
| MALC-6HS | See P117    | 447      | (78.5)          | (47.5) | 17 | 50 | Hex.46 | M40 x 2   |
| MALC-8HS | See P117    | 579      | (86)            | (53)   | 18 | 54 | Hex.50 | M45 x 2   |

**Plug MALC-2 to 6HP-FL type (With flange)**

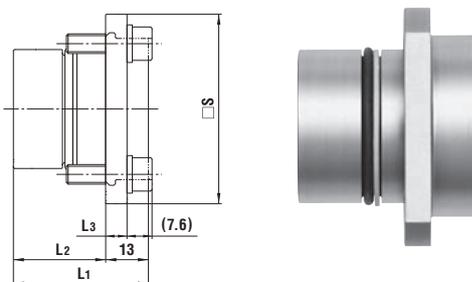


| Model       | Application | Mass (g) | Dimensions (mm) |        |     |     |
|-------------|-------------|----------|-----------------|--------|-----|-----|
|             |             |          | L1              | L2     | L3  | □ S |
| MALC-2HP-FL | See P117    | 142      | 30              | (17)   | 6   | 40  |
| MALC-3HP-FL | See P117    | 179      | 33              | (20)   | 6   | 45  |
| MALC-4HP-FL | See P117    | 367      | 41              | (28)   | 6.5 | 58  |
| MALC-6HP-FL | See P117    | 514      | 50.5            | (37.5) | 6.5 | 64  |

**Socket MALC-2 to 6HS-FL type (With flange)**

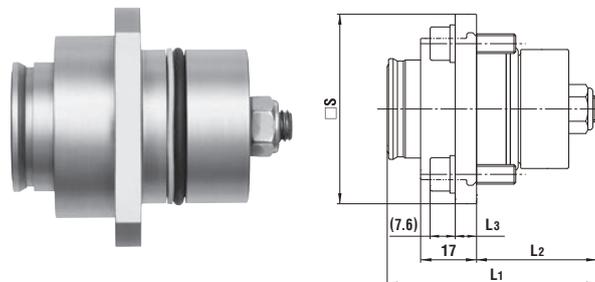


| Model       | Application | Mass (g) | Dimensions (mm) |        |     |     |
|-------------|-------------|----------|-----------------|--------|-----|-----|
|             |             |          | L1              | L2     | L3  | □ S |
| MALC-2HS-FL | See P117    | 163      | (49)            | (26)   | 6   | 40  |
| MALC-3HS-FL | See P117    | 200      | (51)            | (26)   | 6   | 45  |
| MALC-4HS-FL | See P117    | 418      | (64)            | (36.5) | 6.5 | 58  |
| MALC-6HS-FL | See P117    | 611      | (78.5)          | (47.5) | 6.5 | 64  |

**Plug MALC-8HP-FL type (With flange)**

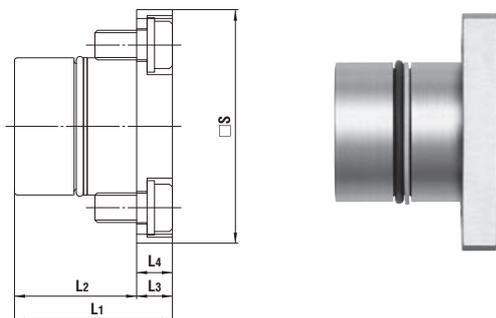

| Model       | Application | Mass (g) | Dimensions (mm) |      |    |    |     |
|-------------|-------------|----------|-----------------|------|----|----|-----|
|             |             |          | L1              | L2   | L3 | L4 | □ S |
| MALC-8HP-FL | See P117    | 786      | 53              | (41) | 12 | 12 | 79  |


**Socket MALC-8HS-FL type (With flange)**

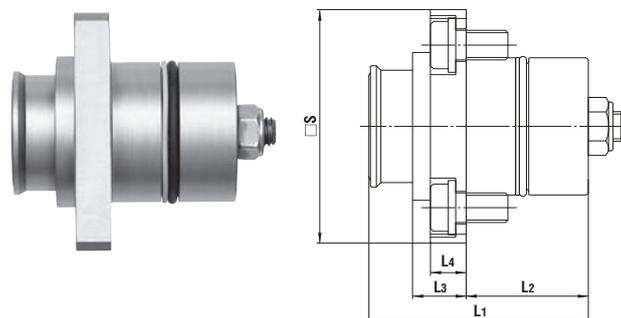

| Model       | Application | Mass (g) | Dimensions (mm) |      |    |    |     |
|-------------|-------------|----------|-----------------|------|----|----|-----|
|             |             |          | L1              | L2   | L3 | L4 | □ S |
| MALC-8HS-FL | See P117    | 964      | (86)            | (53) | 18 | 12 | 79  |


Dimensions of End Configurations

MALC-1 to 8HSP type (Thread screw mount)

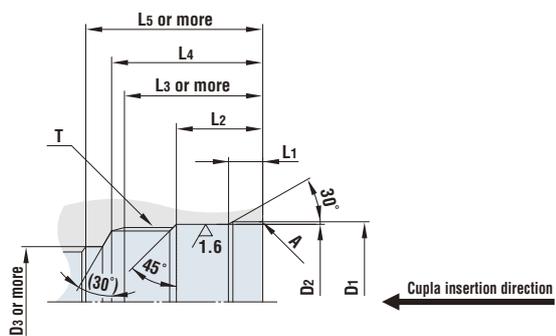


| Model                | Dimensions (mm)                   |                                    |                   |                                  |    |    |    |      |           |      |
|----------------------|-----------------------------------|------------------------------------|-------------------|----------------------------------|----|----|----|------|-----------|------|
|                      | $\varnothing D_1$                 | $\varnothing D_2$                  | $\varnothing D_3$ | L1                               | L2 | L3 | L4 | L5   | T         | A    |
| MALC-1HS<br>MALC-1HP | 17.8 <sup>+0.1</sup> <sub>0</sub> | 16.8 <sup>+0.06</sup> <sub>0</sub> | 13                | 3.5 <sup>+0.2</sup> <sub>0</sub> | 11 | 20 | 22 | 25   | M16 x 1   | C0.2 |
| MALC-2HS<br>MALC-2HP | 23 <sup>+0.1</sup> <sub>0</sub>   | 22 <sup>+0.06</sup> <sub>0</sub>   | 16                | 2.8 <sup>+0.2</sup> <sub>0</sub> | 11 | 22 | 25 | 28   | M20 x 1.5 | R0.5 |
| MALC-3HS<br>MALC-3HP | 27.1 <sup>+0.1</sup> <sub>0</sub> | 26 <sup>+0.08</sup> <sub>0</sub>   | 18                | 2.8 <sup>+0.2</sup> <sub>0</sub> | 11 | 22 | 25 | 29   | M24 x 1.5 | R0.5 |
| MALC-4HS<br>MALC-4HP | 37.7 <sup>+0.3</sup> <sub>0</sub> | 36.5 <sup>+0.08</sup> <sub>0</sub> | 26                | 6 <sup>+0.2</sup>                | 18 | 30 | 33 | 40.5 | M35 x 1.5 | R0.5 |
| MALC-6HS<br>MALC-6HP | 42.5 <sup>+0.3</sup> <sub>0</sub> | 41.5 <sup>+0.08</sup> <sub>0</sub> | 30                | 6 <sup>+0.2</sup>                | 23 | 40 | 44 | 51.5 | M40 x 2   | R0.5 |
| MALC-8HS<br>MALC-8HP | 47.5 <sup>+0.3</sup> <sub>0</sub> | 46.5 <sup>+0.08</sup> <sub>0</sub> | 35                | 10.5 <sup>+0.2</sup>             | 27 | 43 | 47 | 55   | M45 x 2   | R0.5 |

MALC-2 to 8HSP-FL type (With flange)

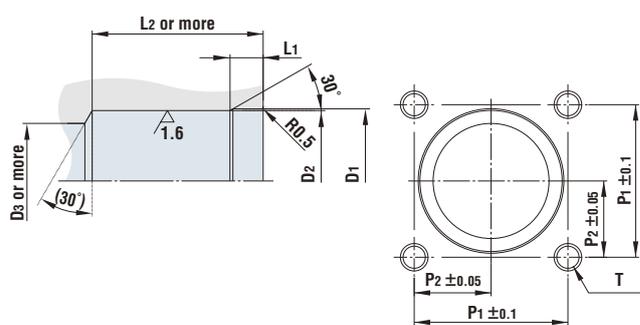

| Model                      | Dimensions (mm)                   |                                    |                   |                                  |            |    |      |  |
|----------------------------|-----------------------------------|------------------------------------|-------------------|----------------------------------|------------|----|------|--|
|                            | $\varnothing D_1$                 | $\varnothing D_2$                  | $\varnothing D_3$ | L1                               | L2         | P1 | P2   | T  |
| MALC-2HS-FL<br>MALC-2HP-FL | 23 <sup>+0.1</sup> <sub>0</sub>   | 22 <sup>+0.06</sup> <sub>0</sub>   | 16                | 2.8 <sup>+0.2</sup> <sub>0</sub> | 28<br>19   | 28 | 14   | 4 x M6<br>Thread depth<br>17 mm or more  |
| MALC-3HS-FL<br>MALC-3HP-FL | 27.1 <sup>+0.1</sup> <sub>0</sub> | 26 <sup>+0.08</sup> <sub>0</sub>   | 18                | 2.8 <sup>+0.2</sup> <sub>0</sub> | 28<br>22   | 31 | 15.5 |  |
| MALC-4HS-FL<br>MALC-4HP-FL | 37.7 <sup>+0.3</sup> <sub>0</sub> | 36.5 <sup>+0.08</sup> <sub>0</sub> | 26                | 6 <sup>+0.2</sup>                | 39<br>30.5 | 40 | 20   |  |
| MALC-6HS-FL<br>MALC-6HP-FL | 42.5 <sup>+0.3</sup> <sub>0</sub> | 41.5 <sup>+0.08</sup> <sub>0</sub> | 30                | 6 <sup>+0.2</sup>                | 50<br>40   | 45 | 22.5 |  |
| MALC-8HS-FL<br>MALC-8HP-FL | 47.5 <sup>+0.3</sup> <sub>0</sub> | 46.5 <sup>+0.08</sup> <sub>0</sub> | 35                | 10.5 <sup>+0.2</sup>             | 53<br>43   | 55 | 27.5 | 4 x M10<br>Thread depth<br>15 mm or more |

# MULTI CUPLA SERIES

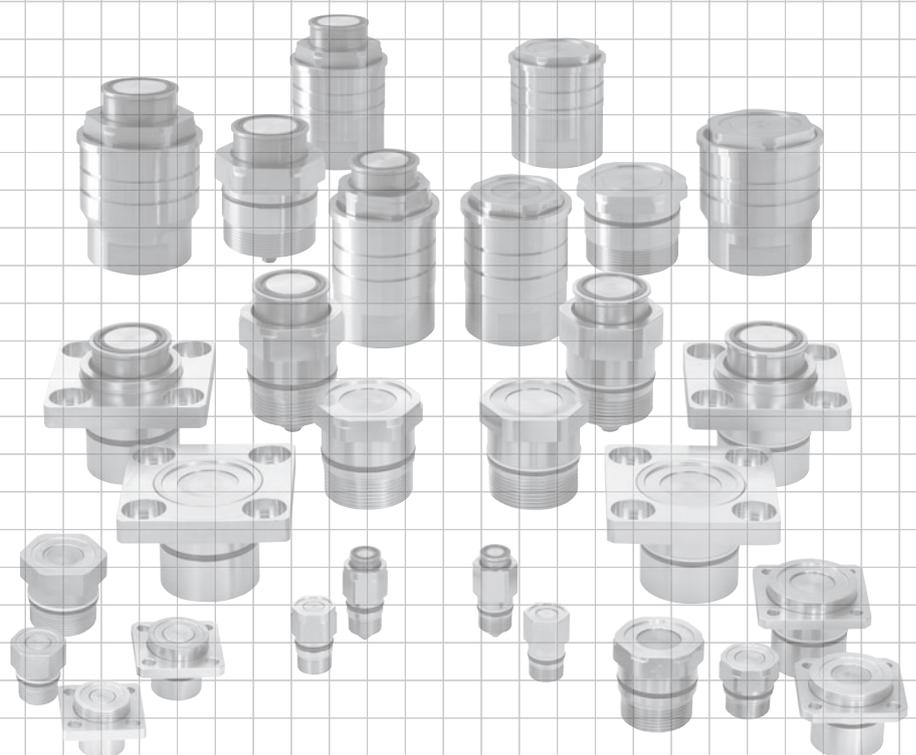

# For High Purity Chemicals

# Semicon Cupla

## SP Type

For semiconductor manufacturing production installation

|   |   |   |   |   |   |
|---|---|---|---|---|---|
| <b>Working pressure</b>   | <b>Valve structure</b>  | <b>Applicable fluids</b>  |   |   |   |
| <br>0.2 MPa<br>(2 kgf/cm <sup>2</sup> ) | <br>Two-way shut-off |  |  |  |  |
|   |   | High purity chemicals   | Water   | Gas   | Air   |

**General purpose type with stainless steel body and rubber seal.**  
**Electro-polished body for enhanced corrosion resistance.**

- Body and valve springs are stainless steel (SUS304). Body is electro-polished for enhanced corrosion resistance.
- Seal materials can be selected to suit your fluid and application, to flexibly comply with your semiconductor production process requirements.
- All components are cleaned, assembled, inspected, and then packed in a clean room.
- No grease is applied to the seal material.
- Each plug comes with a dust cap.
- Stainless steel SUS316 body and valve springs are available as made-to-order products.




| Specifications                             |                           |   |                           |                   |
|--|---------------------------|---|---------------------------|-------------------|
| Body material                              |                           | Electropolished stainless steel (SUS304)                              |                           |                   |
| Size (Thread)                              |                           | 1/8", 1/4", 3/8", 1/2", 3/4", 1"<br>1/8-27NPT, 1/4-18NPT, 19/32-18UNS |                           |                   |
| Working pressure                           | MPa                       | 0.2   |                           |                   |
|  | kgf/cm <sup>2</sup>       | 2   |                           |                   |
|  | bar                       | 2   |                           |                   |
|  | PSI                       | 29  |                           |                   |
| Seal material<br>Working temperature range | Seal material             | Mark  | Working temperature range | Remarks           |
|  | Fluoro rubber             | FKM (X-100)   | 0°C to +50°C              | Standard material |
|  | Ethylene-propylene rubber | EPDM (EPTS)   | 0°C to +50°C              | Standard material |
|  | Perfluoroelastomer        | P   | 0°C to +50°C              | Standard material |
|  | Kalrez                    | KL  | 0°C to +50°C              | Standard material |

| Min. Cross-Sectional Area (mm <sup>2</sup> ) |     |     |     |     |     |     |
|--|-----|-----|-----|-----|-----|-----|
| Model  | 1SP | 2SP | 3SP | 4SP | 6SP | 8SP |
| Min. cross-sectional area                    | 13  | 17  | 48  | 64  | 83  | 192 |

### Flow Rate – Pressure Loss Characteristics

[Test conditions] • Fluid : Water • Temperature : 20°C ± 5°C

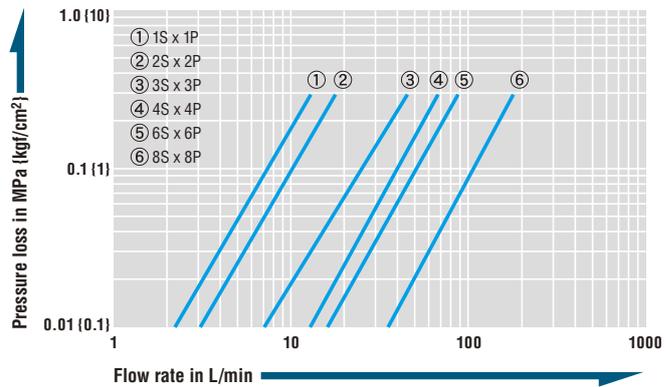

### Interchangeability

Socket and plug in the same size can be connected regardless of their end configurations.

### Models and Dimensions

WAF : WAF stands for width across flats.

| Plug       |                    | Female thread |                 |    |         |                  |
|------------|--------------------|---------------|-----------------|----|---------|------------------|
| Model      | Container capacity | Mass (g)      | Dimensions (mm) |    |         |                  |
|            |                    |               | L               | C  | H(WAF)  | T(Female thread) |
| 1P-304     | For 10L to 20L     | 19            | 29              | 19 | *Hex.14 | Rc 1/8           |
| 1P-304-NPT | For 10L to 20L     |               |                 |    |         | 1/8-27NPT        |
| 1P-304-UNS | For 10L to 20L     | 34            | 33              | 19 | Hex.21  | 19/32-18UNS      |
| 2P-304     | For 10L to 20L     |               |                 |    |         | Rc 1/4           |
| 2P-304-NPT | For 10L to 20L     | 35            | 36              | 22 | *Hex.17 | 1/4-18NPT        |
| 2P-304-UNS | For 10L to 20L     | 41            | 36              | 22 | Hex.21  | 19/32-18UNS      |
| 3P-304     | For 100L to 200L   | 60            | 40              | 25 | *Hex.21 | Rc 3/8           |
| 4P-304     | For 100L to 200L   | 115           | 44              | 28 | *Hex.29 | Rc 1/2           |
| 6P-304     | For 100L to 200L   | 216           | 52              | 36 | *Hex.35 | Rc 3/4           |
| 8P-304     | For 100L to 200L   | 352           | 62              | 40 | *Hex.41 | Rc 1             |

| Socket     |                    | Female thread |                 |    |        |                  |
|------------|--------------------|---------------|-----------------|----|--------|------------------|
| Model      | Container capacity | Mass (g)      | Dimensions (mm) |    |        |                  |
|            |                    |               | L               | φD | H(WAF) | T(Female thread) |
| 1S-304     | For 10L to 20L     | 82            | 48              | 24 | 14     | Rc 1/8           |
| 1S-304-NPT | For 10L to 20L     | 84            |                 |    |        | 1/8-27NPT        |
| 2S-304     | For 10L to 20L     | 138           | 58              | 28 | 19     | Rc 1/4           |
| 2S-304-NPT | For 10L to 20L     |               |                 |    |        | 1/4-18NPT        |
| 3S-304     | For 100L to 200L   | 204           | 65              | 35 | 21     | Rc 3/8           |
| 4S-304     | For 100L to 200L   | 424           | 72              | 45 | 29     | Rc 1/2           |
| 6S-304     | For 100L to 200L   | 708           | 88              | 55 | 35     | Rc 3/4           |
| 8S-304     | For 100L to 200L   | 1081          | 102             | 65 | 41     | Rc 1             |

\* Above are the dimensions of SUS304.  
 \* The appearance of SUS304 and 316 bodies is different.

Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.

# For High Purity Chemicals

# Semicon Cupla


## SCS Type

For semiconductor manufacturing equipment

|  |  |  |
|--|--|--|
| <b>Working pressure</b><br>0.2 MPa<br>(2 kgf/cm <sup>2</sup> ) | <b>Valve structure</b><br>Two-way shut-off | <b>Applicable fluids</b><br>High purity chemicals<br>Water<br>Gas<br>Air |
|--|--|--|

## Adopted stainless steel body and fluorine contained resin valves.

- The body and spring material of stainless steel (SUS304), and valve of fluorine contained resin ensure excellent performance with various chemicals.
- Body (SUS304) is electropolished for enhanced corrosion resistance.
- All components are cleaned, assembled, inspected, and then packed in a clean room.
- Grease is not applied to the seal material.
- Plug comes with a dust cap.

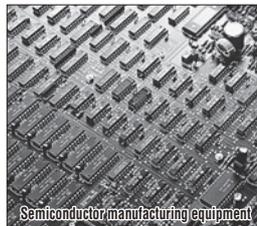


| Specifications            |                     |   |      |                           |                   |
|---------------------------|---------------------|---|------|---------------------------|-------------------|
| Body material             |                     | Electropolished stainless steel (SUS304)                              |      |                           |                   |
| Size (Thread)             |                     | 1/8", 1/4", 3/8", 1/2", 3/4", 1"<br>1/8-27NPT, 1/4-18NPT, 19/32-18UNS |      |                           |                   |
| Working pressure          | MPa                 | 0.2   |      |                           |                   |
|                           | kgf/cm <sup>2</sup> | 2   |      |                           |                   |
|                           | bar                 | 2   |      |                           |                   |
|                           | PSI                 | 29  |      |                           |                   |
| Seal material             | Socket              | Seal material   | Mark | Working temperature range | Remarks           |
| Working temperature range | O-ring              | Perfluoroelastomer  | P    | 0°C to +50°C              | Standard material |
|                           | Valve               | Fluoropolymer resin (Socket: PFA, Plug: PTFE except 1P and 2P of PFA) |      |                           |                   |

\*If you need a seal material other than perfluoroelastomer, please consult with us.

| Min. Cross-Sectional Area (mm <sup>2</sup> ) |         |         |        |        |        |        |
|--|---------|---------|--------|--------|--------|--------|
| Model  | SCS-1SP | SCS-2SP | SCS-3P | SCS-4P | SCS-6P | SCS-8P |
| Min. cross-sectional area                    | 15      | 23      | 28     | 71     | 110    | 162    |

### Flow Rate – Pressure Loss Characteristics

[Test conditions] • Fluid : Water • Temperature : 21°C to 32°C

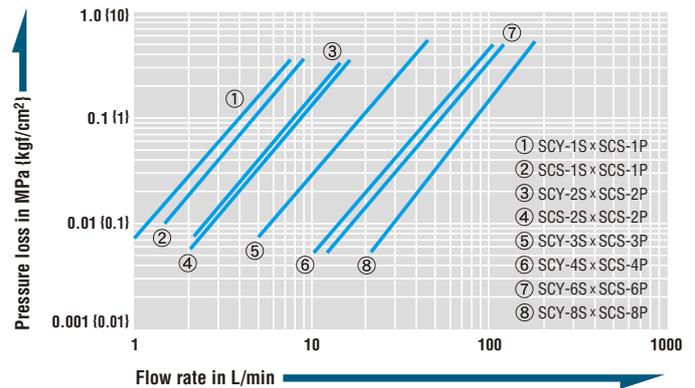

### Interchangeability Check List (SCS Type, SCY Type)

● indicates connection capability except for made-to-order products.

| Plug     | Model | Socket   |     |          |     |     |     |     |     |
|----------|-------|----------|-----|----------|-----|-----|-----|-----|-----|
|          |       | SCS Type |     | SCY Type |     |     |     |     |     |
|          |       | -1S      | -2S | -1S      | -2S | -3S | -4S | -6S | -8S |
| SCS Type | -1P   | ●        |     | ●        |     |     |     |     |     |
|          | -2P   |          | ●   |          | ●   |     |     |     |     |
|          | -3P   |          |     |          |     | ●   |     |     |     |
|          | -4P   |          |     |          |     |     | ●   |     |     |
|          | -6P   |          |     |          |     |     |     | ●   |     |
|          | -8P   |          |     |          |     |     |     |     | ●   |

### Models and Dimensions

WAF : WAF stands for width across flats.

| Plug       |                    | Female thread |                                      |
|------------|--------------------|---------------|--------------------------------------|
|            |                    |               |                                      |
| Model      | Container capacity | Mass (g)      | Dimensions (mm)                      |
|            |                    |               | L    C    H(WAF)    T(Female thread) |
| SCS-1P     | For 10L to 20L     | 17            | 29    19    Hex.14    Rc 1/8         |
| SCS-1P-NPT | For 10L to 20L     |               | 1/8-27NPT                            |
| SCS-1P-UNS | For 10L to 20L     | 34            | 33    19    Hex.21    19/32-18UNS    |
| SCS-2P     | For 10L to 20L     | 32            | 34    22    Hex.17    Rc 1/4         |
| SCS-2P-NPT | For 10L to 20L     |               | 1/4-18NPT                            |
| SCS-2P-UNS | For 10L to 20L     | 41            | 36    22    Hex.21    19/32-18UNS    |
| SCS-3P     | For 100L to 200L   | 61            | 40    25    Hex.21    Rc 3/8         |
| SCS-4P     | For 100L to 200L   | 114           | 44    28    Hex.29    Rc 1/2         |
| SCS-6P     | For 100L to 200L   | 198           | 52    36    Hex.35    Rc 3/4         |
| SCS-8P     | For 100L to 200L   | 338           | 62    40    Hex.41    Rc 1           |

| Socket     |                    | Female thread |                                       |
|------------|--------------------|---------------|---------------------------------------|
|            |                    |               |                                       |
| Model      | Container capacity | Mass (g)      | Dimensions (mm)                       |
|            |                    |               | L    øD    H(WAF)    T(Female thread) |
| SCS-1S-NPT | For 10L to 20L     | 84            | 48    24    14    1/8-27NPT           |
| SCS-2S-NPT | For 10L to 20L     | 138           | 58    28    19    1/4-18NPT           |

Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.

# For High Purity Chemicals

# Semicon Cupla

## SCY Type

For semiconductor manufacturing equipment

Working pressure

**0.2**  
0.2 MPa  
(2 kgf/cm<sup>2</sup>)

Valve structure



Two-way shut-off

Applicable fluids



High purity chemicals

Water

Gas

Air

**Fluorine contained resin packing seal and perfluoroelastomer packing seal are used to reduce required connection load and to achieve tight sealing.**

- The material of body and spring are of stainless steel (SUS304), while that of valve is of fluorine contained resin. The combination shows excellent performance with various types of chemicals.
- Body (SUS304) is electropolished for enhanced corrosion resistance.
- All components are cleaned, assembled, inspected, and then packed in a clean room.
- Grease is not applied to the seal materials.
- Flanged body makes it easy to operate even with gloves.



### Specifications

|                           |                     |  |                |                           |         |
|---------------------------|---------------------|--|----------------|---------------------------|---------|
| Body material             |                     | Electropolished stainless steel (SUS304)                 |                |                           |         |
| Size (Thread)             |                     | 1/8", 1/4", 3/8", 1/2", 3/4", 1"<br>1/8-27NPT, 1/4-18NPT |                |                           |         |
| Working pressure          | MPa                 | 0.2  |                |                           |         |
|                           | kgf/cm <sup>2</sup> | 2  |                |                           |         |
|                           | bar                 | 2  |                |                           |         |
|                           | PSI                 | 29   |                |                           |         |
| Seal material             | Socket packing seal | Seal material  | Mark           | Working temperature range | Remarks |
|                           |                     | Perfluoroelastomer<br>Fluoropolymer resin                | P<br>PTFE (TF) |                           |         |
| Working temperature range | Valve               | Fluoropolymer resin (PTFE except 1P and 2P of PFA)       |                |                           |         |


\*If you need a seal material other than perfluoroelastomer, please consult with us.

### Min. Cross-Sectional Area (mm<sup>2</sup>)

| Model                     | SCY-1S | SCY-2S | SCY-3S | SCY-4S | SCY-6S | SCY-8S |
|---------------------------|--------|--------|--------|--------|--------|--------|
| Min. cross-sectional area | 15     | 23     | 28     | 71     | 110    | 162    |

### Flow Rate – Pressure Loss Characteristics

[Test conditions] • Fluid : Water • Temperature : 21°C to 32°C

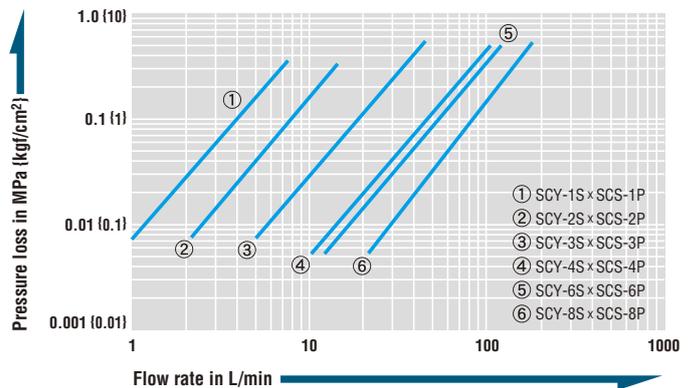

### Interchangeability

Can be connected with plugs of SCS Type of the same size.

### Interchangeability Check List (SCS Type, SCY Type)


● indicates connection capability except for made-to-order products.

| Plug SCS Type | Model | Socket SCY Type |     |          |     |     |     |     |     |
|---------------|-------|-----------------|-----|----------|-----|-----|-----|-----|-----|
|               |       | SCS Type        |     | SCY Type |     |     |     |     |     |
|               |       | -1S             | -2S | -1S      | -2S | -3S | -4S | -6S | -8S |
| -1P           |       | ●               |     | ●        |     |     |     |     |     |
| -2P           |       |                 | ●   |          | ●   |     |     |     |     |
| -3P           |       |                 |     |          |     | ●   |     |     |     |
| -4P           |       |                 |     |          |     |     | ●   |     |     |
| -6P           |       |                 |     |          |     |     |     | ●   |     |
| -8P           |       |                 |     |          |     |     |     |     | ●   |

### Models and Dimensions

WAF : WAF stands for width across flats.

### Socket Female thread

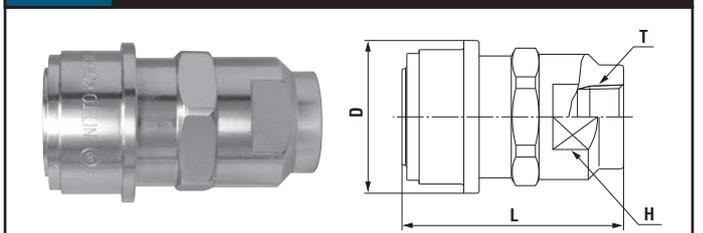

| Model      | Container capacity | Mass (g) | Dimensions (mm) |    |         |                   |
|------------|--------------------|----------|-----------------|----|---------|-------------------|
|            |                    |          | L               | øD | H (WAF) | T (Female thread) |
| SCY-1S     | For 10L to 20L     | 116      | (48)            | 29 | 18      | Rc 1/8            |
| SCY-1S-NPT | For 10L to 20L     |          |                 |    |         | 1/8-27NPT         |
| SCY-2S     | For 10L to 20L     | 180      | (58)            | 33 | 22      | Rc 1/4            |
| SCY-2S-NPT | For 10L to 20L     |          |                 |    |         | 1/4-18NPT         |
| SCY-3S     | For 100L to 200L   | 292      | (65)            | 39 | 27      | Rc 3/8            |
| SCY-4S     | For 100L to 200L   | 519      | (72)            | 50 | 35      | Rc 1/2            |
| SCY-6S     | For 100L to 200L   | 862      | (88)            | 59 | 41      | Rc 3/4            |
| SCY-8S     | For 100L to 200L   | 1360     | (102)           | 68 | 50      | Rc 1              |

Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.

# For High Purity Chemicals

# Semicon Cupla

## SCT Type

For semiconductor manufacturing equipment

|   |   |   |
|---|---|---|
| Working pressure<br><br>0.2 MPa<br>(2 kgf/cm <sup>2</sup> ) | Valve structure<br><br>Two-way shut-off | Applicable fluids<br><br>High purity chemicals<br>Water<br>Gas<br>Air |
|---|---|---|

## Polytetrafluoroethylene (PTFE) is utilised for the body.

- Polytetrafluoroethylene (PTFE) body gives excellent resistance to chemicals.
- Both socket and plug have built-in automatic shut-off valves that prevent fluid from outflowing when disconnected.
- No dissolution of metal ions from part in contact with liquid ensures excellent reliability.
- All components are cleaned, assembled, inspected and then packed in a clean room.
- Appropriate model can be selected from a wide variety of sizes to suit your application / fluid.
- Optional keyway lock to prevent incorrect connection.  
10 keyway patterns are available.




| Specifications            |   |                           |      |                           |                   |
|---------------------------|---|---------------------------|------|---------------------------|-------------------|
| Body material             | Polytetrafluoroethylene (PTFE)  |                           |      |                           |                   |
| Size (Thread)             | 1/4", 3/8", 1/2", 3/4", 1"<br>1/4-18NPT, 3/8-18NPT, 1/2-14NPT, 3/4-14NPT, 1-11.5NPT |                           |      |                           |                   |
| Working pressure          | MPa   | 0.2                       |      |                           |                   |
|                           | kgf/cm <sup>2</sup>   | 2                         |      |                           |                   |
|                           | bar   | 2                         |      |                           |                   |
|                           | PSI   | 29                        |      |                           |                   |
| Seal material             | Socket  | Seal material             | Mark | Working temperature range | Remarks           |
| Working temperature range | O-ring  | FEP-covered fluoro rubber | —    | +5°C to +50°C             | Standard material |
|                           | Valve   | Fluoropolymer resin       |      |                           |                   |

| Min. Cross-Sectional Area (mm <sup>2</sup> ) |         |         |         |         |         |
|--|---------|---------|---------|---------|---------|
| Model  | SCT-2SP | SCT-3SP | SCT-4SP | SCT-6SP | SCT-8SP |
| Min. cross-sectional area                    | 12      | 34      | 54      | 103     | 225     |

### Flow Rate – Pressure Loss Characteristics

[Test conditions] • Fluid : Water • Temperature : 23°C ± 3°C

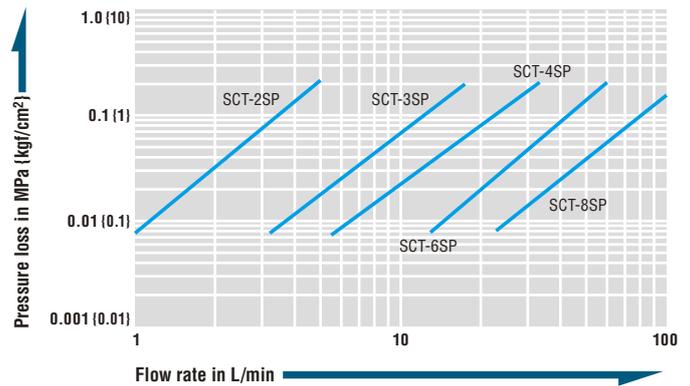

### Interchangeability

Different sizes are not interchangeable.

### Models and Dimensions

WAF : WAF stands for width across flats.

| Plug       |          | Female thread   |      |      |        |                  |
|------------|----------|-----------------|------|------|--------|------------------|
|            |          |                 |      |      |        |                  |
| Model      | Mass (g) | Dimensions (mm) |      |      |        |                  |
|            |          | L               | A    | øC   | H(WAF) | T(Female thread) |
| SCT-2P     | 43       | 59              | 30.5 | 27.5 | 24     | Rc 1/4           |
| SCT-2P-NPT |          |                 |      |      |        | 1/4-18NPT        |
| SCT-3P     | 77       | 68.5            | 33.5 | 34.5 | 30     | Rc 3/8           |
| SCT-3P-NPT |          |                 |      |      |        | 3/8-18NPT        |
| SCT-4P     | 91       | 69.5            | 37.5 | 39.5 | 36     | Rc 1/2           |
| SCT-4P-NPT |          |                 |      |      |        | 1/2-14NPT        |
| SCT-6P     | 160      | 78.5            | 45   | 48   | 41     | Rc 3/4           |
| SCT-6P-NPT |          |                 |      |      |        | 3/4-14NPT        |
| SCT-8P     | 300      | 112             | 60.5 | 59   | 50     | Rc 1             |
| SCT-8P-NPT |          |                 |      |      |        | 1-11.5NPT        |

| Socket     |          | Female thread   |      |        |                  |    |
|------------|----------|-----------------|------|--------|------------------|----|
|            |          |                 |      |        |                  |    |
| Model      | Mass (g) | Dimensions (mm) |      |        |                  |    |
|            |          | L               | øD   | H(WAF) | T(Female thread) | D  |
| SCT-2S     | 101      | 89.5            | 41   | 19     | Rc 1/4           | 19 |
| SCT-2S-NPT |          |                 |      |        |                  |    |
| SCT-3S     | 156      | 102             | 49.5 | 24     | Rc 3/8           | 24 |
| SCT-3S-NPT |          |                 |      |        |                  |    |
| SCT-4S     | 192      | 107             | 54.5 | 30     | Rc 1/2           | 30 |
| SCT-4S-NPT |          |                 |      |        |                  |    |
| SCT-6S     | 340      | 123             | 68   | 36     | Rc 3/4           | 36 |
| SCT-6S-NPT |          |                 |      |        |                  |    |
| SCT-8S     | 770      | 172.5           | 82   | 46     | Rc 1             | 46 |
| SCT-8S-NPT |          |                 |      |        |                  |    |

\* Available end configurations are female ISO Rc thread and female NPT thread.

\* Plug or socket with female ISO Rc end configuration has V-groove on the body as identification. (In case of female NPT thread, no V-groove on either plug or socket body).

\* Please inquire for other end configurations other than female thread (e.g. flanged or male thread).

# For High Purity Chemicals

# Semicon Cupla

## SCAL Type

For semiconductor manufacturing equipment

|                                     |                                 |                          |       |     |     |
|-------------------------------------|---------------------------------|--------------------------|-------|-----|-----|
| <b>Working pressure</b>             | <b>Valve structure</b>          | <b>Applicable fluids</b> |       |     |     |
|                                     |                                 |                          |       |     |     |
| 0.2 MPa<br>(2 kgf/cm <sup>2</sup> ) | Two-way shut-off<br>(Non-Spill) | High purity<br>chemicals | Water | Gas | Air |

## Body is polytetrafluoroethylene (PTFE).

- Polytetrafluoroethylene (PTFE) body gives excellent resistance to chemicals.
- Unique seal design ensures minimal liquid spill.
- Both socket and plug have built-in automatic shut-off valves that prevent fluid from outflowing when disconnected.
- No dissolution of metal ions from part in contact with liquid ensures excellent reliability.
- Push-to-connect design.
- Flanged socket body makes it easy to push down sleeve even when wearing gloves.
- All components are cleaned, assembled, inspected and then packed in a clean room.
- Concaved surface of the plug end prevents liquid loss and protects the plug seal surface from damage if dropped or hit.
- To prevent incorrect connection, a keyed type sleeve is available on a made-to-order basis.
- Ten key angle positions are available. The appearance of the keyed type body slightly differs from that of the standard type.



Made-to-order item

Flange type

### Specifications


|                           |   |                           |      |                           |                   |
|---------------------------|---|---------------------------|------|---------------------------|-------------------|
| <b>Body material</b>      | Polytetrafluoroethylene (PTFE)  |                           |      |                           |                   |
| <b>Size (Thread)</b>      | 1/4", 3/8", 1/2", 3/4", 1"<br>1/4-18NPT, 3/8-18NPT, 1/2-14NPT, 3/4-14NPT, 1-11.5NPT |                           |      |                           |                   |
| <b>Working pressure</b>   | MPa   | 0.2                       |      |                           |                   |
|                           | kgf/cm <sup>2</sup>   | 2                         |      |                           |                   |
|                           | bar   | 2                         |      |                           |                   |
|                           | PSI   | 29                        |      |                           |                   |
| <b>Seal material</b>      | Socket  | Seal material             | Mark | Working temperature range | Remarks           |
| Working temperature range | O-ring  | Perfluoroelastomer        | P    | +5°C to +50°C             | Standard material |
|                           | Valve   | Fluoropolymer resin (PFA) |      |                           |                   |

### Min. Cross-Sectional Area (mm<sup>2</sup>)

| Model (SCAL-□)            | 2S (-NPT)<br>2P (-NPT) | 3S (-NPT)<br>3P (-NPT) | 4S (-NPT)<br>4P (-NPT) | 6S (-NPT)<br>6P (-NPT) | 8S (-NPT)<br>8P (-NPT) | 12S (-NPT/-FL-P)<br>12P (-NPT/-FL-P) |
|---------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|--------------------------------------|
| Min. Cross-Sectional Area | 24                     | 41                     | 59                     | 108                    | 234                    | 611                                  |

### Flow Rate – Pressure Loss Characteristics

[Test conditions] • Fluid : Water • Temperature : 20°C ± 5°C

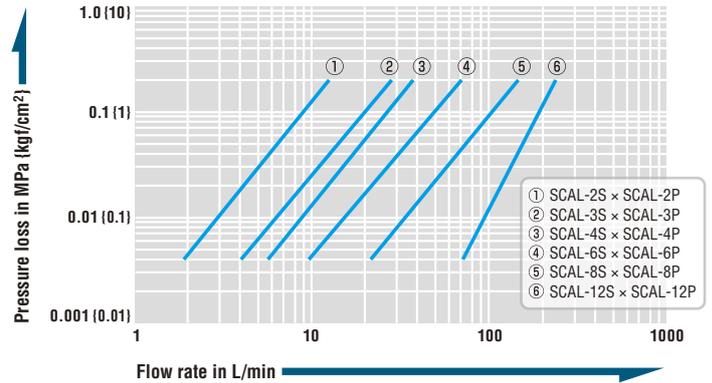

### Volume of Spillage per Disconnection (mL)

| Model (SCAL-□)     | 2S (-NPT)<br>2P (-NPT) | 3S (-NPT)<br>3P (-NPT) | 4S (-NPT)<br>4P (-NPT) | 6S (-NPT)<br>6P (-NPT) | 8S (-NPT)<br>8P (-NPT) | 12S (-NPT/-FL-P)<br>12P (-NPT/-FL-P) |
|--------------------|------------------------|------------------------|------------------------|------------------------|------------------------|--------------------------------------|
| Volume of spillage | 0.07                   | 0.09                   | 0.13                   | 0.20                   | 0.59                   | 1.26                                 |


### Interchangeability

Different sizes are not interchangeable.

### Models and Dimensions

WAF : WAF stands for width across flats.


#### Plug Female thread

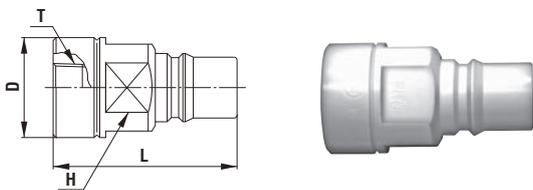

| Model         | Mass (g) | Dimensions (mm) |      |        |                  |
|---------------|----------|-----------------|------|--------|------------------|
|               |          | L               | ∅D   | H(WAF) | T(Female thread) |
| SCAL-2P       | 37       | 50              | 27.5 | 24     | Rc 1/4           |
| SCAL-2P-NPT   |          |                 |      |        | 1/4-18NPT        |
| SCAL-3P       | 73       | 63              | 34.5 | 30     | Rc 3/8           |
| SCAL-3P-NPT   |          |                 |      |        | 3/8-18NPT        |
| SCAL-4P       | 107      | 72              | 39.5 | 36     | Rc 1/2           |
| SCAL-4P-NPT   |          |                 |      |        | 1/2-14NPT        |
| SCAL-6P       | 153      | 77              | 48   | 41     | Rc 3/4           |
| SCAL-6P-NPT   |          |                 |      |        | 3/4-14NPT        |
| SCAL-8P       | 348      | 109             | 59   | 50     | Rc 1             |
| SCAL-8P-NPT   |          |                 |      |        | 1-11.5NPT        |
| *SCAL-12P-NPT | 740      | 126             | 80   | 75     | 1 1/2-11.5NPT    |

\*Made-to-order item

#### Socket Female thread

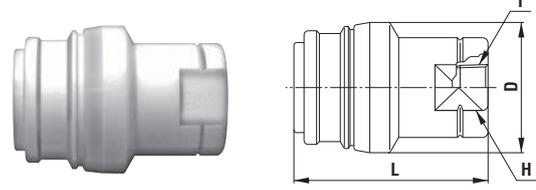

| Model         | Mass (g) | Dimensions (mm) |      |        |                  |
|---------------|----------|-----------------|------|--------|------------------|
|               |          | L               | ∅D   | H(WAF) | T(Female thread) |
| SCAL-2S       | 97       | (60.5)          | 40.5 | 27     | Rc 1/4           |
| SCAL-2S-NPT   |          |                 |      |        | 1/4-18NPT        |
| SCAL-3S       | 135      | (69.5)          | 47   | 32     | Rc 3/8           |
| SCAL-3S-NPT   |          |                 |      |        | 3/8-18NPT        |
| SCAL-4S       | 177      | (76)            | 52   | 36     | Rc 1/2           |
| SCAL-4S-NPT   |          |                 |      |        | 1/2-14NPT        |
| SCAL-6S       | 339      | (90)            | 65   | 46     | Rc 3/4           |
| SCAL-6S-NPT   |          |                 |      |        | 3/4-14NPT        |
| SCAL-8S       | 656      | (109)           | 80   | 60     | Rc 1             |
| SCAL-8S-NPT   |          |                 |      |        | 1-11.5NPT        |
| *SCAL-12S-NPT | 1580     | (144.5)         | 108  | 80     | 1 1/2-11.5NPT    |

\*Made-to-order item

- Plug comes with a cap made of high density polyethylene (HDPE).
- Outer appearance of NPT thread type differs slightly from that of the above.
- Please contact us about end configurations other than female thread such as flange and male thread.
- Excessive tightening will damage the threaded part and result in leakage.
- Note: A very small amount of gas can permeate polytetrafluoroethylene (PTFE) bellows in the socket.

Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.

# For High Purity Chemicals

# Semicon Cupla

## SCF Type

For semiconductor manufacturing equipment

|  |   |  |
|--|---|--|
| <b>Working pressure</b>  | <b>Valve structure</b>  | <b>Applicable fluids</b>   |
| <br>0.2 MPa<br>(2 kgf/cm <sup>2</sup> ) | <br>Two-way shut-off |  High purity chemicals<br> Water<br> Gas<br> Air |

## All plastic model. Fluoropolymer resin (PFA) body is injection molded.

- All parts made of fluoropolymer resin. O-rings in particular are FEP-covered fluororubber with excellent chemical resistance and no rubber elution.
- Unique new techniques such as “injection molding”, “tube connect system” and “nut type plug mount design” are used to prevent the generation of particles, incessant headache for semiconductor parts manufacturers.
- To connect with a plug, just push the socket on to it. Disconnection is done in simple and one-handed button operation.
- Unique “double lock mechanism” prevents accidental disconnection of socket and plug.
- Branched tube port improves operability and reduces required piping space.
- Plugs come with a dust cap.
- All components are cleaned, assembled, inspected, and then packed in a clean room.



Please read “How to attach a tube to the socket” described on the page of “Maintenance of Cuplas” at the end of this book.

Resin containers

### Specifications

|                           |                     |                           |      |                           |                   |
|---------------------------|---------------------|---------------------------|------|---------------------------|-------------------|
| Body material             |                     | Fluoropolymer resin (PFA) |      |                           |                   |
| Size                      | Thread              | 3/8", 1/2" / M26, M32     |      |                           |                   |
|                           | Tube barb           | ø6 x ø8, ø8 x ø10         |      |                           |                   |
| Working pressure          | MPa                 | 0.2                       |      |                           |                   |
|                           | kgf/cm <sup>2</sup> | 2                         |      |                           |                   |
|                           | bar                 | 2                         |      |                           |                   |
|                           | PSI                 | 29                        |      |                           |                   |
| Seal material             | Socket O-ring       | Seal material             | Mark | Working temperature range | Remarks           |
| Working temperature range | Valve               | FEP-covered fluoro rubber | -    | +5°C to +50°C             | Standard material |
|                           |                     | Fluoropolymer resin (PFA) |      |                           |                   |


### Min. Cross-Sectional Area

(mm<sup>2</sup>)

|                         |         |         |
|-------------------------|---------|---------|
| Model                   | SCF-2SP | SCF-3SP |
| Min. cross-sectional ar | 23.8    | 44.2    |

### Flow Rate – Pressure Loss Characteristics

[Test conditions] • Fluid : Water • Temperature : 21°C to 23°C

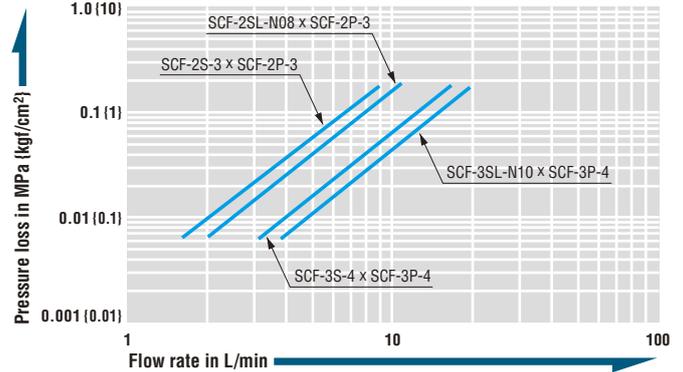


### Interchangeability

Different sizes are not interchangeable.

### Reference diagram

The thread dimensions of container side for the plug.

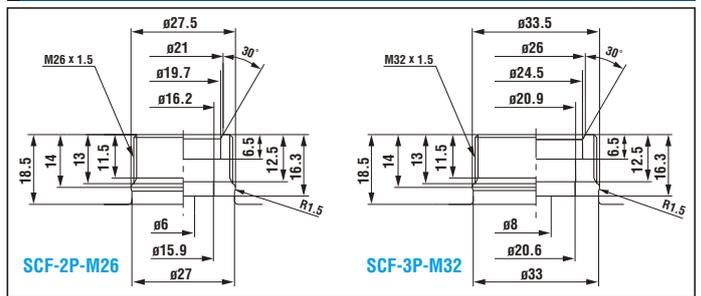

For tolerance and other specific dimensions, consult us.

### Models and Dimensions

WAF : WAF stands for width across flats.

| Plug       | Female thread      |          | Dimensions (mm) |                |        |                  |
|------------|--------------------|----------|-----------------|----------------|--------|------------------|
|            | Container capacity | Mass (g) | L               | D(WAF)         | C      | T(Female thread) |
| SCF-2P-M26 | For 10L to 20L     | 33       | (53.7)          | Hex.30 x ø32.5 | (31.2) | M26 x 1.5        |
| SCF-3P-M32 | For 10L to 20L     | 50       | (57.7)          | Hex.36 x ø39   | (35.2) | M32 x 1.5        |

| Plug     | Straight type (Female thread) |        | Dimensions (mm) |      |        |        |    |                  |
|----------|-------------------------------|--------|-----------------|------|--------|--------|----|------------------|
|          | Mass (g)                      | L      | C               | øD   | H(WAF) | A(WAF) | øB | T(Female thread) |
| SCF-2P-3 | 53                            | (67.2) | (31.2)          | 32.5 | Hex.30 | 24     | 27 | Rc 3/8           |
| SCF-3P-4 | 79                            | (71.2) | (35.2)          | 39   | Hex.36 | 30     | 33 | Rc 1/2           |

| Socket      | For tube connection |          | Dimensions (mm) |    |      |                 |
|-------------|---------------------|----------|-----------------|----|------|-----------------|
|             | Container capacity  | Mass (g) | L               | D  | E    | Applicable tube |
| SCF-2SL-N08 | For 10L to 20L      | 76       | 77              | 34 | (45) | ø6 x ø8         |
| SCF-3SL-N10 | For 10L to 20L      | 116      | 85              | 39 | (51) | ø8 x ø10        |

| Socket   | Straight type (Female thread) |         | Dimensions (mm) |        |    |      |                  |
|----------|-------------------------------|---------|-----------------|--------|----|------|------------------|
|          | Mass (g)                      | L       | øA              | H(WAF) | D  | E    | T(Female thread) |
| SCF-2S-3 | 83                            | (92)    | 27              | 24     | 34 | (45) | Rc 3/8           |
| SCF-3S-4 | 124                           | (102.5) | 33              | 30     | 39 | (51) | Rc 1/2           |

Before use, please be sure to read “Safety Guide” described at the end of this book and “Instruction Sheet” that comes with the products.

For Paint

# Paint Cupla

Piping for painting equipment

Working pressure



Valve structure



Applicable fluid



## Quick connection and disconnection of paint spray gun and paint fluid line is realized.

- Unique swing connection system enables easy connection and disconnection of paint spray gun and paint hose even by gloved hands.
- Full-open gate valve mechanism prevents paint precipitate buildup.
- Adoption of special resin seal that has resistance against solvents made it possible to feature superior durability, long stable capability, and easy cleaning of paint spray gun after the job.
- Connection and disconnection can be made even if paint sticks to the socket sleeve.
- Small and lightweight design (80 g per set) reduces the weight to be held by hand of operators.
- Built-in sleeve lock mechanism prevents accidental disconnection of Cuplas, ensuring safe operation.
- Wide variety of end configurations (standard thread: G 3/8) are available in response to various paint spray guns.




### Flow Direction

Fluid must run from socket to plug.



### Models and Dimensions

#### Plug PE-3P type (Female thread)

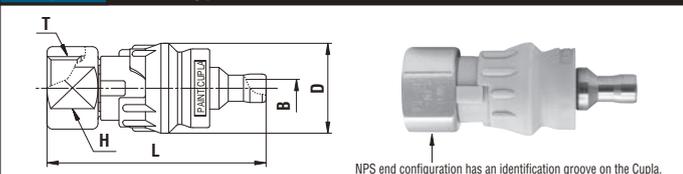

NPS end configuration has an identification groove on the Cupla.

| Model     | Application | Mass (g) | Dimensions (mm) |    |     |          |         |
|-----------|-------------|----------|-----------------|----|-----|----------|---------|
|           |             |          | L               | øD | øB  | H(WAF)   | T       |
| PE-3P-G   | G 3/8       | 31       | (58)            | 24 | 4.5 | 19 x ø22 | G 3/8   |
| PE-3P-NPS | 3/8 NPS     | 31       | (58)            | 24 | 4.5 | 19 x ø22 | 3/8 NPS |

### Specifications

|                  |  |      |     |                           |              |         |                   |
|------------------|--|------|-----|---------------------------|--------------|---------|-------------------|
| Body material    | Socket: Aluminum Plug: Stainless steel |      |     |                           |              |         |                   |
| Size (Thread)    | 3/8", 3/8NPS                           |      |     |                           |              |         |                   |
| Working pressure | MPa                                    | 1.0  |     |                           |              |         |                   |
|                  | kgf/cm <sup>2</sup>                    | 10   |     |                           |              |         |                   |
|                  | bar                                    | 10   |     |                           |              |         |                   |
|                  | PSI                                    | 145  |     |                           |              |         |                   |
| Seal material    | Fluoro-resin                           | Mark | PFA | Working temperature range | 0°C to +50°C | Remarks | Standard material |

### Tightening Torque Range

|        |          |
|--------|----------|
| Torque | 15 {153} |
|--------|----------|

### Interchangeability


Only the same size of paint Cuplas can be connected each other.

### Suitability for Vacuum

Not suitable for vacuum application in either connected or disconnected condition.

### Flow Rate – Pressure Loss Characteristics


[Test conditions] • Fluid viscosity : 8 x 10<sup>-7</sup> m<sup>2</sup>/s (Equivalent to water) • Temperature : 30°C ± 5°C

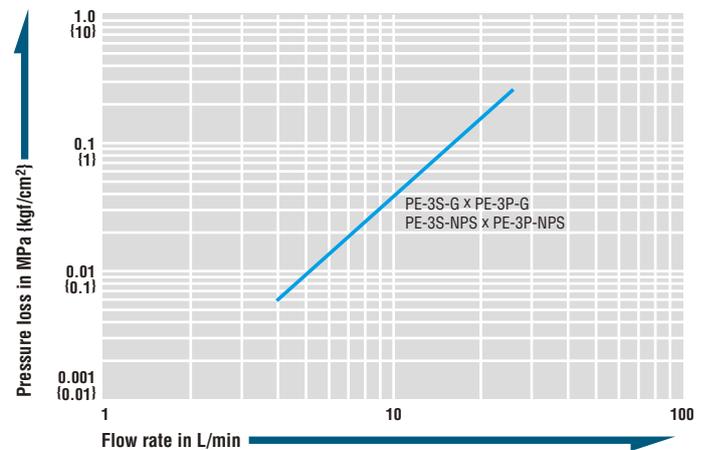


### Connection and Disconnection

#### Connection

Align the key on plug cover to the slot on sleeve, then while pulling the socket sleeve insert the plug to the hilt.

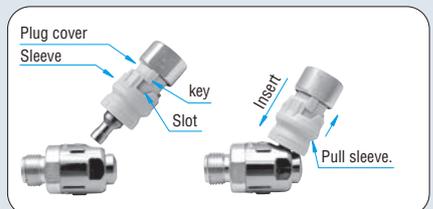

While keeping the plug inserted into the socket, tilt the plug so as to align the plug with the socket. Lock can be made by turning the sleeve.

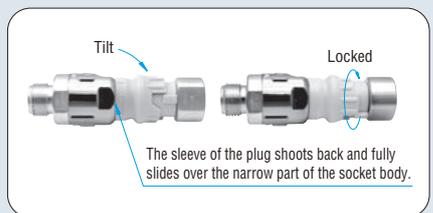


#### Disconnection

Disconnect in the reverse order of connection.

WAF : WAF stands for width across flats.


#### Socket PE-3S type (Male thread)

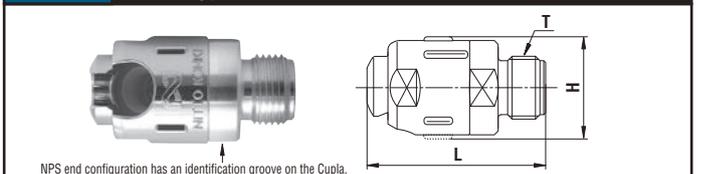

NPS end configuration has an identification groove on the Cupla.

| Model     | Application | Mass (g) | Dimensions (mm) |          |         |
|-----------|-------------|----------|-----------------|----------|---------|
|           |             |          | L               | H(WAF)   | T       |
| PE-3S-G   | G 3/8       | 48       | (47)            | 23 x ø27 | G 3/8   |
| PE-3S-NPS | 3/8 NPS     | 48       | (47)            | 23 x ø27 | 3/8 NPS |

Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.

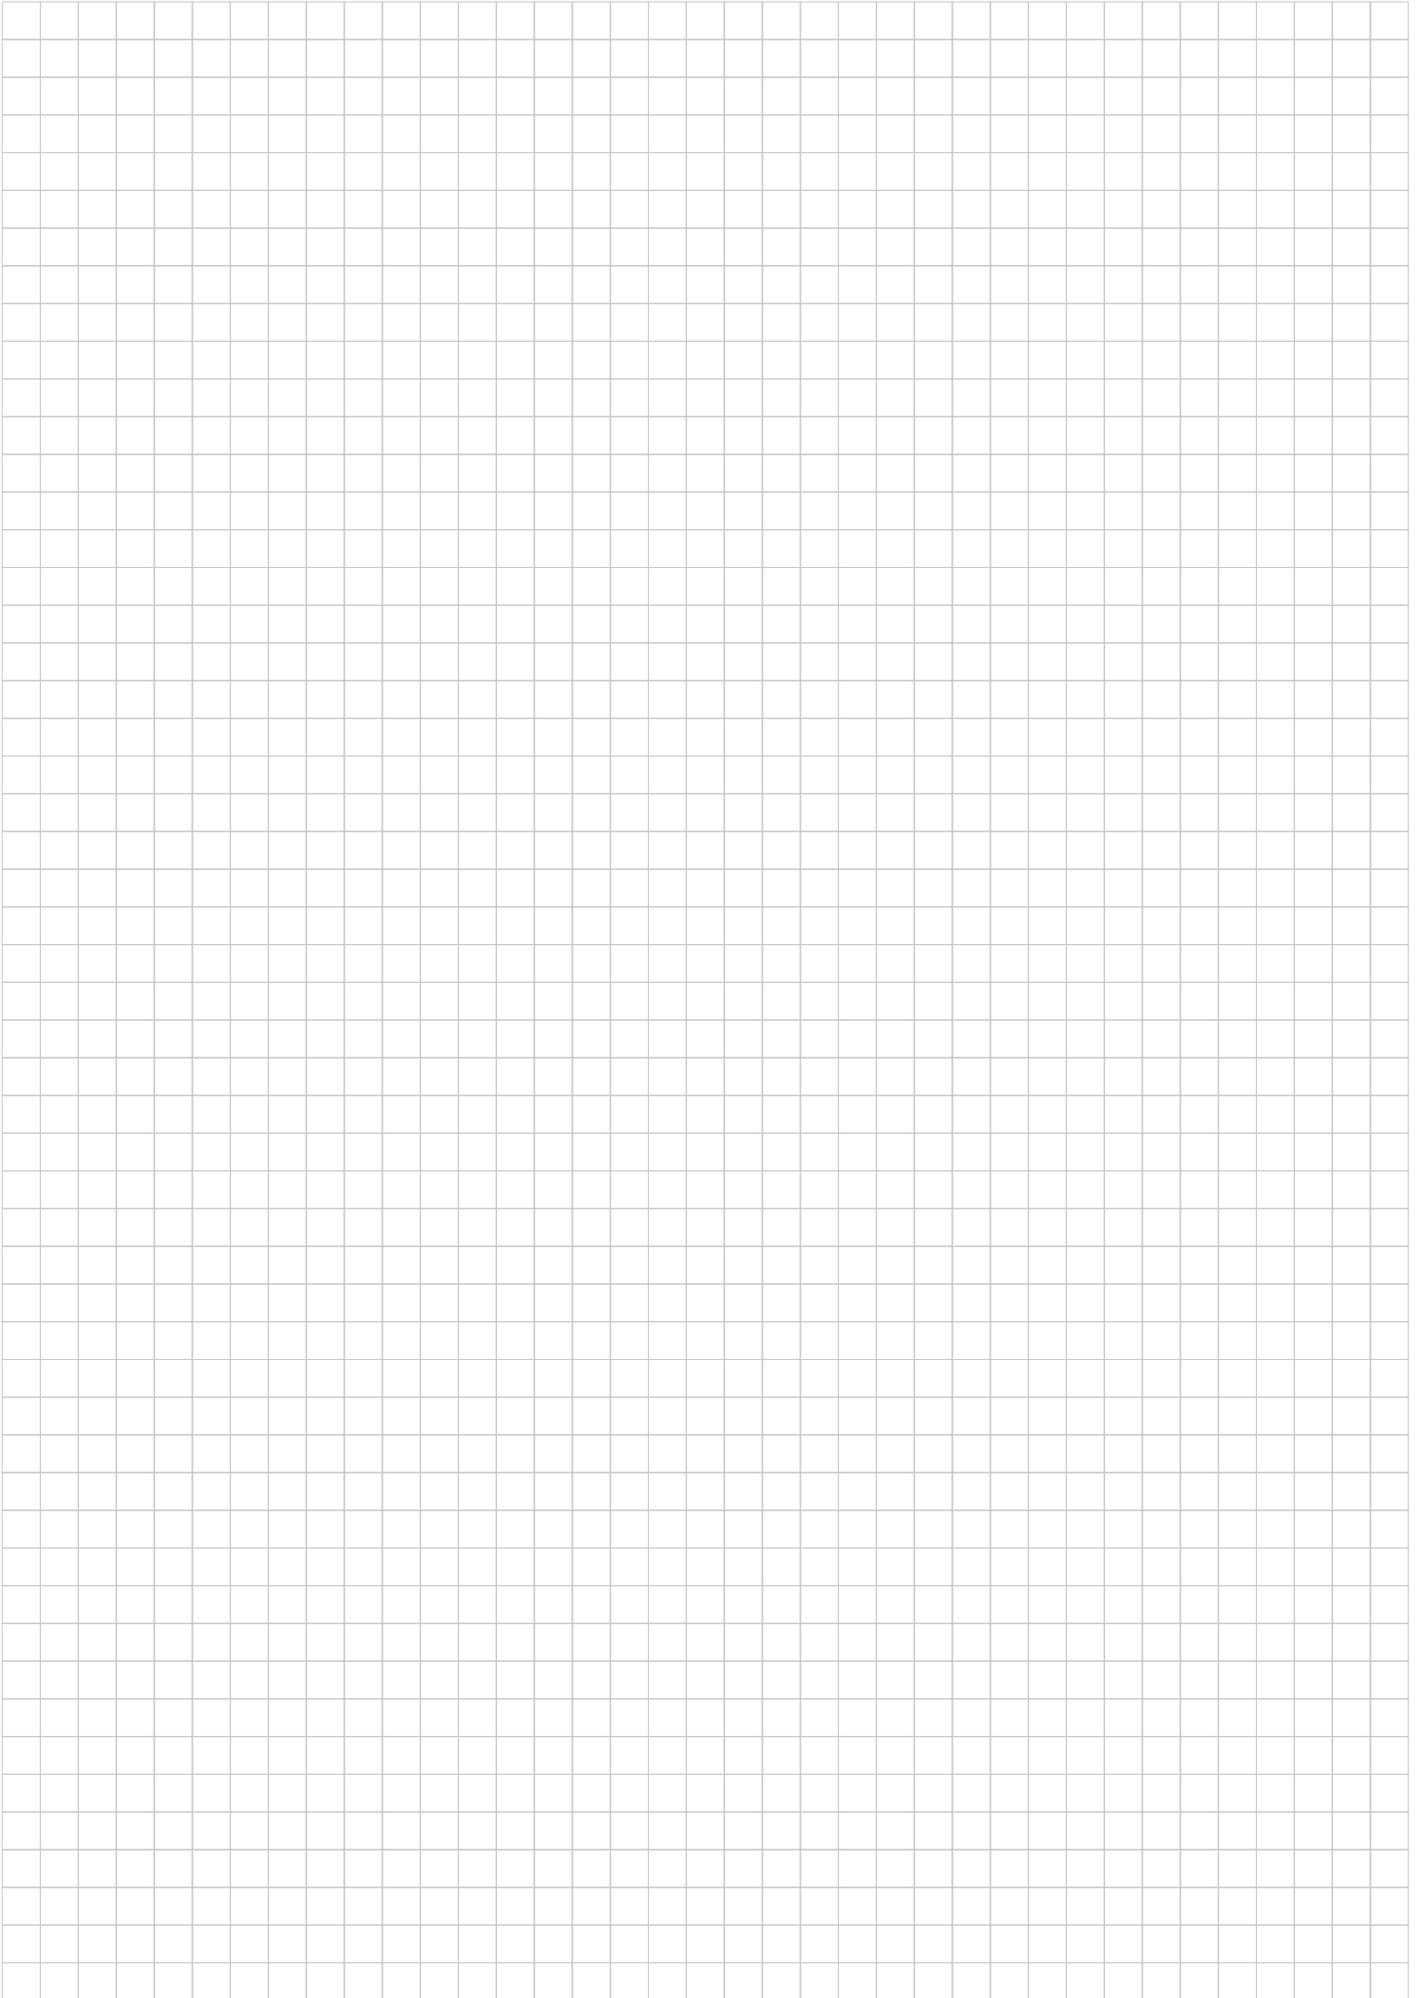

# For Inert Gas and Vacuum

# SP-V Cupla

## For vacuum

### Working pressure



### Valve structure




### Applicable fluids



**Automatic shut-off valves in both socket and plug for vacuum applications. Each can withstand a vacuum of as high as  $1.3 \times 10^{-1}$  Pa even when disconnected.**

- Uses automatic shut-off valves with ultra-tight sealed construction in both socket and plug. Ideal for vacuum applications.
- Having automatic shut-off valves in both socket and plug facilitates easy fluid handling. Suitable for a wide range of vacuum applications as high as  $1.3 \times 10^{-1}$  Pa ( $1 \times 10^{-3}$  mmHg) even when disconnected.
- Three types of seal material are available to suit any of the diversified production lines for air conditioners, refrigerators or similar.
- Can be connected with SP Cupla Type A.

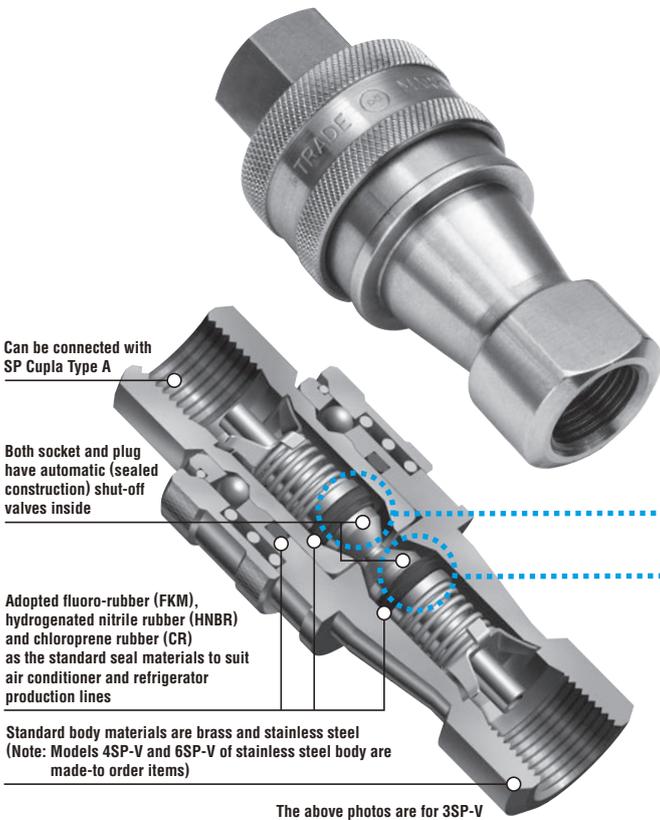


Can be connected with SP Cupla Type A

Both socket and plug have automatic (sealed construction) shut-off valves inside

Adopted fluoro-rubber (FKM), hydrogenated nitrile rubber (HNBR) and chloroprene rubber (CR) as the standard seal materials to suit air conditioner and refrigerator production lines

Standard body materials are brass and stainless steel (Note: Models 4SP-V and 6SP-V of stainless steel body are made-to order items)

The above photos are for 3SP-V

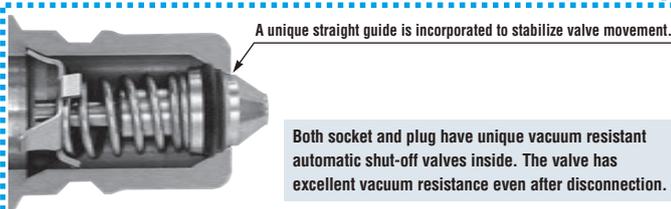

A unique straight guide is incorporated to stabilize valve movement.

Both socket and plug have unique vacuum resistant automatic shut-off valves inside. The valve has excellent vacuum resistance even after disconnection.

## Specifications

| Body material    | Brass (Standard material) |                             | Stainless steel (Standard material) | Stainless steel (Made-to-order item) |                   |                   |
|------------------|---------------------------|-----------------------------|-------------------------------------|--------------------------------------|-------------------|-------------------|
|                  | 1/4", 3/8"                | 1/2", 3/4"                  | 1/4", 3/8"                          | 1/2", 3/4"                           |                   |                   |
| Working pressure | MPa                       | 5.0                         | 3.0                                 | 7.5                                  | 4.5               |                   |
|                  | kgf/cm <sup>2</sup>       | 51                          | 31                                  | 76                                   | 46                |                   |
|                  | bar                       | 50                          | 30                                  | 75                                   | 45                |                   |
|                  | PSI                       | 725                         | 435                                 | 1090                                 | 653               |                   |
| Seal material    | Seal material             | Chloroprene rubber          | CR (C308)                           | Working temperature range            | -20°C to +80°C    | Standard material |
|                  | Working temperature range | Fluoro rubber               | FKM (X-100)                         | -20°C to +180°C                      | Standard material |                   |
|                  |                           | Hydrogenated nitrile rubber | HNBR (H708)                         | -20°C to +120°C                      | Standard material |                   |
|                  |                           | Mark                        |                                     |                                      | Remarks           |                   |

## Max. Tightening Torque

Nm {kgf·cm}

| Size (Thread) | 1/4"            | 3/8"     | 1/2"     | 3/4"     |          |
|---------------|-----------------|----------|----------|----------|----------|
| Torque        | Brass           | 9 {92}   | 12 {122} | 30 {306} | 50 {510} |
|               | Stainless steel | 14 {143} | 22 {224} | 60 {612} | 90 {918} |

## Flow Direction

Fluid may flow in either direction from plug or from socket side when coupled.



## Interchangeability

Socket and plug with different sizes cannot be connected to each other. Interchangeable with SP Cupla Type A but take heed of flow rate reduction.

## Min. Cross-Sectional Area

(mm<sup>2</sup>)

| Model                     | 2SP-V | 3SP-V | 4SP-V | 6SP-V |
|---------------------------|-------|-------|-------|-------|
| Min. cross-sectional area | 18    | 38    | 71    | 110   |

## Suitability for Vacuum

$1.3 \times 10^{-1}$  Pa { $1 \times 10^{-3}$  mmHg}

| Socket only | Plug only   | When connected |
|-------------|-------------|----------------|
| Operational | Operational | Operational    |

## Admixture of Air on Connection


Admixture of air may vary depending upon the usage conditions.

(mL)

| Model         | 2SP-V | 3SP-V | 4SP-V | 6SP-V |
|---------------|-------|-------|-------|-------|
| Volume of air | 1.0   | 2.4   | 3.2   | 10.5  |


## Flow Rate – Pressure Loss Characteristics

[Test conditions] • Fluid : Water • Temperature: 24°C ± 6°C

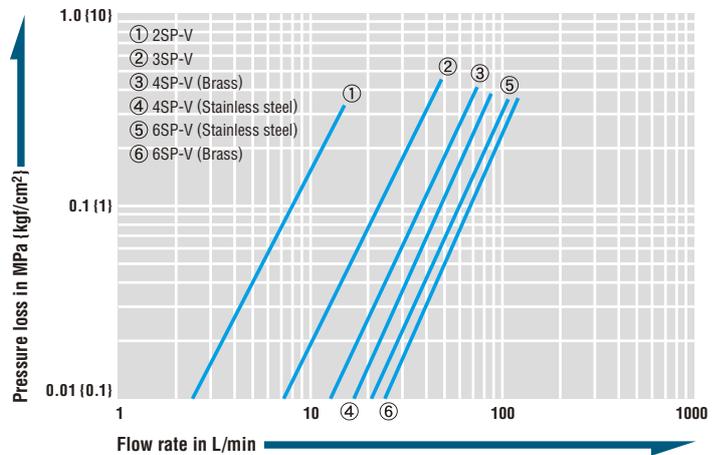


Models and Dimensions

**Plug Female thread**

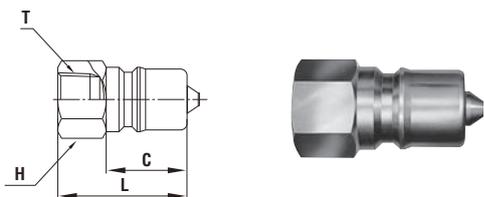

| Model | Application | Mass (g) |                 | Dimensions (mm) |        |    |        |
|-------|-------------|----------|-----------------|-----------------|--------|----|--------|
|       |             | Brass    | Stainless steel | L               | H(WAF) | C  | T      |
| 2P-V  | R 1/4       | 39       | 34              | 36              | Hex.17 | 22 | Rc 1/4 |
| 3P-V  | R 3/8       | 67       | 59              | 40              | Hex.21 | 25 | Rc 3/8 |
| 4P-V  | R 1/2       | 123      | 118             | 44              | Hex.29 | 28 | Rc 1/2 |
| 6P-V  | R 3/4       | 211      | 202             | 52              | Hex.35 | 36 | Rc 3/4 |

**Socket Female thread**

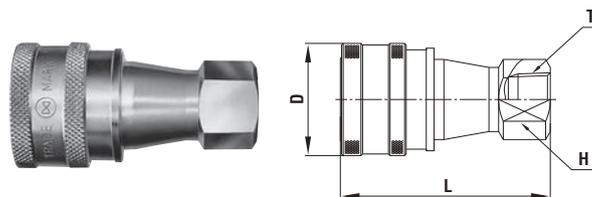

| Model | Application | Mass (g) |                 | Dimensions (mm) |      |        |        |
|-------|-------------|----------|-----------------|-----------------|------|--------|--------|
|       |             | Brass    | Stainless steel | L               | øD   | H(WAF) | T      |
| 2S-V  | R 1/4       | 136      | 127             | 58              | (28) | 19     | Rc 1/4 |
| 3S-V  | R 3/8       | 217      | 197             | 65              | (35) | 21     | Rc 3/8 |
| 4S-V  | R 1/2       | 421      | 393             | 72              | (45) | 29     | Rc 1/2 |
| 6S-V  | R 3/4       | 709      | 658             | 88              | (55) | 35     | Rc 3/4 |

• The sleeve shape of 4S-V and 6S-V differs from that of the above photo.


**Seal Materials for Refrigerants**

Various eco-friendly refrigerants for air conditioner and refrigerator have been developed. Nitto Kohki, having invested years in the research and development of excellent seal materials to withstand refrigerants and refrigerant oils, has made early attempts to develop and manufacture the seal materials for these eco-friendly refrigerants.

|             | Seal material  |   |
|-------------|--|---|
|             | Hydrogenated nitrile rubber  | Chloroprene rubber  |
| Mark        | HNBR (H708)  | CR (C308)   |
| Features    | Resistant to hydrofluorocarbons (HFC-134a, HFC-407C, HFC-410A, HFC-404A), and PAG type and ester type oils. Also resistant to heat up to 120°C | Excellent resistance to hydrofluorocarbons (HCFC-22 and HFC-134a) |
| Application | Refrigerator production lines<br>Air conditioner production lines  | Air conditioner production lines                                  |

**Comparison of External Appearance**

When two different gases are used simultaneously in the production lines, SP-V-GN type and SP-V-GNN type (non-interchangeable with standard SP-V and each others) may be required in order to prevent connections to improper lines by mistakes. They are made-to-order items. For details please contact Nitto Kohki direct or its distributor in your country.

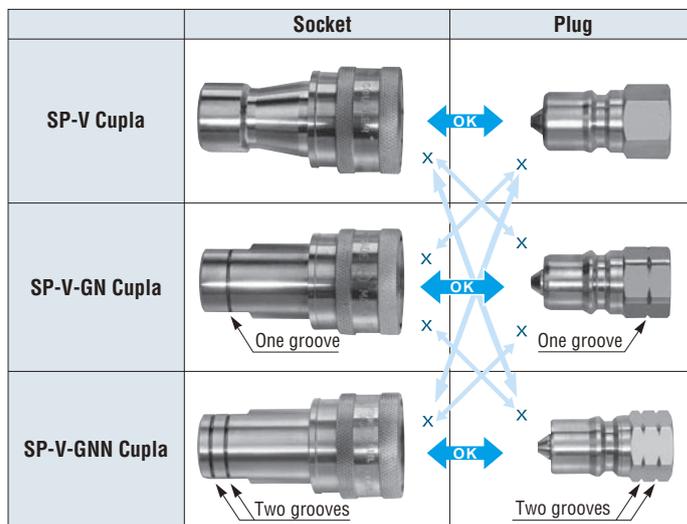

X indicates incompatibility.

**Application Example**



For Inert Gas and Vacuum

# PCV Pipe Cupla

For connection to copper pipes

Working pressure

**4.5**

4.5 MPa  
(46 kgf/cm<sup>2</sup>)

Valveless

Applicable fluids



Inert gas,  
Vacuum

Air

Gas

**Clamps directly on straight copper pipes !**  
**Double seal construction withstands a vacuum of up to  $1.3 \times 10^{-1}$  Pa.**

- Clamps directly on to a straight copper pipe eliminating unnecessary welding or flaring.
- Withstands a vacuum of up to  $1.3 \times 10^{-1}$  Pa (when connected) making it possible to be used in leak testing, evacuation and refrigerant gas charge.
- Select from three standard types of seal materials to be used with fluids for air conditioner and refrigerator production lines. Many models to suit various pipe sizes.
- One lever operation simultaneously clamps and seals pipe. Double seal construction for tight fit on end and outside surface of pipe ensures excellent sealing and vacuum resistance.



Wide variations of end configurations; 1/4", 3/8" and blind plug

Standard seal materials fluoro rubber (FKM), hydrogenated nitrile rubber (HNBR) and chloroprene rubber (CR) to suit air conditioner and refrigerator production lines

Double seal design for tight fit on both end and outside of pipe

Many models to cover various pipe sizes

One lever operation simultaneously clamps and seals pipe

For exclusive use on straight copper pipes

| Specifications   |                           |                             |             |                 |                           |                   |              |         |              |               |         |                   |
|------------------|---------------------------|-----------------------------|-------------|-----------------|---------------------------|-------------------|--------------|---------|--------------|---------------|---------|-------------------|
| Model            | PCV400                    | PCV470                      | PCV500      | PCV600          | PCV630                    | PCV800            | PCV950       | PCV1000 | PCV1270      | PCV1590       |         |                   |
| Copper pipe OD   | ø4.0                      | ø4.76 (3/16")               | ø5.0        | ø6.0            | ø6.35 (1/4")              | ø8.0 (5/16")      | ø9.52 (3/8") | ø10.0   | ø12.7 (1/2") | ø15.88 (5/8") |         |                   |
| Body material    | Brass                     |                             |             |                 |                           |                   |              |         |              |               |         |                   |
| Working pressure | MPa                       | 4.5                         |             |                 |                           |                   |              |         |              |               |         |                   |
|                  | kgf/cm <sup>2</sup>       | 46                          |             |                 |                           |                   |              |         |              |               |         |                   |
|                  | bar                       | 45                          |             |                 |                           |                   |              |         |              |               |         |                   |
|                  | PSI                       | 653                         |             |                 |                           |                   |              |         |              |               |         |                   |
| Seal material    | Seal material             | Chloroprene rubber          | Mark        | CR (C308)       | Working temperature range | -20°C to +80°C    |              |         |              |               | Remarks | Standard material |
|                  | Working temperature range | Fluoro rubber               | FKM (X-100) | -20°C to +180°C |                           | Standard material |              |         |              |               |         |                   |
|                  |                           | Hydrogenated nitrile rubber | HNBR (H708) | -20°C to +120°C |                           | Standard material |              |         |              |               |         |                   |

\* Hydrogenated nitrile rubber (HNBR) is colored in blue for easy recognition.


| Max. Tightening Torque |        | Nm (kgf·cm) |
|------------------------|--------|-------------|
| Size (Thread)          | 1/4"   | 3/8"        |
| Torque                 | 9 (92) | 12 (122)    |

**Flow Direction**

Fluid may flow in either direction from plug or from socket side when coupled.



| Min. Cross-Sectional Area (mm <sup>2</sup> ) |        |         |           |           |           |           |
|--|--------|---------|-----------|-----------|-----------|-----------|
| Model  | PCV400 | PCV470  | PCV500    | PCV600    | PCV630    | PCV800    |
| Min. cross-sectional area                    | 3.8    | 3.8     | 3.8       | 9.1       | 9.1       | 16.6      |
| Model  | PCV950 | PCV1000 | PCV1270-2 | PCV1270-3 | PCV1590-2 | PCV1590-3 |
| Min. cross-sectional area                    | 16.6   | 16.6    | 50.3      | 73.9      | 50.3      | 78.5      |

| Suitability for Vacuum |             | 1.3 x 10 <sup>-1</sup> Pa {1 x 10 <sup>-3</sup> mmHg} |
|------------------------|-------------|---|
| Cupla only             | Operational |   |
|                        | Operational |   |

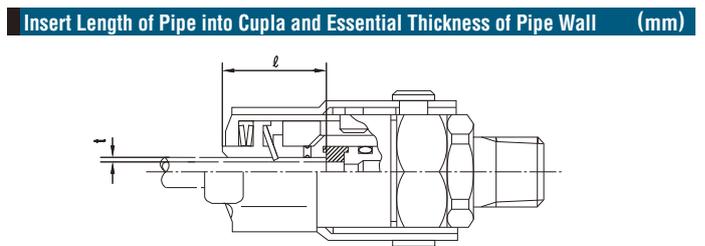

Items with asterisk (\*) are made-to-order products.


| Model    | Insert length of pipe into Cupla (l) | Essential thickness of pipe wall (t) |
|----------|--------------------------------------|--------------------------------------|
| PCV400*  | 19                                   | Minimum 0.8                          |
| PCV470   |                                      |                                      |
| PCV500*  |                                      |                                      |
| PCV600   |                                      |                                      |
| PCV630   | 20.5                                 | Minimum 1.0                          |
| PCV800   |                                      |                                      |
| PCV950   |                                      |                                      |
| PCV1000* | 30                                   | Minimum 1.0                          |
| PCV1270  |                                      |                                      |
| PCV1590  |                                      |                                      |

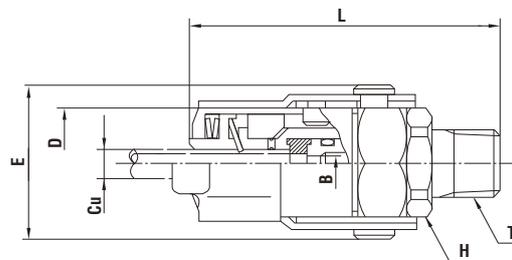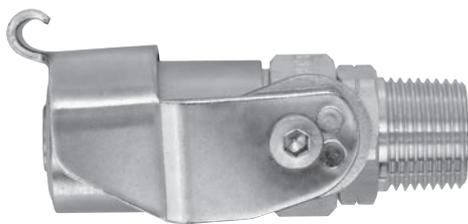


| Model    | Pipe OD (Cu)     | Model     | Size (T)   | Mass (g) | Dimensions (mm) |        |     |      |        |
|----------|------------------|-----------|------------|----------|-----------------|--------|-----|------|--------|
|          |                  |           |            |          | L               | H(WAF) | øB  | øD   | E      |
| PCV400*  | ø4.0             | PCV400-2  | R 1/4      | 155      | (59)            | Hex.17 | 2.2 | 22.2 | (32.5) |
|          |                  | PCV400-3  | R 3/8      | 155      | (60)            | Hex.19 |     |      |        |
| PCV470   | ø4.76<br>(3/16") | PCV470-2  | R 1/4      | 155      | (60)            | Hex.17 | 2.2 | 22.2 | (32.5) |
|          |                  | PCV470-3  | R 3/8      | 160      | (61)            | Hex.19 |     |      |        |
|          |                  | PCV470-0  | Blind plug | 160      | (47)            | -      | -   |      |        |
| PCV500*  | ø5.0             | PCV500-2  | R 1/4      | 155      | (59)            | Hex.17 | 2.2 | 22.2 | (32.5) |
|          |                  | PCV500-3  | R 3/8      | 155      | (60)            | Hex.19 |     |      |        |
| PCV600   | ø6.0             | PCV600-2  | R 1/4      | 150      | (60)            | Hex.17 | 3.4 | 22.2 | (32.5) |
|          |                  | PCV600-3  | R 3/8      | 155      | (61)            | Hex.19 |     |      |        |
|          |                  | PCV600-0  | Blind plug | 155      | (47)            | -      | -   |      |        |
| PCV630   | ø6.35<br>(1/4")  | PCV630-2  | R 1/4      | 145      | (60)            | Hex.17 | 3.4 | 22.2 | (32.5) |
|          |                  | PCV630-3  | R 3/8      | 150      | (61)            | Hex.19 |     |      |        |
|          |                  | PCV630-0  | Blind plug | 150      | (47)            | -      | -   |      |        |
| PCV800   | ø8.0<br>(5/16")  | PCV800-2  | R 1/4      | 175      | (62)            | Hex.17 | 4.6 | 24.8 | (35.5) |
|          |                  | PCV800-3  | R 3/8      | 180      | (63)            | Hex.19 |     |      |        |
|          |                  | PCV800-0  | Blind plug | 185      | (50)            | -      | -   |      |        |
| PCV950   | ø9.52<br>(3/8")  | PCV950-2  | R 1/4      | 175      | (62)            | Hex.17 | 4.6 | 24.8 | (35.5) |
|          |                  | PCV950-3  | R 3/8      | 180      | (63)            | Hex.19 |     |      |        |
|          |                  | PCV950-0  | Blind plug | 180      | (50)            | -      | -   |      |        |
| PCV1000* | ø10.0            | PCV1000-2 | R 1/4      | 155      | (62)            | Hex.17 | 4.6 | 24.8 | (35.5) |
|          |                  | PCV1000-3 | R 3/8      | 155      | (63)            | Hex.19 |     |      |        |
| PCV1270  | ø12.7<br>(1/2")  | PCV1270-2 | R 1/4      | 470      | (80)            | Hex.24 | 8.0 | 34.8 | (45.0) |
|          |                  | PCV1270-3 | R 3/8      | 465      | (81)            | Hex.24 |     |      |        |
|          |                  | PCV1270-0 | Blind plug | 475      | (68)            | -      | -   |      |        |
| PCV1590  | ø15.88<br>(5/8") | PCV1590-2 | R 1/4      | 424      | (80)            | Hex.24 | 8.0 | 34.8 | (45.0) |
|          |                  | PCV1590-3 | R 3/8      | 435      | (81)            | Hex.24 |     |      |        |
|          |                  | PCV1590-0 | Blind plug | 445      | (68)            | -      | -   |      |        |

• For mass with a plug, add (brass body) 2P-V : 39 g, 3P-V : 67 g, (stainless steel body) 2P-V : 34 g, or 3P-V : 59 g \* Available on request

**Clamping Mechanism**

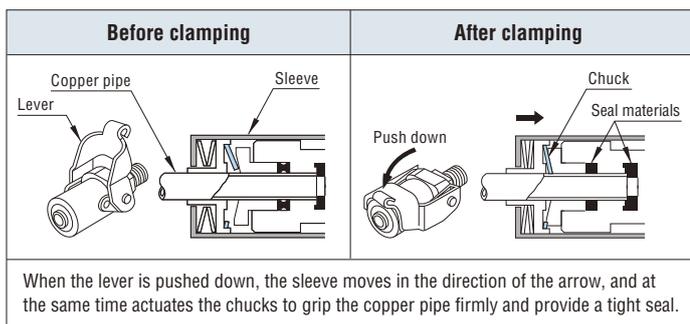

**Application Example**

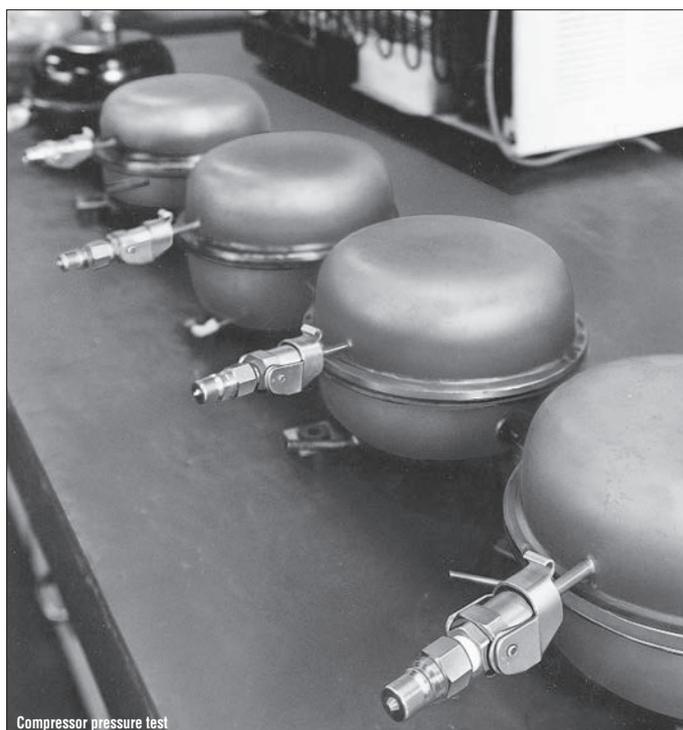


Compressor pressure test

Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.

# Semi-Standard Cupla Series

## Index

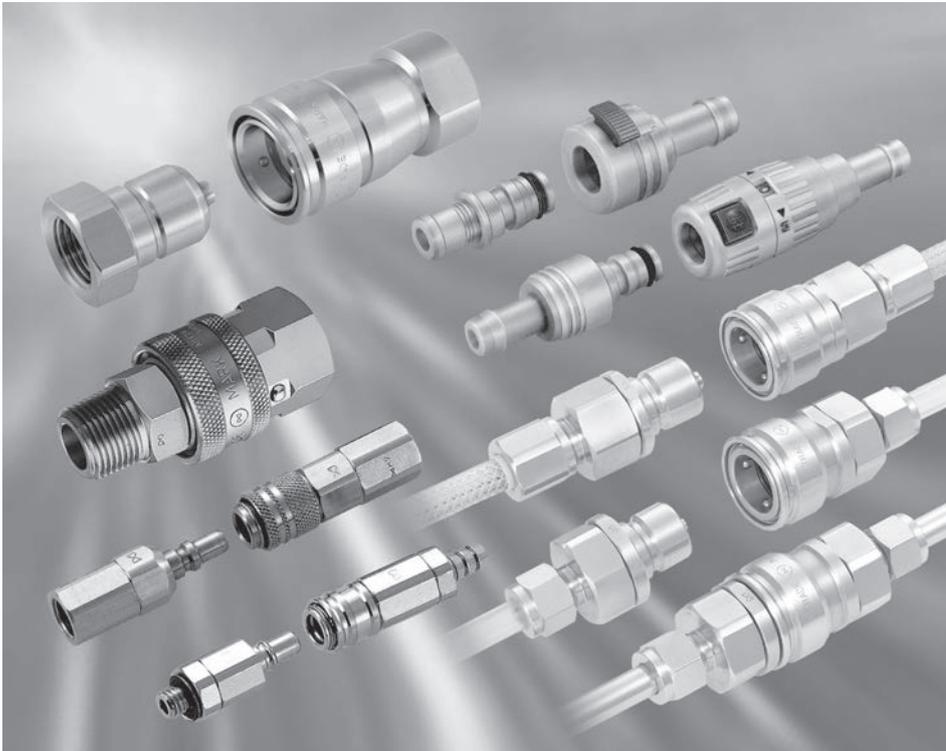

| Product Name                            | Page |
|---|------|
| <b>C</b> Cupla with Safety Lock         | 131  |
| Cupla with Single Lock                  | 131  |
| <b>H</b> High flow Cupla                | 133  |
| High flow Cupla BI                      | 134  |
| <b>P</b> Plastic Cupla BC Type          | 135  |
| Plastic Cupla BCC Type                  | 135  |
| <b>T</b> TSP-HP Cupla for High Pressure | 132  |
| Two-way Shut-off Type Small Size Cuplas | 132  |

## Cupla with Single Lock Cupla with Safety Lock

Accidental disconnection prevention mechanism


The standard Cuplas listed on the right can have an additional single lock or a safety lock mechanism to prevent accidental disconnection.

### • Cupla with Single Lock


The sleeve is provided with a cutout and the body of the socket has a projecting lock pin or ball. After connecting the Cuplas, simply turn the sleeve to lock the back and forth movement of the sleeve.

### • Cupla with Safety Lock

A sleeve stopper Lock Ring is provided below the sleeve. After connecting the Cuplas, simply turning the Lock Ring to disable the back and forth movement of the sleeve (see diagram sketch on the right top).

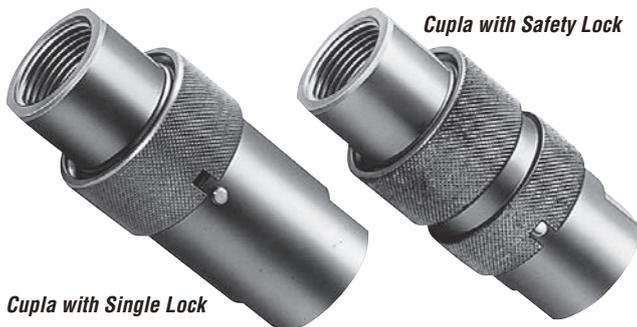

### Construction of and How to Use Safety Lock (Accidental Disconnection Prevention Mechanism)

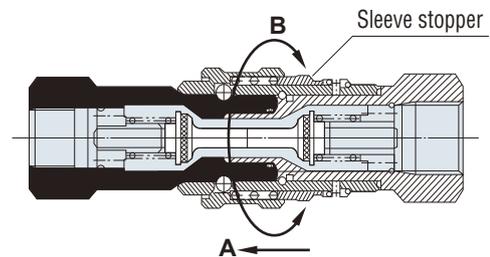

#### ● To lock the sleeve

Push the sleeve stopper toward A and turn 90° (toward B) to the left or right to engage the sleeve stopper.

#### ● To unlock the sleeve

Push the sleeve stopper toward A and turn 90° (toward B) to the left or right to disengage the sleeve stopper.

### Cuplas with Single Lock / Safety Lock

#### Cuplas with Single Lock

- Hi Cupla (Brass) / • Mold Cupla
- SP Cupla Type A / • TSP Cupla
- HSP Cupla / • 210 Cupla

\*The above all with single lock are made-to-order.

The following Cuplas come with single lock as standard feature.

- Hi Cupla BL
- Lock Cupla 200
- HSU Cupla
- 350 Cupla
- Flat Face Cupla F35
- Flat Face Cupla FF
- 450B Cupla

#### Cuplas with Safety Lock

- SP Cupla Type A
- TSP Cupla / • HSP Cupla
- 210 Cupla / • 350 Cupla

\*The above all with safety lock are made-to-order.

The following Cupla comes with safety lock as standard feature.

- S210 Cupla

# Two-way Shut-off Type Small Size Cuplas

For temperature controllers

Working pressure



1.0 MPa  
(10 kgf/cm<sup>2</sup>)



1.5 MPa  
(15 kgf/cm<sup>2</sup>)

Valve structure



Two-way shut-off

Applicable fluids



Water



Gas



Air

- Push-to-connect operation.
- Both socket and plug have built-in automatic shut-off valves to prevent fluid spill out when disconnected.
- Easy connection even in a restricted area.
- Lightweight feature will allow you easy design of multiple piping.



Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.

## Specifications

|                  |  |                 |                           |                      |
|------------------|--|-----------------|---------------------------|----------------------|
| Body material    | MYU Cupla                              | Little Cupla    |                           |                      |
|                  | Stainless steel, Brass (Nickel-plated) | Stainless steel |                           |                      |
| Size (Thread)    | Please check with us.                  |                 |                           |                      |
| Working pressure | MPa                                    | 1.0             | 1.5                       |                      |
|                  | kgf/cm <sup>2</sup>                    | 10              | 15                        |                      |
|                  | bar                                    | 10              | 15                        |                      |
|                  | PSI                                    | 145             | 218                       |                      |
| Seal material    | Seal material                          | Mark            | Working temperature range | Remarks              |
|                  | Nitrile rubber                         | NBR (SG)        | -20°C to +80°C            | Available on request |
|                  | Ethylene-propylene rubber              | EPDM (EPT)      | -40°C to +150°C           |                      |
|                  | Fluoro rubber                          | FKM (X-100)     | -20°C to +180°C           |                      |

## Two-way Shut-off Type Small Size Cupla Series

Please check with us about the end configurations and sizes.

### MYU Cupla / MYU type

Min. Cross-Sectional Area: 4.9 mm<sup>2</sup> (Ø2.5)

OD  
10 mm

Plug



Socket



### Little Cupla / MSV type

Min. Cross-Sectional Area: 6.1 mm<sup>2</sup> (Ø2.8)

OD  
14 mm

Plug



Socket



# TSP-HP Cupla for High Pressure

For high pressure and general purposes

Working pressure



9.0 MPa  
(92 kgf/cm<sup>2</sup>)

Valve structure



Straight through

Applicable fluids



Water



Hydraulic oil

- Good for high pressure water piping such as in high pressure washers, or car washers.
- Valveless type ensures high flow rate.



## Specifications


|                  |                           |            |                           |                      |
|------------------|---------------------------|------------|---------------------------|----------------------|
| Body material    | Stainless steel           |            |                           |                      |
| Size (Thread)    | 1/4", 3/8", 1/2"          |            |                           |                      |
| Working pressure | MPa                       | 9.0        |                           |                      |
|                  | kgf/cm <sup>2</sup>       | 92         |                           |                      |
|                  | bar                       | 90         |                           |                      |
|                  | PSI                       | 1310       |                           |                      |
| Seal material    | Seal material             | Mark       | Working temperature range | Remarks              |
|                  | Nitrile rubber            | NBR (SG)   | -20°C to +80°C            | Available on request |
|                  | Ethylene-propylene rubber | EPDM (EPT) | -40°C to +150°C           |                      |

Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.

## Models and Dimensions


WAF : WAF stands for width across flats.

### Plug TPF type (Female thread)




| Model   | Application | Dimensions (mm) |        |      |        |     |
|---------|-------------|-----------------|--------|------|--------|-----|
|         |             | L               | H(WAF) | C    | T      | øB  |
| 2TPF-HP | R 1/4       | 34              | Hex.17 | 18   | Rc 1/4 | 6.5 |
| 3TPF-HP | R 3/8       | 38              | Hex.21 | 21   | Rc 3/8 | 10  |
| 4TPF-HP | R 1/2       | 47.5            | Hex.29 | 26.5 | Rc 1/2 | 13  |

### Socket TSF type (Female thread)



| Model   | Application | Dimensions (mm) |    |        |        |
|---------|-------------|-----------------|----|--------|--------|
|         |             | L               | øD | H(WAF) | T      |
| 2TSF-HP | R 1/4       | 32              | 24 | Hex.19 | Rc 1/4 |
| 3TSF-HP | R 3/8       | 35              | 28 | Hex.23 | Rc 3/8 |
| 4TSF-HP | R 1/2       | 44.5            | 35 | Hex.29 | Rc 1/2 |

### Plug TPM type (Male thread)



| Model   | Application | Dimensions (mm) |        |    |       |     |
|---------|-------------|-----------------|--------|----|-------|-----|
|         |             | L               | H(WAF) | C  | T     | øB  |
| 2TPM-HP | Rc 1/4      | 38              | Hex.17 | 18 | R 1/4 | 6.5 |
| 3TPM-HP | Rc 3/8      | 43              | Hex.19 | 21 | R 3/8 | 10  |

## ⚠ Precautions for use

### ⚠ Warning

Do not connect with standard TSP Cupla (Page 71 to 74).

# High Flow Cupla

For Medium Pressure

Working pressure



1.0 MPa  
(10 kgf/cm<sup>2</sup>)

Valve structure



Two-way shut-off

Applicable fluids




Water

Cooling water


## Drastically increases flow volume while minimising pressure drop.

- Both socket and plug have built-in automatic shut-off valves.
- High flow rate type to increase cooling effect.
- Quick connection and disconnection of cooling pipes.
- Compact and space-saving design. Compared with the coupled length of SP Cupla type A, that of High Flow Cupla is reduced by 22%.
- Installation and maintenance can be done within a short time.

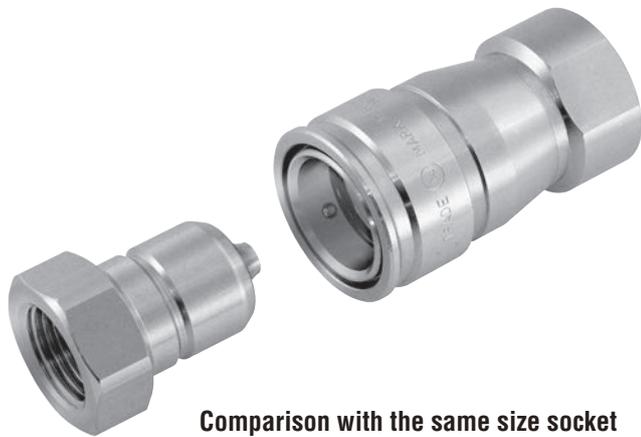

Comparison with the same size socket

*Reduced*

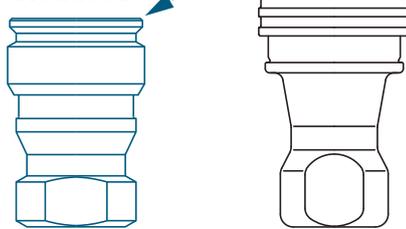

High Flow Cupla  
HFL-4S

SP Cupla Type A  
4S-A

### Specifications

|                           |                           |      |                           |
|---------------------------|---------------------------|------|---------------------------|
| Body material             | Stainless steel, Brass    |      |                           |
| Size (Thread)             | 1/4", 3/8", 1/2"          |      |                           |
| Working pressure          | MPa                       | 1.0  |                           |
|                           | kgf/cm <sup>2</sup>       | 10   |                           |
|                           | bar                       | 10   |                           |
|                           | PSI                       | 145  |                           |
| Seal material             | Seal material             | Mark | Working temperature range |
| Working temperature range | Ethylene-propylene rubber | EPDM | -40°C to +150°C           |
|                           | Fluoro rubber             | FKM  | -20°C to +180°C           |

\* Standard seal material is fluoro rubber for brass body.

### Max. Tightening Torque

Nm {kgf-cm}

| Model  | HFL-2P / HFL-2S | HFL-3P / HFL-3S | HFL-4P / HFL-4S |          |
|--------|-----------------|-----------------|-----------------|----------|
| Torque | Stainless steel | 14 {143}        | 22 {224}        | 60 {612} |
|        | Brass           | 9 {92}          | 12 {122}        | 30 {306} |

### Flow Direction

Fluid may flow in either direction from plug or from socket side when coupled.



### Interchangeability

Different sized sockets and plugs cannot be connected to each other.

### Min. Cross-Sectional Area

(mm<sup>2</sup>)

| Model                     | HFL-2P / HFL-2S | HFL-3P / HFL-3S | HFL-4P / HFL-4S |
|---------------------------|-----------------|-----------------|-----------------|
| Min. Cross-Sectional Area | 32              | 53              | 91              |


### Suitability for Vacuum

$1.3 \times 10^{-1}$  Pa ( $1 \times 10^{-3}$  mmHg)

| Socket only | Plug only | When connected |
|-------------|-----------|----------------|
| —           | —         | Operational    |

### Flow Rate – Pressure Loss Characteristics


[Test conditions] • Fluid : Water • Temperature : 20°C ± 5°C

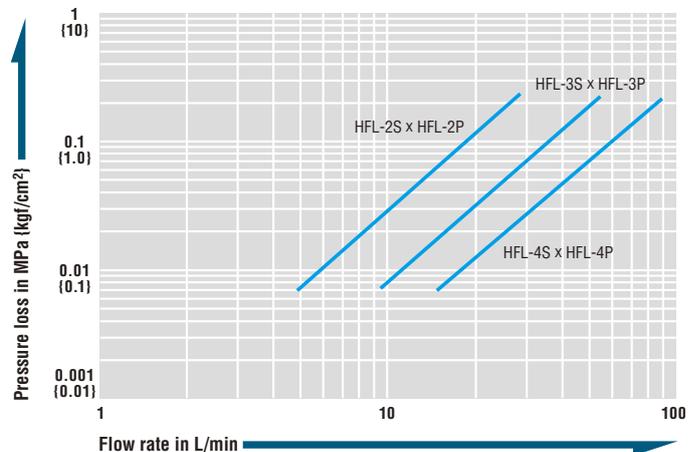

### Models and Dimensions

WAF : WAF stands for width across flats.


#### Plug Female thread

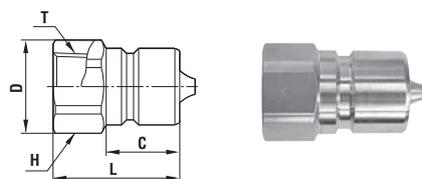

| Model  | Application | Mass (g) |                 | Dimensions (mm) |      |      |        |        |
|--------|-------------|----------|-----------------|-----------------|------|------|--------|--------|
|        |             | Brass    | Stainless steel | L               | C    | øD   | H(WAF) | T      |
| HFL-2P | R 1/4       | 31       | 28              | 30              | 16.5 | 18.5 | Hex.17 | Rc 1/4 |
| HFL-3P | R 3/8       | 47       | 43              | 31              | 18   | 23   | Hex.21 | Rc 3/8 |
| HFL-4P | R 1/2       | 91       | 82              | 37.5            | 22.5 | 32   | Hex.29 | Rc 1/2 |

Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.

#### Socket Female thread

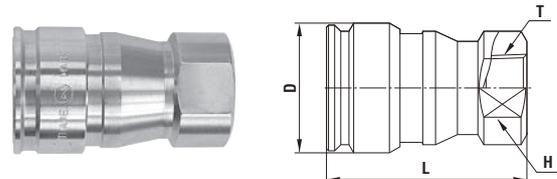

| Model  | Application | Mass (g) |                 | Dimensions (mm) |    |        |        |
|--------|-------------|----------|-----------------|-----------------|----|--------|--------|
|        |             | Brass    | Stainless steel | L               | øD | H(WAF) | T      |
| HFL-2S | R 1/4       | 110      | 99              | (47)            | 26 | 19     | Rc 1/4 |
| HFL-3S | R 3/8       | 165      | 150             | (49)            | 32 | 24     | Rc 3/8 |
| HFL-4S | R 1/2       | 231      | 211             | 60              | 35 | 29     | Rc 1/2 |

# High Flow Cupla BI Type

Cupla with ferrule flange for piping of water and fluids for temperature control

Working pressure  
**1.0**  
1.0 MPa  
(10 kgf/cm<sup>2</sup>)

Valve structure  
**Two-way shut-off**

Applicable fluids  
**Water**  
**Cooling water**

## High flow Cupla and ferrule flange are combined to achieve efficient piping.

- Easy connection with stainless steel pipe.
- Connection to plastic hose is possible with optional hose connection kit.
- Connection to various tubes is also possible via the use of appropriate optional inserts.



### Specifications

|                           |   |      |                           |                    |
|---------------------------|---|------|---------------------------|--------------------|
| Body material             | Stainless steel   |      |                           |                    |
| Applicable pipe size      | 1/4", 3/8", 1/2" (See the below list for hose and tube size.) |      |                           |                    |
| Working pressure          | MPa   | 1.0  |                           |                    |
|                           | kgf/cm <sup>2</sup>   | 10   |                           |                    |
|                           | bar   | 10   |                           |                    |
|                           | PSI   | 145  |                           |                    |
| Seal material             | Seal material   | Mark | Working temperature range | Remarks            |
| Working temperature range | Ethylene-propylene rubber                                     | EPDM | -40°C to +150°C           | Standard material  |
|                           | Fluoro rubber   | FKM  | -20°C to +180°C           | Made-to-order item |

### Flow Direction

Fluid may flow in either direction from plug or from socket side when coupled.



### Interchangeability

Different sizes are not connectable.


### Suitability for Vacuum

$1.3 \times 10^{-1}$  Pa ( $1 \times 10^{-3}$  mmHg)

| Socket only | Plug only | When connected |
|-------------|-----------|----------------|
| —           | —         | Operational    |

### Flow Rate – Pressure Loss Characteristics (When connected to stainless steel pipe)

[Test conditions] • Fluid : Water • Temperature: 20°C ± 5°C

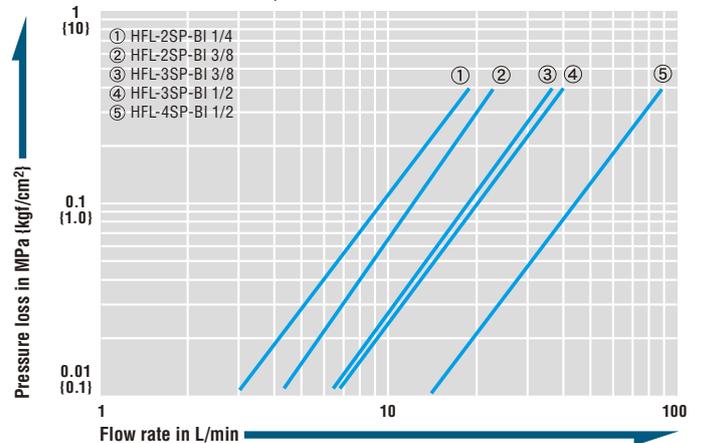

### Stainless steel pipe, hose, and tube size


| Model          | Stainless steel pipe |             | Hose connection nut (Optional) |                | Tube connection insert (Optional) |        |                   |        |      |  |
|----------------|----------------------|-------------|--------------------------------|----------------|-----------------------------------|--------|-------------------|--------|------|--|
|                | Pipe dia. Inch (mm)  | Model       | Hose size (ID x OD)            | Type of insert | Tube dimensions (ID x OD)         |        | Insert dimensions |        |      |  |
|                |                      |             |                                |                | E (mm)                            | L (mm) | A (mm)            | D (mm) |      |  |
| HFL-2SP-BI 1/4 | 1/4 (ø6.35)          | —           | —                              | DTI 4-2        | ø3.18 x ø6.35                     | 2.3    | 11.9              | 6.35   | 3.18 |  |
|                |                      | —           | —                              | DTI 4-2.5      | ø3.97 x ø6.35                     | 2.7    | 11.9              | 6.35   | 3.97 |  |
|                |                      | —           | —                              | DTI 4-2.75     | ø4.32 x ø6.35                     | 2.7    | 11.9              | 6.35   | 4.32 |  |
| HFL-2SP-BI 3/8 | 3/8 (ø9.53)          | —           | —                              | DTI 4-3        | ø4.76 x ø6.35                     | 3.5    | 11.9              | 6.35   | 4.76 |  |
|                |                      | —           | —                              | DTI 6-3        | ø4.76 x ø9.53                     | 3.0    | 14.3              | 9.53   | 4.76 |  |
|                |                      | —           | —                              | DTI 6-4        | ø6.35 x ø9.53                     | 4.8    | 14.3              | 9.53   | 6.35 |  |
| HFL-3SP-BI 3/8 | 3/8 (ø9.53)          | —           | —                              | DTI 6-3        | ø4.76 x ø9.53                     | 3.0    | 14.3              | 9.53   | 4.76 |  |
|                |                      | —           | —                              | DTI 6-4        | ø6.35 x ø9.53                     | 4.8    | 14.3              | 9.53   | 6.35 |  |
|                |                      | —           | —                              | DTI 8-4        | ø6.35 x ø12.7                     | 4.8    | 19.1              | 12.7   | 6.35 |  |
| HFL-3SP-BI 1/2 | 1/2 (ø12.7)          | E1-8 x 11   | ø6 x ø11                       | DTI 8-4        | ø6.35 x ø12.7                     | 4.8    | 19.1              | 12.7   | 6.35 |  |
|                |                      | E1-8 x 13.5 | ø8 x ø13.5                     | DTI 8-6        | ø9.53 x ø12.7                     | 7.9    | 19.1              | 12.7   | 9.53 |  |
|                |                      | E1-8 x 11   | ø6 x ø11                       | DTI 8-4        | ø6.35 x ø12.7                     | 4.8    | 19.1              | 12.7   | 6.35 |  |
| HFL-4SP-BI 1/2 | 1/2 (ø12.7)          | E1-8 x 13.5 | ø8 x ø13.5                     | DTI 8-6        | ø9.53 x ø12.7                     | 7.9    | 19.1              | 12.7   | 9.53 |  |
|                |                      | E1-8 x 11   | ø6 x ø11                       | DTI 8-4        | ø6.35 x ø12.7                     | 4.8    | 19.1              | 12.7   | 6.35 |  |

Note: The material of tube to be applied must be any of nylon, polyester, polypropylene, or Teflon. The nut for stainless steel pipe comes with standard High Flow Cupla. When a hose or tube is connected to the Cupla, an optional hose connection nut or tube connection insert is required.

### Models and Dimensions

WAF : WAF stands for width across flats.


#### Plug For pipe connection

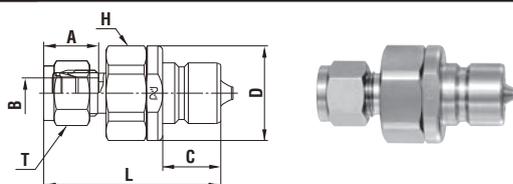

| Model         | Application (Pipe size) (mm) | Mass (g)   | Dimensions (mm) |             |                     |                    |    |        |        |
|---------------|------------------------------|------------|-----------------|-------------|---------------------|--------------------|----|--------|--------|
|               |                              |            | L               | C           | A                   | øD                 | øB | H(WAF) | T(WAF) |
| HFL-2P-BI 1/4 | 6.35 (1/4")                  | 66 (51.9)  | 16.5 (15.4)     | 23 (6.35)   | Hex.20.64 (13/16")  | Hex.14.29 (9/16")  |    |        |        |
| HFL-2P-BI 3/8 | 9.53 (3/8")                  | 74 (53.4)  | 16.5 (17)       | 23 (9.53)   | Hex.20.64 (13/16")  | Hex.17.46 (11/16") |    |        |        |
| HFL-3P-BI 3/8 | 9.53 (3/8")                  | 109 (54.8) | 18 (17)         | 29.5 (9.53) | Hex.26.99 (1 1/16") | Hex.17.46 (11/16") |    |        |        |
| HFL-3P-BI 1/2 | 12.7 (1/2")                  | 134 (59)   | 18 (23)         | 29.5 (12.7) | Hex.26.99 (1 1/16") | Hex.22.23 (7/8")   |    |        |        |
| HFL-4P-BI 1/2 | 12.7 (1/2")                  | 160 (68.7) | 22.5 (23)       | 32 (12.7)   | Hex.28.58 (1 1/8")  | Hex.22.23 (7/8")   |    |        |        |

Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.

#### Socket For pipe connection

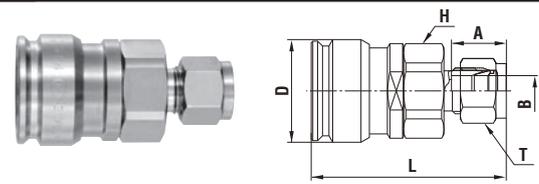

| Model         | Application (Pipe size) (mm) | Mass (g)   | Dimensions (mm) |           |                     |                    |        |        |  |
|---------------|------------------------------|------------|-----------------|-----------|---------------------|--------------------|--------|--------|--|
|               |                              |            | L               | A         | øD                  | øB                 | H(WAF) | T(WAF) |  |
| HFL-2S-BI 1/4 | 6.35 (1/4")                  | 97 (54.9)  | (15.4)          | 26 (6.35) | Hex.20.64 (13/16")  | Hex.14.29 (9/16")  |        |        |  |
| HFL-2S-BI 3/8 | 9.53 (3/8")                  | 105 (56.5) | (17)            | 26 (9.53) | Hex.20.64 (13/16")  | Hex.17.46 (11/16") |        |        |  |
| HFL-3S-BI 3/8 | 9.53 (3/8")                  | 165 (60.3) | (17)            | 32 (9.53) | Hex.26.99 (1 1/16") | Hex.17.46 (11/16") |        |        |  |
| HFL-3S-BI 1/2 | 12.7 (1/2")                  | 189 (64.6) | (23)            | 32 (12.7) | Hex.26.99 (1 1/16") | Hex.22.23 (7/8")   |        |        |  |
| HFL-4S-BI 1/2 | 12.7 (1/2")                  | 233 (73.2) | (23)            | 35 (12.7) | Hex.28.58 (1 1/8")  | Hex.22.23 (7/8")   |        |        |  |

# Plastic Cupla BC Type Valveless

For low pressure air piping

Working pressure  
**0.07**  
0.07 MPa  
(0.7 kgf/cm<sup>2</sup>)

Valve structure  
Straight through

Applicable fluid  
Air

- To connect, just push the plug into the socket.
- Plastic makes this ideal for use in environment prone to rusting.
- Compact and light weight for easy handling.
- Valveless construction gives more stable flow.



Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.

# Plastic Cupla BCC Type with Flow Controller

For low pressure air piping

Working pressure  
**0.07**  
0.07 MPa  
(0.7 kgf/cm<sup>2</sup>)

Valve structure  
One-way shut-off

Applicable fluid  
Air

- To connect, just push the plug into the socket.
- Plug with built-in automatic shut-off valve.
- Socket with handy flow controller.
- Plastic makes this ideal for use in environments prone to rusting.
- Compact and light weight for excellent handling.



Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.


## Specifications

|                           |                     |      |          |   |
|---------------------------|---------------------|------|----------|---|
| Body material             | Plastic             |      |          |   |
| Size                      | 1/4", 3/8" hose     |      |          |   |
| Working pressure          | MPa                 | 0.07 |          |   |
|                           | kgf/cm <sup>2</sup> | 0.7  |          |   |
|                           | bar                 | 0.7  |          |   |
|                           | PSI                 | 10.2 |          |   |
| Seal material             | Nitrile rubber      | Mark | NBR (SG) | Working temperature range<br>-20°C to +50°C |
| Working temperature range | Standard material   |      |          |   |

## Models and Dimensions


WAF : WAF stands for width across flats.

### Plug PH type (Hose barb)

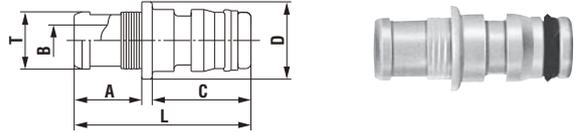

| Model  | Application (Hose) | Mass (g) | Dimensions (mm) |    |    |    |      |    |
|--------|--------------------|----------|-----------------|----|----|----|------|----|
|        |                    |          | L               | C  | A  | φB | φT   | φD |
| BC-2PH | 1/4"               | 1.8      | 41              | 19 | 17 | 4  | 8.5  | 14 |
| BC-3PH | 3/8"               | 2        | 34              | 19 | 13 | 6  | 10.9 | 15 |

### Socket SH type (Hose barb)

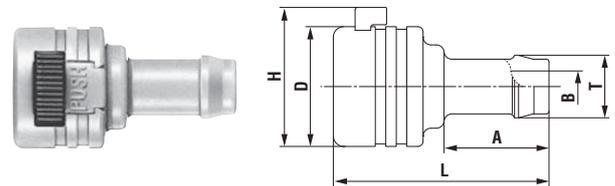

| Model  | Application (Hose) | Mass (g) | Dimensions (mm) |    |    |     |    |        |
|--------|--------------------|----------|-----------------|----|----|-----|----|--------|
|        |                    |          | L               | A  | φB | φT  | φD | H      |
| BC-2SH | 1/4"               | 5.6      | 38              | 17 | 4  | 8.5 | 23 | (26.5) |
| BC-3SH | 3/8"               | 6        | 41              | 20 | 6  | 12  | 23 | (26.5) |


## Specifications

|                           |                     |      |          |   |
|---------------------------|---------------------|------|----------|---|
| Body material             | Plastic             |      |          |   |
| Size                      | 3/8" hose           |      |          |   |
| Working pressure          | MPa                 | 0.07 |          |   |
|                           | kgf/cm <sup>2</sup> | 0.7  |          |   |
|                           | bar                 | 0.7  |          |   |
|                           | PSI                 | 10.2 |          |   |
| Seal material             | Nitrile rubber      | Mark | NBR (SG) | Working temperature range<br>-20°C to +50°C |
| Working temperature range | Standard material   |      |          |   |

## Models and Dimensions


WAF : WAF stands for width across flats.

### Plug PH type (Hose barb)

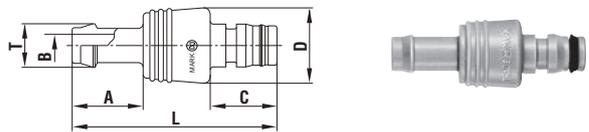

| Model   | Application (Hose) | Mass (g) | Dimensions (mm) |    |    |    |    |    |
|---------|--------------------|----------|-----------------|----|----|----|----|----|
|         |                    |          | L               | C  | A  | φD | φT | φB |
| BCV-3PH | 3/8"               | 10       | (58)            | 19 | 20 | 21 | 12 | 6  |

### Socket SH type (Hose barb)

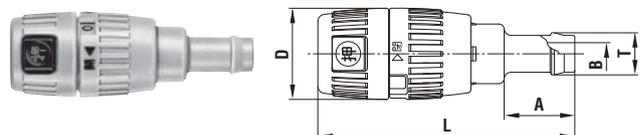

| Model   | Application (Hose) | Mass (g) | Dimensions (mm) |    |    |    |    |
|---------|--------------------|----------|-----------------|----|----|----|----|
|         |                    |          | L               | φD | A  | φT | φB |
| BCC-3SH | 3/8"               | 25       | (73)            | 26 | 20 | 12 | 6  |

# Accessories for Cuplas

## Dip Mold Cap

Dust caps for Hi Cupla, SP Cupla Type A, TSP Cupla, and Hydraulic Cupla



- PVC Dust Caps produced by dip molding are available for Hi Cuplas, SP Cuplas Type A, TSP Cuplas, and Hydraulic Cuplas. Dust Caps prevent dust from getting inside the fluid line and protects the sealability and life of the O-ring.

| Part number | Cap for Hi Cupla | Sales unit     | Part number | Cap for SP Cupla Type A | Sales unit | Part number | Cap for TSP Cupla | Sales unit | Part number | Cap for HSP Cupla | Sales unit |         |         |          |          |
|-------------|------------------|----------------|-------------|-------------------------|------------|-------------|-------------------|------------|-------------|-------------------|------------|---------|---------|----------|----------|
| Socket      | CA96462          | For 20 type    | 1           | Socket                  | CA96462    | For 1S-A    | 1                 | Socket     | CA96542     | For 1TS           | 1          |         |         |          |          |
|             |                  | For 30 type    | 1           |                         | CA96463    | For 2S-A    | 1                 |            | CA96463     | For 2TS           | 1          | Socket  | CA96463 | For 2HS  | 1        |
|             |                  | For 40 type    | 1           |                         | CA96464    | For 3S-A    | 1                 |            | CA96463     | For 3TS           | 1          |         | CA96477 | For 4HS  | 1        |
|             | CA96464          | For 400 type   | 1           |                         | CA96465    | For 4S-A    | 1                 |            | CA96464     | For 4TS           | 1          |         | CA96477 | For 6HS  | 1        |
|             |                  | For 600 type   | 1           |                         | CA96466    | For 6S-A    | 1                 |            | CA96465     | For 6TS           | 1          |         | CA96478 | For 66HS | 1        |
|             |                  | For 800 type   | 1           |                         | CA96467    | For 8S-A    | 1                 |            | CA96479     | For 8TS           | 1          |         | CA96479 | For 8HS  | 1        |
| Plug        | CA96453          | For 20 type    | 1           | Plug                    | CA96468    | For 10S-A   | 1                 | Plug       | CA96553     | For 10TS          | 1          |         | Plug    | CA96481  | For 10HS |
|             |                  | For 30 type    | 1           |                         | CA96449    | For 12S-A   | 1                 |            | CA96555     | For 12TS          | 1          | CA96481 |         | For 12HS | 1        |
|             |                  | For 40 type    | 1           |                         | CA96470    | For 16S-A   | 1                 |            | CA96557     | For 16TS          | 1          | CA96482 |         | For 16HS | 1        |
|             | CA96455          | For 400 type   | 1           |                         | CA96453    | For 1P-A    | 1                 |            | CA96541     | For 1TP           | 1          | CA96454 |         | For 2HP  | 1        |
|             |                  | For 600 type   | 1           |                         | CA96454    | For 2P-A    | 1                 |            | CA96453     | For 2TP           | 1          | CA96455 |         | For 3HP  | 1        |
|             |                  | For 800 type   | 1           |                         | CA96455    | For 3P-A    | 1                 |            | CA96454     | For 3TP           | 1          | CA96456 |         | For 4HP  | 1        |
| Socket      | CB00614          | For 700R Cupla | Sales unit  | Plug                    | CA96456    | For 4P-A    | 1                 | Plug       | CA96455     | For 4TP           | 1          | Plug    | CA96456 | For 6HP  | 1        |
|             |                  |                |             |                         | CA82644    | For 700R-4S | 1                 |            | CA96456     | For 6TP           | 1          |         | CA96471 | For 66HP | 1        |
|             |                  |                |             |                         | CA83164    | For 700R-3P | 1                 |            | CA96457     | For 6P-A          | 1          |         | CA96551 | For 8TP  | 1        |
|             | CA82643          | For 700R-4P    | 1           |                         | CA96458    | For 8P-A    | 1                 |            | CA96552     | For 10TP          | 1          |         | CA96473 | For 10HP | 1        |
|             |                  |                |             |                         | CA96459    | For 10P-A   | 1                 |            | CA96459     | For 12P-A         | 1          |         | CA96473 | For 12HP | 1        |
|             |                  |                |             |                         | CA96460    | For 12P-A   | 1                 |            | CA96556     | For 16TP          | 1          |         | CA96475 | For 16HP | 1        |
| CA96461     | For 16P-A        | 1              |             |                         |            |             |                   |            |             |                   |            |         |         |          |          |


| Part number | Cap for 210 Cupla | Sales unit | Part number | Cap for 280 Cupla | Sales unit | Part number | Cap for F35/350 Cupla | Sales unit | Part number | Cap for Zerospill Cupla | Sales unit |         |         |            |            |
|-------------|-------------------|------------|-------------|-------------------|------------|-------------|-----------------------|------------|-------------|-------------------------|------------|---------|---------|------------|------------|
| Socket      | CA96463           | For 210-2S | 1           | Socket            | CB17082    | For 280-2S  | 1                     | Socket     | CB28313     | For F35-2S              | 1          |         |         |            |            |
|             | CA96476           | For 210-3S | 1           |                   | CA96476    | For 280-3S  | 1                     |            | CA81551     | For F35/350-3S          | 1          | Socket  | CA96463 | For ZEL-2S | 1          |
|             | CA81555           | For 210-4S | 1           |                   | CA81555    | For 280-4S  | 1                     |            | CA81555     | For F35/350-4S          | 1          |         | CA96464 | For ZEL-3S | 1          |
|             | CA96478           | For 210-6S | 1           |                   | CA96478    | For 280-6S  | 1                     |            | CA97213     | For F35/350-6S          | 1          |         | CB28786 | For ZEL-4S | 1          |
|             | CA96466           | For 210-8S | 1           |                   | CA96466    | For 280-8S  | 1                     |            | CA80401     | For F35/350-8S          | 1          |         | CA96466 | For ZEL-6S | 1          |
| Plug        | CA96454           | For 210-2P | 1           | Plug              | CA96453    | For 280-2P  | 1                     | Plug       | CA96454     | For F35-2P              | 1          |         | Plug    | CA96467    | For ZEL-8S |
|             | CA96455           | For 210-3P | 1           |                   | CA96455    | For 280-3P  | 1                     |            | CA81553     | For F35/350-3P          | 1          | CA96454 |         | For ZEL-2P | 1          |
|             | CA82643           | For 210-4P | 1           |                   | CA82643    | For 280-4P  | 1                     |            | CA81557     | For F35/350-4P          | 1          | CB28790 |         | For ZEL-3P | 1          |
|             | CA96471           | For 210-6P | 1           |                   | CA96471    | For 280-6P  | 1                     |            | CA97215     | For F35/350-6P          | 1          | CA96456 |         | For ZEL-4P | 1          |
|             | CA96551           | For 210-8P | 1           |                   | CA96551    | For 280-8P  | 1                     |            | CA80402     | For F35/350-8P          | 1          | CA96457 |         | For ZEL-6P | 1          |

## Safety Cap

Metal caps for Hi Cupla Series, SP Cupla Type A, TSP Cupla and Hydraulic Cupla

(Semi-standard)

- Metal Cap equipped with dust-proof and leak prevention function.
- Caps with metal material corresponding to that of Cupla body are available.

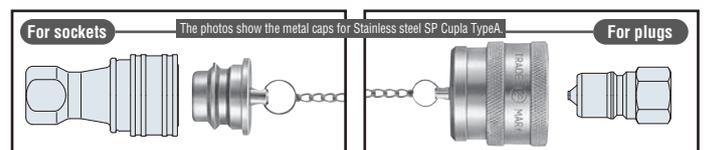

| Model   | Applicable Cuplas  | Sales unit   |
|---|--|--|
| Model name of Safety Cap is stated in the following manner.<br><b>Model= Cupla Model (normal Cupla) + SD (safety cap)</b> | Example: "2S-A-SD" identifies a safety cap for SP Cupla Type A Model 2S-A. | Sockets and plugs for Hi Cupla, SP Cupla Type A, TSP Cupla, HSP Cupla, 210 Cupla, S210 Cupla, 350 Cupla, 450B Cupla and SP-V Cupla |
|   |  | 1 pc.  |

# Sleeve Cover

Plastic cover for Hi Cupla Series (5 pcs.per package)

- Easier sliding operation is achieved by attaching an additional plastic cover over the socket sleeve of Hi Cupla Series.
- Plastic covers reduce the risk of damage if the Cupla strikes other components or products.
- Sleeve covers in various colors allow for easier identification of various air lines.



The sleeve cover cannot be used together with the dust cap or dip mold cap.


Sleeve Cover is attached

| Part number | Model    | Color  | Applicable Cuplas  | Sales unit | Material                      |
|-------------|----------|--------|--|------------|-------------------------------|
| CB23588     | SLC-HI-R | Red    | For Hi Cupla Series Sockets<br><br>Note: Sleeve covers cannot be attached to sockets for the Full-Blow Cupla, 400/600/800 Hi Cupla, Hi Cupla Ace, Stainless Hi Cupla and Brass Hi Cupla. | 5          | Thermoplastic elastomer (TPE) |
| CB23590     | SLC-HI-B | Blue   |  | 5          |                               |
| CB23589     | SLC-HI-Y | Yellow |  | 5          |                               |
| CB23591     | SLC-HI-W | White  |  | 5          |                               |
| CB23587     | SLC-HI-K | Black  |  | 5          |                               |

# Protection Cover

Plastic Cover for Nut Cupla and Full-Blow Cupla Nut Type (Semitransparent)

- For Nut Cupla and Full-Blow Cupla Nut Type.
- Protection cover wraps up the whole Cupla to absorb impacts and to reduce the risk of damage if the Cupla accidentally strikes other components or products.
- Protection covers can be cut to fit the hose diameter which the Cupla is connected to.
- Can be attached to either the socket or the plug, and can be used as a dust cap.

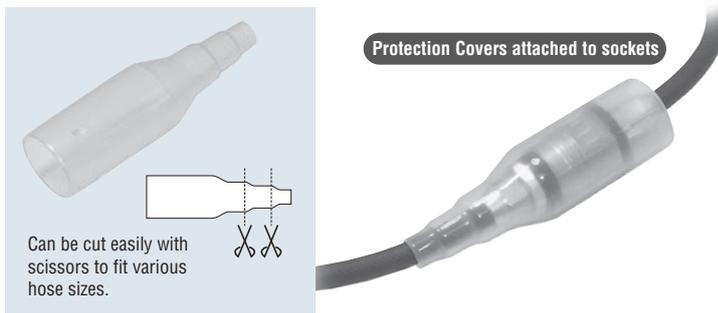

Protection Covers attached to sockets

Can be cut easily with scissors to fit various hose sizes.

| Part number | Model  | Applicable Cuplas   | Sales unit | Material                 |
|-------------|--------|---|------------|--------------------------|
| CB23784     | SOC-HI | Can be attached to Nut Cupla socket or plug (SN type & PN type) and the Full-Blow Cupla socket (SN Type). | 1          | Polyvinyl chloride (PVC) |

# Dust Cap

Plastic Cap for Hi Cupla Series

- Dust caps prevent dust from getting inside Cuplas.



For sockets

See page 136 for the details of Dip Mold Cap and Safety Cap for Hi Cupla.

| Part number | Model | Applicable Cuplas  | Sales unit | Material                 |
|-------------|-------|--|------------|--------------------------|
| CQ12434     | 20S-D | Sockets for 20/30/40 type Hi Cupla Series<br><br>Note: Dust caps cannot be attached to the sockets for Full-Blow Cupla, 400/600/800 type of Hi Cupla and Hi Cupla Ace. | 1          | Polyvinyl chloride (PVC) |

# Accessories for Air Lines

Air Lines for Hi Cupla Series

- Connects directly to 20/30/40 type Hi Cupla sockets.
- Convenient to control drainage and pressure in air lines.



Drain Cock

Pressure Gauge

| Part number | Model   | Cuplas that accessories can be mounted on | Sales unit | Description    |
|-------------|---------|---|------------|----------------|
| CB23625     | DC-30PF | Hi Cupla sockets                          | 1          | Drain Cock     |
| CB11253     | PG-10P  | Hi Cupla sockets                          | 1          | Pressure Gauge |

# Sleeve Stopper

Sleeve Stopper for SP Cupla Type A

- Sleeve stopper exclusively for SP Cupla Type A sockets. Attaching the sleeve stopper after connection of socket and plug locks the sleeve of the socket and prevents unexpected disconnection.



Attached to SP Cupla Type A

- Plastic for up to 8S-A
- Stainless steel for 10S-A to 16S-A

|        | Part number | Stopper for SP Cupla type A socket | Applicable Cuplas       | Sales unit | Material                   |        | Part number | Stopper for SP Cupla type A socket | Applicable Cuplas       | Sales unit | Material |
|--------|-------------|------------------------------------|-------------------------|------------|----------------------------|--------|-------------|------------------------------------|-------------------------|------------|----------|
| Socket | CB24350     | For 1S-A                           | SP Cupla type A sockets | 10         | Engineering plastics (POM) | Socket | CB26456     | For 10S-A                          | SP Cupla type A sockets | 1          | SUS 304  |
|        | CB24351     | For 2S-A                           |                         | 10         |                            |        | CB26457     | For 12S-A                          |                         | 1          |          |
|        | CB24352     | For 3S-A                           |                         | 10         |                            |        | CB26458     | For 16S-A                          |                         | 1          |          |
|        | CB24353     | For 4S-A                           |                         | 10         |                            |        |             |                                    |                         |            |          |
|        | CB24354     | For 6S-A                           |                         | 10         |                            |        |             |                                    |                         |            |          |
|        | CB24355     | For 8S-A                           |                         | 10         |                            |        |             |                                    |                         |            |          |


# Accessories for O-ring Maintenance

Jigs & grease for replacement of O-rings for SP Cupla Type A, Zerospill Cupla and HSP Cupla

- Quality of seal materials plays an important role in maintaining the performance of a Cupla. O-rings or seal materials of SP Cupla Type A, TSP Cupla, Zerosupill Cupla and HSP Cupla are designed to be replaceable. Please be certain to choose the correct and genuine Nitto kohki O-ring in order to maintain the performance of Cuplas.

### Jig for O-ring replacement

- Model: **PMJ-1 (Small)**  
(Part.No.CB23687)  
Sales unit: 1 pc.
- Model: **PMJ-2 (Large)**  
(Part.No.CB23688)  
Sales unit: 1 pc.

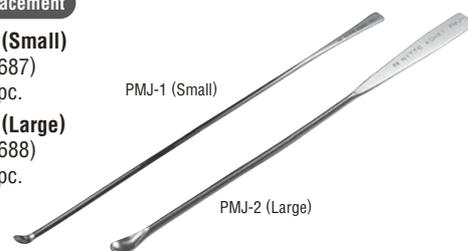

5mL container

### Grease for Cupla

- GRE-HC1** (Hydrocarbon grease) for NBR, FKM O-ring or packing (Part.No.CB28531)  
Sales unit: 1 pc.



5mL container

### Grease for Cupla

- GRE-M1** (Mineral grease) for NBR, FKM O-ring or packing (Part.No.CB23701)  
Sales unit: 1 pc.



5mL container

### Grease for Cupla

- GRE-S1** (Silicone grease) for NBR, FKM, and EPDM O-ring or packing (Part.No.CB23702)  
Sales unit: 1 pc.



| O-ring for<br>SP Cupla Type A | Part number |         |         | Sales unit |
|-------------------------------|-------------|---------|---------|------------|
|                               | NBR         | FKM     | EPDM    |            |
| For 1S-A                      | CP01314     | CP00907 | CP03270 | 1          |
| For 2S-A                      | CP00927     | CP00928 | CP03333 | 1          |
| For 3S-A                      | CP00955     | CP00956 | CP03276 | 1          |
| For 4S-A                      | CP00978     | CP00979 | CP03283 | 1          |
| For 6S-A                      | CP01003     | CP01004 | CP03292 | 1          |
| For 8S-A                      | CP01029     | CP01030 | CP03298 | 1          |
| For 10S-A                     | CP00398     | CP01053 | CP07179 | 1          |
| For 12S-A                     | CP01076     | CP01077 | CP03902 | 1          |
| For 16S-A                     | CP01099     | CP01100 | CP06953 | 1          |

| O-ring for<br>TSP Cupla | Part number |         |         | Sales unit |
|-------------------------|-------------|---------|---------|------------|
|                         | NBR         | FKM     | EPDM    |            |
| For 1TS                 | CP03987     | CP04984 | CP09795 | 1          |
| For 2TS                 | CP01314     | CP00907 | CP03270 | 1          |
| For 3TS                 | CP00927     | CP00928 | CP03333 | 1          |
| For 4TS                 | CP00955     | CP00956 | CP03276 | 1          |
| For 6TS                 | CP00978     | CP00979 | CP03283 | 1          |
| For 8TS                 | CP00387     | CP01258 | CP04923 | 1          |
| For 10TS                | CP01273     | CP01274 | CP09221 | 1          |
| For 12TS                | CP00398     | CP01053 | CP07179 | 1          |
| For 16TS                | CP01304     | CP01305 | CP09794 | 1          |

| O-ring for<br>HSP Cupla | Part number |         | Sales unit |
|-------------------------|-------------|---------|------------|
|                         | NBR         | FKM     |            |
| For 2HS                 | CP01185     | CP02215 | 1          |
| For 3HS                 | CP01194     | CP03335 | 1          |
| For 4HS                 | CP00294     | CP02093 | 1          |
| For 6HS                 | CP00294     | CP02093 | 1          |
| For 66HS                | CQ33388     | CP25937 | 1          |
| For 8HS                 | TP00293     | CP01179 | 1          |
| For 10HS                | CP01516     | CP03371 | 1          |
| For 12HS                | CP01516     | CP03371 | 1          |
| For 16HS                | CP03035     | CP03453 | 1          |

| Backup ring<br>for HSP Cupla | Part number | Sales unit |
|------------------------------|-------------|------------|
|                              | PTFE        |            |
| For 2HS                      | CP01186     | 1          |
| For 3HS                      | CP01195     | 1          |
| For 4HS                      | CP01203     | 1          |
| For 6HS                      | CP01203     | 1          |
| For 66HS                     | CP09659     | 1          |
| For 8HS                      | CP01211     | 1          |
| For 10HS                     | CP01517     | 1          |
| For 12HS                     | CP01517     | 1          |
| For 16HS                     | CP03036     | 1          |

| O-ring for<br>Zerosupill Cupla | Part number |         |         | Sales unit |
|--------------------------------|-------------|---------|---------|------------|
|                                | NBR         | FKM     | EPDM    |            |
| For ZEL-2S                     | CQ40611     | CQ40740 | CQ40742 | 1          |
| For ZEL-3S                     | CQ40628     | CQ40744 | CQ40746 | 1          |
| For ZEL-4S                     | CQ40645     | CQ40748 | CQ40750 | 1          |
| For ZEL-6S                     | CQ40662     | CQ40752 | CQ40754 | 1          |
| For ZEL-8S                     | CQ40679     | CQ40756 | CQ40758 | 1          |

| O-ring for<br>HSU Cupla | Part number | Sales unit |
|-------------------------|-------------|------------|
|                         | HNBR        |            |
| HSU-2S                  | CQ42490     | 1          |
| HSU-3S                  | CQ42496     | 1          |
| HSU-4S                  | CQ42502     | 1          |
| HSU-6S                  | CQ43482     | 1          |
| HSU-8S                  | CQ43489     | 1          |


• See page 156 for replacement of the O-ring.

# Purge Adapter

Metal Purge Adapter for hydraulic lines (Semi-standard)

- Can be attached to hydraulic lines to purge residual pressure effectively.


|                           |   |
|---------------------------|---|
| Model                     | <b>PAD-2</b> (Part No.CB19855)                        |
| Applicable fluid          | Hydraulic oil   |
| Material                  | Steel (With autocatalytic nickel-phosphorus coating)  |
| Working pressure          | 35.0 MPa, 357 kgf/cm <sup>2</sup> , 350 bar, 5080 PSI |
| Seal material             | Nitrile rubber (NBR)                                  |
| Working temperature range | -5°C to +80   |

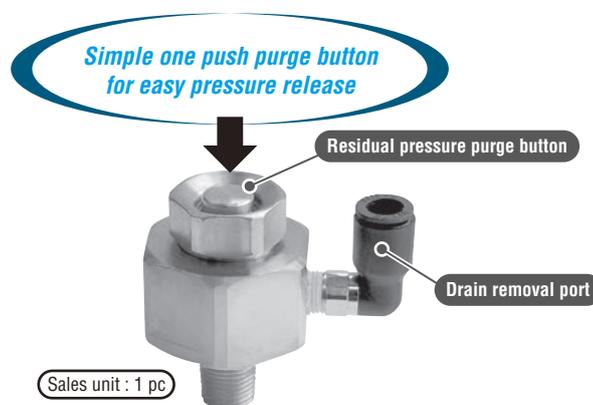

# Residual Pressure Release Jig

Residual Pressure Release Metal Jig for SP Cupla Type A and Hydraulic Cuplas (Semi-standard)

- Residual pressure within socket or plug can be released easily just by turning the handle.
- Residual pressure release jigs are available in two types; socket type for use with plugs and plug type for use with sockets.
- Connecting to sockets or plugs is the same as connecting normal Cuplas.

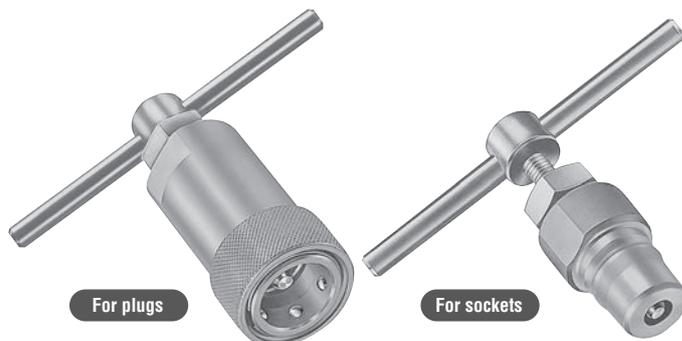

The photos show the jigs for HSP Cupla.

| Model  | Attachable Cuplas   | Sales unit |
|--|---|------------|
| The model name is to be defined in the following manner.<br><b>Z N</b> – Type of Cupla to be attached<br>Residual pressure release jig | Example: For the Cupla model 350-3S, the jig name would be <b>ZN-350-3S</b><br>Sockets and plugs for SP Cupla Type A, HSP Cupla, 210 Cupla, S210 Cupla, 280 Cupla and 350 Cupla | 1 pc.      |

# Cupla Adapter for Braided Hose Connection

Mounts on Cupla plug / socket with female thread

- Adapter for Cuplas with female thread such as Zerospill Cupla and SP Cupla Type A.
- No hose clamp is required resulting in reduced risk of injuries to fingers or palms.
- Deterioration of the braided hose at the hose barb part has been eliminated.
- Unique nut construction increases the pulling load of braided hoses.
- Simply push a braided hose onto the hose barb to the end and tighten the nut until it is flush against the hose barb base.
- No inner parts for conventional braided hose fittings are required. Thus incorrect assembling does not occur.

A tool and a hose clamp are not required.



Not Required

Please use braided hoses available in the market.

## Specifications

|                              |  |              |              |              |
|------------------------------|--|--------------|--------------|--------------|
| Body material                | Brass  |              |              |              |
| Model                        | BH90-3M  | BH120-4M     | BH150-4M     | BH190-6M     |
| Size (Thread)                | 3/8"   | 1/2"         | 1/2"         | 3/4"         |
| Braided hose size            | ø9 x ø15 mm  | ø12 x ø18 mm | ø15 x ø22 mm | ø19 x ø26 mm |
| Working pressure *1,*2       | Depends upon the specifications of braided hoses to be used. |              |              |              |
| Working temperature range *2 | Depends upon the specifications of braided hoses to be used. |              |              |              |
| Applicable fluids *3         | Air, Water, Oil  |              |              |              |

## Max. Tightening Torque

Nm {kgf·cm}

|                                  |          |          |          |          |
|----------------------------------|----------|----------|----------|----------|
| Model                            | BH90-3M  | BH120-4M | BH150-4M | BH190-6M |
| Torque (Taper Pipe Threads) *4,5 | 12 {122} | 30 {306} | 30 {306} | 50 {510} |

\*1: This shows the normal allowable fluid pressure under continuous use.

\*2: Working pressure and working temperature of Cupla and Adapter for braided hoses depend upon the specifications of braided hoses to be used.

\*3: Use within the specification of the seal material and the braided hose to be used.

\*4: Stress corrosion crack may happen on brass Cupla and Adapter if they are used under corrosive environment. Take note of usage conditions.

\*5: Tighten the nut until it is flush against the hose barb base after pushing a braided hose to the end.

• Braided hoses should be made of soft PVC and woven by reinforcement thread.

NEW



Application Example

Can be mounted on the plug and socket of Zerospill Cupla.


Benefits without a hose clamp

Two piece design


## Models and Dimensions

WAF : WAF stands for width across flats.

### BH-M type (Male thread)

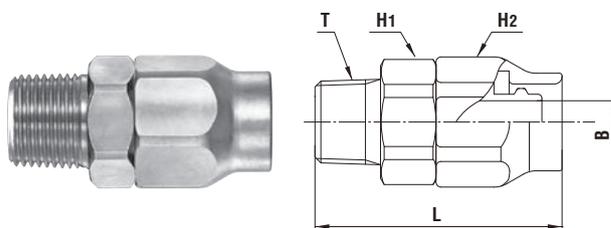

| Model    | Application (Hose) (mm) | Hose wall thickness (mm) | Mass (g) | Dimensions (mm) |          |          |       |     |
|----------|-------------------------|--------------------------|----------|-----------------|----------|----------|-------|-----|
|          |                         |                          |          | L               | H1 (WAF) | H2 (WAF) | T     | øB  |
| BH90-3M  | ø9 x ø15                | 3±0.3                    | 106      | (49)            | Hex.23   | Hex.24   | R 3/8 | 8.5 |
| BH120-4M | ø12 x ø18               | 3±0.3                    | 159      | (59)            | Hex.27   | Hex.27   | R 1/2 | 11  |
| BH150-4M | ø15 x ø22               | 3.5±0.35                 | 210      | (67)            | Hex.30   | Hex.30   | R 1/2 | 13  |
| BH190-6M | ø19 x ø26               | 3.5±0.35                 | 301      | (74)            | Hex.35   | Hex.35   | R 3/4 | 17  |

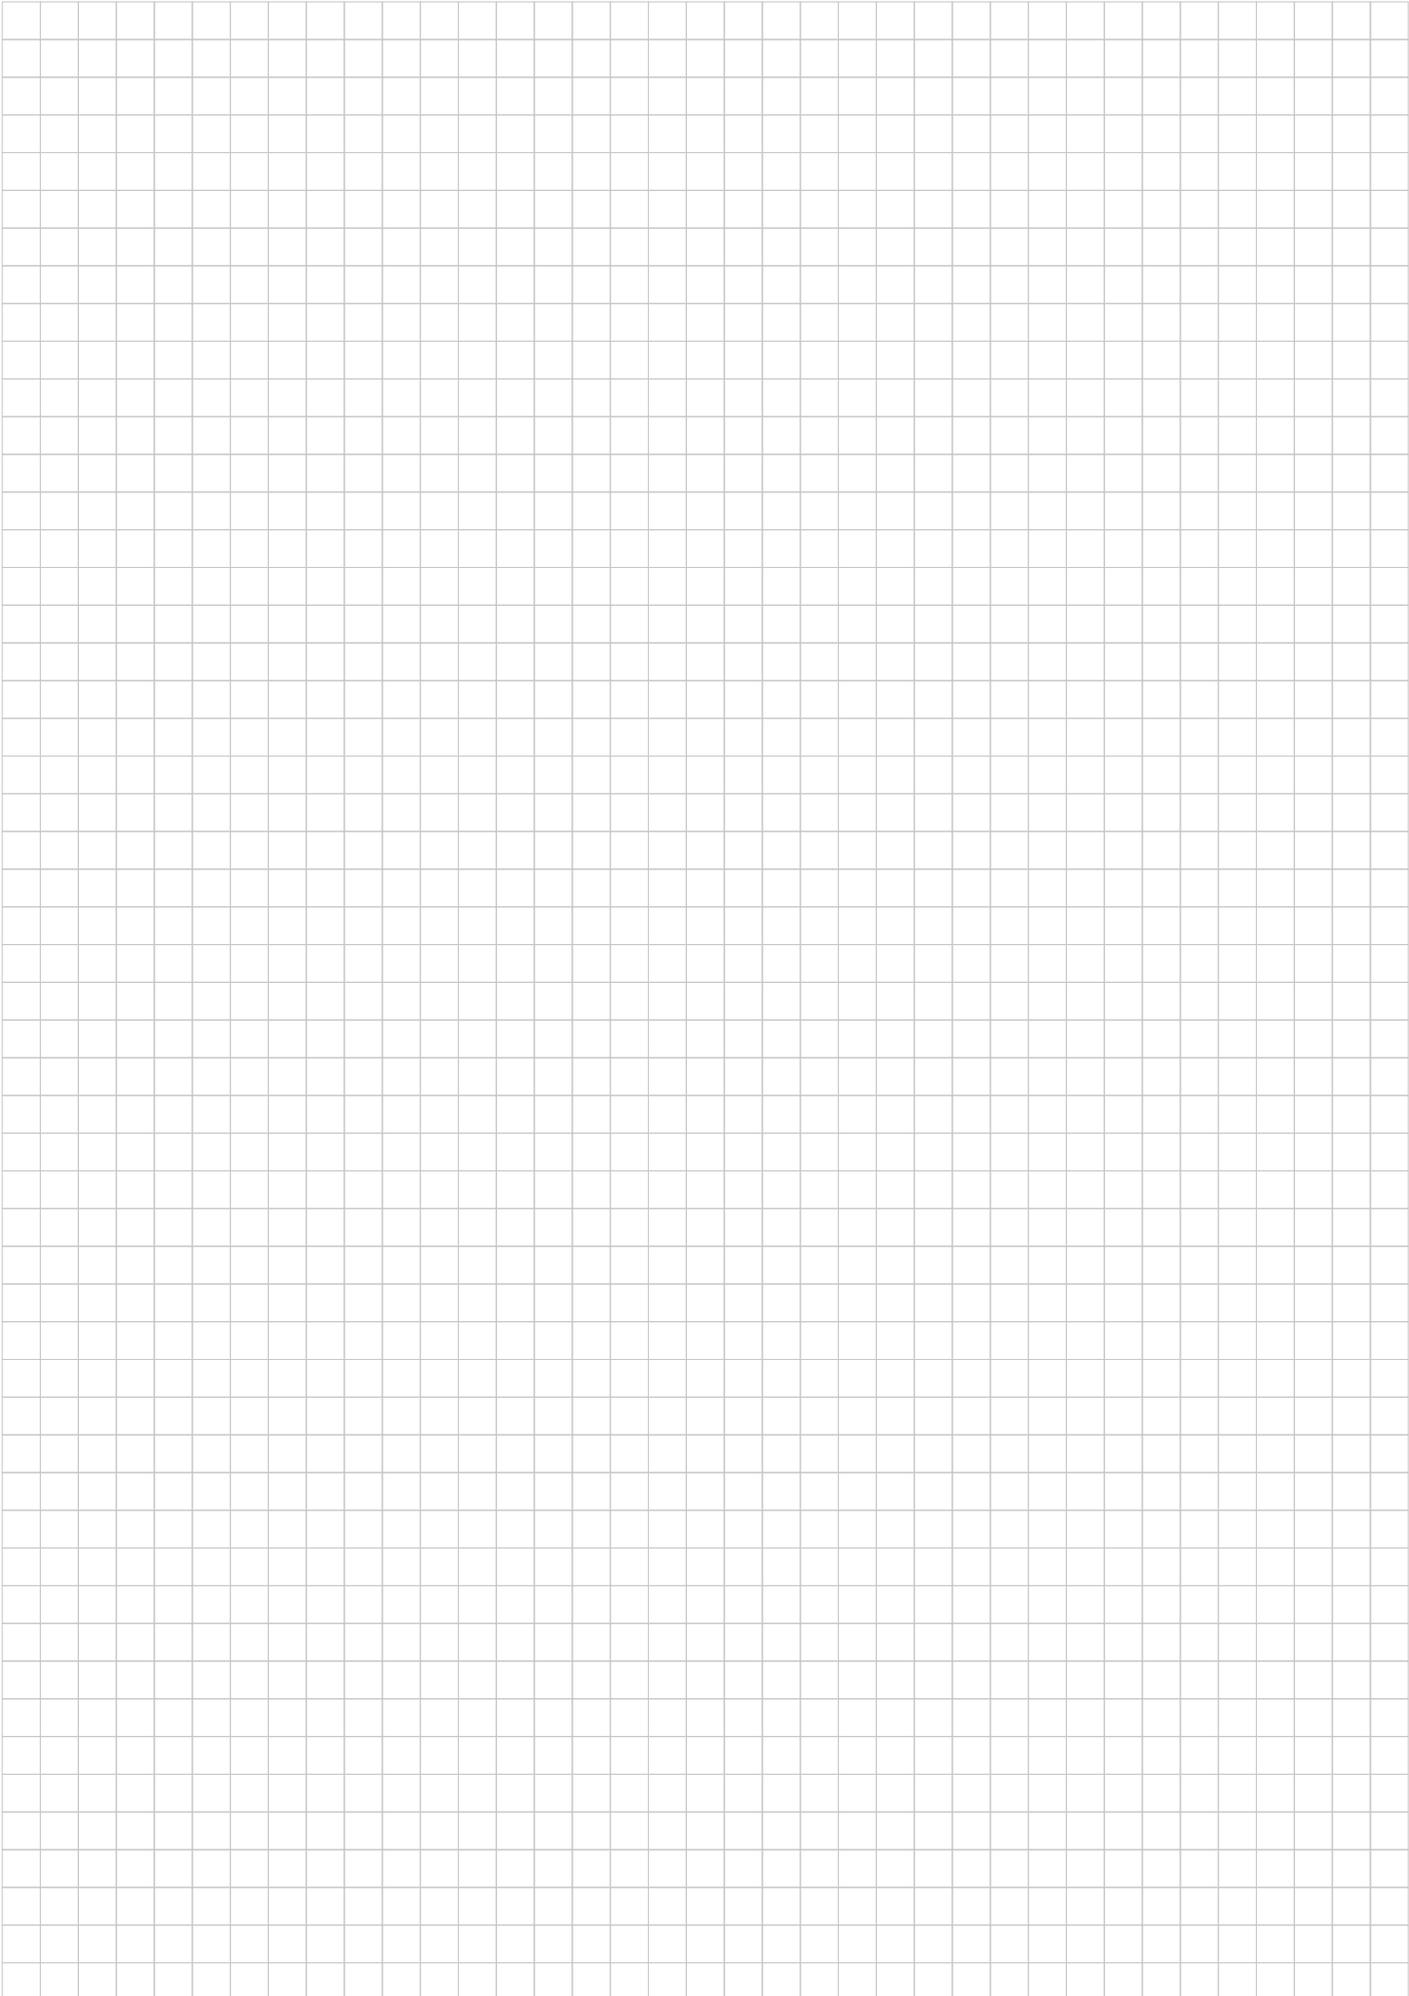

# Seal Material Selection Table for Reference

For seal parts in the Cupla (the important parts that prevent leaking to the outside), it is important to select the most appropriate seal material to suit the property and temperature of the fluid. It is so important that wrong selection may not only completely malfunction the Cupla but also cause an unexpected accident.

\*When the fluid in question is not listed in "Seal Material Selection Table (For reference)," the seal material that you select should be tested under actual environment. Even if the fluid is stated in the following list, the test could be required in some cases.

|   | Fluids                        | Seal Material         |                             |                           |               |                     |                 |                    |   |
|---|-------------------------------|-----------------------|-----------------------------|---------------------------|---------------|---------------------|-----------------|--------------------|---|
|   |                               | Nitrile rubber        | Hydrogenated nitrile rubber | Ethylene-propylene rubber | Fluoro rubber | Perfluoro-elastomer | Silicone rubber | Chloroprene rubber |   |
| 2 | 2,2-Dimethyl-butane           | ○                     | ○                           | ×                         | ○             | ○                   | ×               | △                  |   |
|   | 2,3-Dimethyl-butane           | ○                     | ○                           | ×                         | ○             | ○                   | ×               | △                  |   |
|   | 2,4-Dimethyl-pentane          | ○                     | ○                           | ×                         | ○             | ○                   | ×               | ×                  |   |
|   | 2-Methyl-pentane              | ○                     | ○                           | ×                         | ○             | ○                   | ×               | ×                  |   |
| 3 | 3-Methyl-pentane              | ○                     | ○                           | ×                         | ○             | ○                   | ×               | ×                  |   |
| A | Acetaldehyde                  | △                     | △                           | ○                         | ×             | △                   | ○               | △                  |   |
|   | Acetic acid                   | ○                     | ○                           | ○                         | △             | ○                   | △               | ○                  |   |
|   | Acetic anhydride              | △                     | ×                           | ○                         | ×             | ○                   | ○               | ○                  |   |
|   | Acetone                       | ×                     | ×                           | ○                         | ×             | ○                   | ×               | ×                  |   |
|   | Acetonitrile                  | △                     |                             | ○                         | ○             | ○                   | ×               | ×                  |   |
|   | Acetophenone                  | ×                     | ×                           | ○                         | ×             | ○                   | ×               | ×                  |   |
|   | Acetyl chloride               | ×                     | ×                           | ×                         | ○             | ○                   | ×               | ×                  |   |
|   | Acetylacetone                 | ×                     | ×                           | ○                         | ×             | ○                   | ×               | ×                  |   |
|   | Acetylene                     |                       |                             | ○                         | ○             | ○                   | ○               | ○                  |   |
|   | Air (50°C)                    | ○                     | ○                           | ○                         | ○             | ○                   | ○               | ○                  |   |
|   | Aluminium bromide             | ○                     | ○                           | ○                         | ○             | ○                   | ○               | ○                  |   |
|   | Aluminium chloride            | ○                     | ○                           | ○                         | ○             | ○                   | ○               | ○                  |   |
|   | Aluminium nitrate             | ○                     | ○                           | ○                         | ○             | ○                   | ○               | ○                  |   |
|   | Aluminium sulfate             | ○                     | ○                           | ○                         | ○             | ○                   | ○               | ○                  |   |
|   | Amine mixture                 | ×                     | ×                           | ○                         | ×             | ×                   | ○               | ○                  |   |
|   | Ammonia (anhydrous)           | ○                     | ○                           | ○                         | ×             | ○                   | ○               | ○                  |   |
|   | Ammonia (Liquid) (65°C)       | △                     |                             |                           | ×             | ○                   | △               |                    |   |
|   | Ammonia (Liquid) (Cool)       | △                     |                             | ○                         | ×             | ○                   | ○               | ○                  |   |
|   | Ammonia gas (Low temperature) | ○                     | ○                           | ○                         | ×             | ○                   | ○               | ○                  |   |
|   | Ammonium carbonate            | ×                     | ×                           | ○                         | ○             | ○                   | ×               | ○                  |   |
|   | Ammonium chloride             | ○                     | ○                           | ○                         | ○             | ○                   | ×               | ○                  |   |
|   | Ammonium hydroxide            | ×                     | ×                           | ○                         | ×             | ×                   | ○               | △                  |   |
|   | Ammonium magnesium sulfate    | ×                     |                             | ×                         | ×             |                     | ×               | ×                  |   |
|   | Ammonium nitrate (65°C)       | ○                     | ○                           | ○                         |               |                     | ○               | ○                  |   |
|   | Ammonium phosphate (65°C)     | ○                     |                             | ○                         | ×             | ○                   | ○               | ○                  |   |
|   | Ammonium sulfate              | ○                     | ○                           | ○                         | ×             | ○                   | ○               | ○                  |   |
|   | Ammonium sulfite              | △                     | △                           | ○                         | △             | ○                   | ○               | ○                  |   |
|   | Ammonium thiosulfate          | △                     | △                           | ○                         | △             | ○                   | ○               | ○                  |   |
|   | Amyl acetate                  | ×                     | ×                           | △                         | ×             | ○                   | ×               | ×                  |   |
|   | Amyl alcohol                  | ○                     | ○                           | ○                         | ○             | ○                   | ×               | ○                  |   |
|   | Aniline                       | ×                     | ×                           | ○                         | △             | ○                   | ×               | ×                  |   |
|   | Animal oil (Lard)             | ○                     | ○                           | ○                         | ○             | ○                   | ○               | ○                  |   |
|   | Arsenic trichloride           | △                     |                             | ×                         | ×             | ○                   | ×               | ×                  |   |
|   | Asphalt                       | ○                     | ○                           | ×                         | ○             | ○                   | ×               | ×                  |   |
|   | B                             | Barium chloride       | ○                           | ○                         | ○             | ○                   | ○               | ○                  | ○ |
|   |                               | Barium hydroxide      | ○                           | ○                         | ○             | ○                   | ○               | ○                  | ○ |
|   |                               | Barium nitrate        | △                           | △                         | ○             | △                   | ○               | ○                  | ○ |
|   |                               | Barium sulfate (65°C) | ○                           |                           | ○             | ○                   | ○               | ○                  | ○ |
|   |                               | Barium sulfide        | ○                           | ○                         | ○             | ○                   | ○               | ○                  | ○ |
|   |                               | Beer                  | ○                           | ○                         | ○             | ○                   | ○               | ○                  | ○ |
|   |                               | Benzaldehyde          | ×                           | ×                         | ○             | ×                   | ○               | ○                  | × |
|   |                               | Benzene               | ×                           | ×                         | ×             | ○                   | ○               | ×                  | × |
|   |                               | Benzyl alcohol        | ×                           | ×                         | ○             | ○                   | ○               | △                  | ○ |
|   |                               | Benzyl chloride       | ×                           | ×                         | ×             | ○                   | ○               | ×                  | × |
|   |                               | Brake oil             | △                           | △                         | ○             | ×                   | ○               | △                  | ○ |
|   |                               | Bromine               | ×                           | ×                         | ×             | ○                   | ○               | ×                  | × |
|   |                               | Bromine water         | ×                           | ×                         | ×             | ○                   | ○               | ×                  | × |

|                           | Fluids                  | Seal Material          |                             |                           |               |                     |                 |                    |   |
|---------------------------|-------------------------|------------------------|-----------------------------|---------------------------|---------------|---------------------|-----------------|--------------------|---|
|                           |                         | Nitrile rubber         | Hydrogenated nitrile rubber | Ethylene-propylene rubber | Fluoro rubber | Perfluoro-elastomer | Silicone rubber | Chloroprene rubber |   |
| B                         | Butadiene               | ×                      | ×                           | ×                         | ○             | ○                   | ×               | ×                  |   |
|                           | Butane                  | ○                      | ○                           | ×                         | ○             | ○                   | ×               | △                  |   |
|                           | Butane (liquid)         | ○                      |                             | ×                         | ○             |                     | ×               | ○                  |   |
|                           | Butanol (Butyl alcohol) | ○                      | ○                           | ○                         | ○             | ○                   | ○               | ○                  |   |
|                           | Butter and butter oil   | ○                      | ○                           | ○                         | ○             | ○                   | ○               | ×                  |   |
|                           | Butyl acetate           | ×                      | ×                           | ○                         | ×             | ○                   | ×               | ×                  |   |
|                           | Butyl stearate          | ○                      | ○                           | ×                         | ○             | ○                   | ×               | ×                  |   |
|                           | Butylaldehyde           | ×                      | ×                           | ○                         | ×             | ○                   | ×               | ×                  |   |
|                           | Butylene                | ○                      | ○                           | ×                         | ○             | ○                   | ×               | △                  |   |
|                           | C                       | Cadmium cyanide        | △                           | △                         | ○             | △                   | ○               | ○                  | ○ |
|                           |                         | Calcium acetate        | ○                           | ○                         | ○             | ×                   | ○               | ×                  | ○ |
|                           |                         | Calcium acetate (65°C) | ○                           |                           | ○             | ×                   | ○               | ×                  | ○ |
|                           |                         | Calcium carbide        |                             |                           |               |                     | ○               |                    |   |
| Calcium carbonate         |                         | ○                      | ○                           | ○                         | ○             | ○                   | ○               | ○                  |   |
| Calcium hydroxide         |                         | ○                      |                             |                           | ○             | ○                   | ○               | ○                  |   |
| Calcium nitrate (65°C)    |                         | ○                      |                             | ○                         | ○             | ○                   | ○               | ○                  |   |
| Calcium perchlorate       |                         | ×                      |                             | ×                         | ×             |                     | ×               | ×                  |   |
| Calcium sulfate           |                         | △                      | △                           | ○                         | △             | ○                   | ○               | ○                  |   |
| Calcium sulfate (65°C)    |                         | ×                      |                             | ○                         | △             | ○                   | ○               | ○                  |   |
| Calcium sulfite           |                         | ○                      | ○                           | ○                         | ○             | ○                   | ○               | ○                  |   |
| Carbitol                  |                         | ○                      | ○                           | ○                         | ○             | ○                   | ○               | ○                  |   |
| Carbon dioxide gas (65°C) |                         | ○                      |                             | ○                         | ○             |                     | ○               | ○                  |   |
| Carbon disulfide          |                         | ×                      | ×                           | ×                         | ○             | ○                   | ×               | ×                  |   |
| Carbon monoxide (65°C)    |                         | ○                      | ○                           | ○                         | ○             | ○                   | ○               | ○                  |   |
| Carbon tetrachloride      |                         | ○                      | ○                           | ×                         | ○             | ○                   | ×               | ×                  |   |
| Castor oil                |                         | ○                      | ○                           | ○                         | ○             | ○                   | ○               | ○                  |   |
| Chlorine (liquid)         |                         | ×                      |                             | ×                         | ×             | ○                   | ×               | ×                  |   |
| Chlorine gas              |                         | ○                      | ○                           | ×                         | ○             | ○                   | ×               | ×                  |   |
| Chlorine water            |                         | △                      | △                           | ○                         | ○             | ○                   | ×               | ×                  |   |
| Chloroacetone             |                         | ×                      | ×                           | ○                         | ×             | ○                   | ×               | ×                  |   |
| Chlorobenzene             |                         | ×                      | ×                           | ×                         | ○             | ○                   | ×               | ×                  |   |
| Chloroform                |                         | ×                      | ×                           | ×                         | ○             | ○                   | ×               | ×                  |   |
| Chlorophenol              |                         | ×                      | ×                           | ×                         | ○             | ○                   | ×               | ×                  |   |
| Chromium hydroxide        |                         |                        |                             |                           |               | ○                   |                 |                    |   |
| Coconut oil               |                         | ○                      | ○                           | △                         | ○             | ○                   | ○               | ×                  |   |
| Cod liver oil             |                         | ○                      |                             | ○                         | ○             | ○                   | ○               | ○                  |   |
| Coffee                    |                         | ○                      |                             | ×                         | ×             |                     | ×               | ×                  |   |
| Copper chloride           |                         | ○                      | ○                           | ○                         | ○             | ○                   | ○               | ○                  |   |
| Copper cyanide            |                         | ○                      | ○                           | ○                         | ○             | ○                   | ○               | ○                  |   |
| Copper sulfate            |                         | ○                      | ○                           | ○                         | ○             | ○                   | ○               | ○                  |   |
| Corn oil                  |                         | ○                      | ○                           | △                         | ○             | ○                   | ○               | △                  |   |
| Cotton seed oil           | ○                       | ○                      | △                           | ○                         | ○             | ○                   | △               |                    |   |
| Gresol (50°C)             | ×                       | ×                      | ×                           | ○                         | ○             | ×                   | ×               |                    |   |
| Crude oil                 | ○                       | ○                      | ×                           | ○                         | ○             | ×                   | ×               |                    |   |
| Cyclohexane               | ○                       | ○                      | ×                           | ○                         | ○             | ×                   | ×               |                    |   |
| Cyclohexanol              | ○                       | ○                      | ×                           | ○                         | ○             | ×                   | ×               |                    |   |
| D                         | Developer               | ○                      | ○                           | ○                         | ○             | ○                   | ○               |                    |   |
|                           | Diacetone alcohol       | ×                      | ×                           | ○                         | ×             | ○                   | ×               |                    |   |
|                           | Dibenzyl ether          | ×                      | ×                           | ○                         | ×             | ○                   | ×               |                    |   |
|                           | Dichlorophenol          | ○                      | ○                           | ×                         | ○             | ○                   | ×               |                    |   |
|                           | Diesel oil              | ○                      | ○                           | ×                         | ○             | ○                   | ×               |                    |   |
|                           | Diethanolamine          | △                      | △                           | ○                         | △             | ○                   | ○               |                    |   |

**How to read the selection tables**

- ⊙ Practically no harm, and can be used (Excellent)
  - Some harm may be inevitable but can be used under restrictions (Good)
  - △ Should be avoided if at all possible (Not recommended)
  - × Should not be used (Unsuitable)
- Note: Contact us when the space is blank.

**Note:**

- When selecting the seal material, please consider the following suggestions carefully:
1. If there is no comment in the column of the fluid name, the condition of the fluid is under saturation at room temperature.
  2. Please check with us for applications at a high fluid temperature or with different fluid concentrations.
  3. For applications related to foods, please order separately specifying the detailed applications.

|                     | Fluids                                       | Seal Material       |                             |                           |               |                     |                 |                    |   |
|---------------------|--|---------------------|-----------------------------|---------------------------|---------------|---------------------|-----------------|--------------------|---|
|                     |  | Nitrile rubber      | Hydrogenated nitrile rubber | Ethylene-propylene rubber | Fluoro rubber | Perfluoro-elastomer | Silicone rubber | Chloroprene rubber |   |
| D                   | Diethylene glycol                            | ⊙                   |                             | ⊙                         | ⊙             | ⊙                   | ○               | ⊙                  |   |
| E                   | Ethanol (Ethyl alcohol)                      | △                   | △                           | ⊙                         | △             | ⊙                   | ○               | ⊙                  |   |
|                     | Ethyl acetate                                | ×                   |                             | ○                         | ×             |                     | ○               | ×                  |   |
|                     | Ethyl benzene                                | ×                   | ×                           | ×                         | ⊙             | ⊙                   | ×               | ×                  |   |
|                     | Ethyl cellulose                              | ○                   | ○                           | ○                         | ×             | ⊙                   | ○               | ○                  |   |
|                     | Ethyl chloride                               | ⊙                   | ⊙                           | △                         | ⊙             | ⊙                   | ×               | ×                  |   |
|                     | Ethylene glycol                              | ⊙                   | ⊙                           | ⊙                         | ⊙             | ⊙                   | ⊙               | ⊙                  |   |
|                     | Ethylene trichloride                         | ×                   | ×                           | △                         | ⊙             | ⊙                   | ×               | ×                  |   |
|                     | F  | Ferric sulfate      | ⊙                           | ⊙                         | ⊙             | ⊙                   | ⊙               |                    | ⊙ |
|                     | Fish oil                                     | ○                   | ○                           | ×                         | ⊙             | ⊙                   | ⊙               | ×                  |   |
|                     | Fluorine (Gas)                               | ×                   |                             | ×                         | ×             | ○                   | ×               | ×                  |   |
|                     | Formic aldehyde                              | △                   | △                           | ○                         | ×             | ⊙                   | ○               | △                  |   |
|                     | Freon 11                                     | ○                   | ×                           | ×                         | ○             | ○                   | ×               | ×                  |   |
|                     | Freon 12                                     | ⊙                   | ○                           | △                         | △             | ○                   | ×               | ⊙                  |   |
|                     | Freon 22                                     | ×                   | ×                           | △                         | ×             | ⊙                   | ×               | ⊙                  |   |
|                     | Fuel oil                                     | ⊙                   |                             | ×                         | ⊙             | ⊙                   | ×               | ○                  |   |
|                     | Furfural                                     | ×                   | ×                           | ○                         | ×             | ⊙                   | ×               | ×                  |   |
| G                   | Gasoline                                     | ⊙                   | ⊙                           | ×                         | ⊙             | ⊙                   | ×               | ×                  |   |
|                     | Gelatin                                      | ⊙                   | ⊙                           | ⊙                         | ⊙             | ⊙                   | ⊙               | ⊙                  |   |
|                     | Glucose                                      | ⊙                   | ⊙                           | ⊙                         | ⊙             | ⊙                   | ⊙               | ⊙                  |   |
|                     | Glycerine (65°C)                             | ⊙                   | ⊙                           | ⊙                         | ⊙             | ⊙                   | ⊙               | ⊙                  |   |
|                     | Grease (Petroleum-based)                     | ⊙                   | ⊙                           | ×                         | ⊙             | ⊙                   | ×               | ×                  |   |
| H                   | Helium                                       | ⊙                   | ⊙                           | ⊙                         | ⊙             | ⊙                   | ⊙               | ⊙                  |   |
|                     | Heptane (n-heptane)                          | ⊙                   | ⊙                           | ×                         | ⊙             | ⊙                   | ×               | ○                  |   |
|                     | Hexane (n-hexane)                            | ⊙                   | ⊙                           | ×                         | ⊙             | ⊙                   | ×               | ○                  |   |
|                     | Hexylene glycol                              | △                   | △                           | ⊙                         | △             | ⊙                   | ○               | ⊙                  |   |
|                     | Hydraulic oil (Petroleum-based)              | ⊙                   | ⊙                           | ×                         | ⊙             | ⊙                   | ○               | ×                  |   |
|                     | Hydraulic oil (Phosphate ester series)       | ×                   | ×                           | ○                         | ⊙             | ⊙                   | △               | ×                  |   |
|                     | Hydraulic oil (Synthetically-prepared)       | ○                   | ○                           | ×                         | ⊙             | ⊙                   |                 | ×                  |   |
|                     | Hydraulic oil (Water-glycol series)          | ⊙                   | ⊙                           | ○                         | ⊙             | ⊙                   | ○               | ⊙                  |   |
|                     | Hydraulic oil (Water-in-oil emulsion series) | ⊙                   | ⊙                           | ×                         | ⊙             | ⊙                   | △               | ×                  |   |
|                     | Hydrobromic acid                             | ×                   | ×                           | ⊙                         | ⊙             | ⊙                   | ×               | ×                  |   |
|                     | Hydrogen                                     | ⊙                   | ⊙                           | ⊙                         | ⊙             | ⊙                   | △               | ⊙                  |   |
|                     | Hydrogen peroxide (30%)                      | ×                   |                             |                           | ⊙             | ⊙                   |                 | ×                  |   |
|                     | I  | Iron chloride       | ⊙                           |                           | ⊙             | ⊙                   |                 | ○                  | ⊙ |
|                     |  | Iron nitrate (65°C) | ⊙                           |                           | ⊙             | ⊙                   |                 | ○                  | ⊙ |
| Iron sulfite (100%) |  | ⊙                   |                             | ×                         | ×             |                     | ×               | ×                  |   |
| Isoamyl alcohol     |  | ×                   |                             | ×                         | ×             |                     | ×               | ×                  |   |
| Isooctane           |  | ⊙                   | ⊙                           | ×                         | ⊙             | ⊙                   | ×               | ○                  |   |
| Isopropanol         |  | ○                   | ○                           | ⊙                         | ⊙             | ⊙                   | ⊙               | ○                  |   |
| Isopropyl acetate   |  | ×                   | ×                           | ○                         | ×             | ⊙                   | ×               | ×                  |   |
| Isopropyl alcohol   |  | ○                   | ○                           | ⊙                         | ⊙             | ⊙                   | ⊙               | ○                  |   |
| Isopropyl ether     |  | ○                   | ○                           | ×                         | ×             | ⊙                   | ×               | ×                  |   |
| K                   |  | Kerosene            | ⊙                           | ⊙                         | ×             | ⊙                   | ⊙               | ×                  | ○ |
| L                   | Lard and lard oil                            | ⊙                   | ⊙                           | ○                         | ⊙             | ⊙                   | ○               | ○                  |   |
|                     | Latex  | ×                   |                             | ×                         | ×             |                     | ×               | ×                  |   |
|                     | Liquefied petroleum gas (LPG)                | ⊙                   | ⊙                           | ×                         | ⊙             | ⊙                   | △               | ×                  |   |
|                     | Liquors (beet)                               | ⊙                   | ⊙                           | ⊙                         | ⊙             | ⊙                   | ⊙               | ⊙                  |   |
|                     | Lubricating oil (SAE 10, 20, 30, 40, 50)     | ⊙                   | ⊙                           | ×                         | ⊙             | ⊙                   | ×               | ×                  |   |
| M                   | Magnesium chloride                           | ⊙                   | ⊙                           | ⊙                         | ⊙             | ⊙                   | ⊙               | ⊙                  |   |
|                     | Magnesium hydroxide                          | ○                   | ○                           | ⊙                         | ⊙             | ⊙                   | ×               | ○                  |   |
|                     | Magnesium nitrate                            | ⊙                   |                             | ×                         | ×             |                     | ×               | ×                  |   |

|                               | Fluids                        | Seal Material  |                             |                           |               |                     |                 |                    |
|-------------------------------|-------------------------------|----------------|-----------------------------|---------------------------|---------------|---------------------|-----------------|--------------------|
|                               |                               | Nitrile rubber | Hydrogenated nitrile rubber | Ethylene-propylene rubber | Fluoro rubber | Perfluoro-elastomer | Silicone rubber | Chloroprene rubber |
| M                             | Magnesium sulfate             | ⊙              |                             | ⊙                         | ⊙             | ⊙                   | ⊙               | ⊙                  |
|                               | Maleic anhydride              | ×              | ×                           | ○                         | ×             | ⊙                   | ×               | ×                  |
|                               | Mercury                       | ⊙              | ⊙                           | ⊙                         | ⊙             | ⊙                   | ×               | ⊙                  |
|                               | Methanol                      | ×              | ×                           | ⊙                         | ×             | ⊙                   | ⊙               | ⊙                  |
|                               | Methyl bromide                | ○              | ○                           | ×                         | ⊙             | ⊙                   | ×               | ×                  |
|                               | Methyl butyl ketone           | ×              | ×                           | ⊙                         | ×             | ⊙                   | ×               | ×                  |
|                               | Methyl chloride               | ×              | ×                           | △                         | ⊙             | ⊙                   | ×               | ×                  |
|                               | Methyl ethyl ketone (MEK)     | ×              | ×                           | ⊙                         | ×             | ⊙                   | ×               | ×                  |
|                               | Methyl isobutyl ketone (MIBK) | ×              | ×                           | △                         | ×             | ⊙                   | ×               | ×                  |
|                               | Methyl propyl ketone          | ×              |                             | ○                         | ×             |                     | ×               | ×                  |
|                               | Methyl salicylate             | ×              | ×                           | ○                         | ×             | ⊙                   | ×               | △                  |
|                               | Methylene bromide             | ×              |                             | ×                         | ⊙             | ⊙                   | ×               | ×                  |
|                               | Methylene chloride            | ×              |                             | ×                         | ○             | ⊙                   | ×               | ×                  |
|                               | Milk                          | ⊙              | ⊙                           | ⊙                         | ⊙             | ⊙                   | ⊙               | ⊙                  |
|                               | Mineral oil                   | ⊙              | ⊙                           | ×                         | ⊙             | ⊙                   | △               | △                  |
|                               | Monobromobenzene              | ×              |                             | ×                         | ⊙             | ⊙                   | ×               | ×                  |
|                               | Monochlorobenzene             | ×              | ×                           | ×                         | ⊙             | ⊙                   | ×               | ×                  |
| Monoethanolamine (MEA)        | ×                             | ×              | ○                           | ×                         | ⊙             | ○                   | ×               |                    |
| N                             | n-amyl alcohol                | ×              |                             | ×                         | ×             |                     | ×               | ×                  |
|                               | Naphtha                       | ○              | ○                           | ×                         | ⊙             | ⊙                   | ×               | ×                  |
|                               | Naphthalene                   | ×              | ×                           | ×                         | ⊙             | ⊙                   | ×               | ×                  |
|                               | Naphthenic oil                | ⊙              |                             | ×                         | ⊙             |                     | ×               | ×                  |
|                               | n-butyl alcohol               | ×              |                             | ×                         | ×             |                     | ×               | ×                  |
|                               | Nickel acetate                | ○              | ○                           | ⊙                         | ×             | ⊙                   | ×               | ○                  |
|                               | Nickel acetate (65°C)         | ×              |                             | ⊙                         | ×             |                     | ×               | ×                  |
|                               | Nickel ammonium sulfate       | △              |                             | ⊙                         | △             | ⊙                   | ○               | ⊙                  |
|                               | Nickel chloride               | ⊙              | ⊙                           | ⊙                         | ⊙             | ⊙                   | ⊙               | ⊙                  |
|                               | Nickel nitrate                | △              | △                           | ⊙                         | △             | ⊙                   | ○               | ⊙                  |
|                               | Nickel sulfate                | ⊙              | ⊙                           | ⊙                         | ⊙             | ⊙                   | ⊙               | ○                  |
|                               | Nitrobenzene                  | ×              | ×                           | △                         | ○             | ⊙                   | ×               | ×                  |
|                               | Nitrogen (gas)                | ⊙              | ⊙                           | ⊙                         | ⊙             | ⊙                   | ⊙               | ⊙                  |
| O                             | Octyl alcohol                 | ○              | ○                           | △                         | ⊙             | ⊙                   | ○               | ○                  |
|                               | Oleic acid                    | △              | △                           | ×                         | ○             | ⊙                   | ×               | ×                  |
|                               | Olive oil                     | ⊙              | ⊙                           | ○                         | ⊙             | ⊙                   | △               | ×                  |
|                               | Ortho-dichlorobenzene         | ×              | ×                           | ×                         | ⊙             | ⊙                   | ×               | ×                  |
|                               | Oxygen (gas)                  | ○              | ○                           | ⊙                         | ⊙             | ⊙                   | ⊙               | ○                  |
|                               | Ozone                         | ×              | △                           | ⊙                         | ⊙             | ⊙                   | ⊙               | ×                  |
|                               | P                             | Palm oil       | ×                           |                           | ×             | ×                   |                 | ×                  |
| Paradichlorobenzene           |                               | ×              | ×                           | ×                         | ⊙             | ⊙                   | ×               | ×                  |
| Paraffin oil                  |                               | ⊙              | ⊙                           | ×                         | ⊙             | ⊙                   | ×               | ×                  |
| Peanut oil                    |                               | ⊙              |                             | △                         | ⊙             |                     | ⊙               | ○                  |
| Pentane (n-pentane)           |                               | ⊙              | ⊙                           | ×                         | ⊙             | ⊙                   | ×               | ⊙                  |
| Phenol                        |                               | ×              | ×                           | ×                         | ⊙             | ⊙                   | ×               | ×                  |
| Phosphorous oxychloride (dry) |                               | ○              |                             | ⊙                         | ⊙             |                     | ○               | ○                  |
| Phosphorous oxychloride (wet) |                               | ○              |                             | ⊙                         | ⊙             |                     | ○               | ○                  |
| Phosphorus                    |                               | ×              |                             | ×                         | ×             | ⊙                   | ×               | ×                  |
| Pine oil                      |                               | ○              | ○                           | ×                         | ⊙             | ⊙                   | ×               | ×                  |
| Potassium acetate (65°C)      |                               | ○              | ○                           | ⊙                         | ×             | ⊙                   | ×               | ○                  |
| Potassium aluminium sulfate   |                               | △              | △                           | ⊙                         | △             | ⊙                   | ○               | ⊙                  |
| Potassium bicarbonate         |                               | △              | △                           | ⊙                         | △             | ⊙                   | ○               | ⊙                  |
| Potassium bichromate          |                               | ⊙              |                             | ⊙                         | ⊙             | ⊙                   | ⊙               | ⊙                  |
| Potassium carbonate           |                               | △              | △                           | ⊙                         | △             | ⊙                   | ○               | ⊙                  |



# Body Material Selection Table

The selection of appropriate body material for the Cupla is closely related to its usage application, the type of fluid run through, its concentration (%), the pressure, its working environment, etc. So the material must be carefully considered in order to use the Cupla efficiently and obtain its full performance. Since there are some body materials that should not be used with certain fluids, please refer to this table when making your selection.

○ Suitable    △ Not suitable under certain conditions    × Unsuitable

|                | Fluids               | Brass             | Stainless Steel | Steel | Aluminum | Polypropylene |   |
|----------------|----------------------|-------------------|-----------------|-------|----------|---------------|---|
| A              | Acetic acid          | ×                 | ○               |       | ×        | △             |   |
|                | Acetic anhydride     | ×                 | ○               |       | △        | ○             |   |
|                | Acetone              | ○                 | ○               | ○     | ○        | △             |   |
|                | Air                  | ○                 | ○               | ○     | ○        | ○             |   |
|                | Aluminum fluoride    | ○                 | ×               |       |          | ○             |   |
|                | Aluminum chloride    | ×                 | ×               |       | ×        | ○             |   |
|                | Aluminum sulfate     | ×                 | ○               |       |          | ○             |   |
|                | Ammonia              | ×                 | ○               |       | ×        | ○             |   |
|                | Ammonium nitrate     | ×                 | ○               |       |          | ○             |   |
|                | Ammonium phosphate   | △                 | ○               |       | ×        | ○             |   |
|                | Ammonium sulfate     | △                 | △               |       | ○        | ○             |   |
|                | Aniline              | ×                 | ○               |       | ○        | △             |   |
|                | Arsenic acid         | △                 | ○               |       | △        | ○             |   |
|                | B                    | Barium chloride   | ×               | ×     |          |               | ○ |
|                |                      | Barium hydroxide  | ×               | ○     |          | ×             | ○ |
| Barium sulfide |                      |                   | ○               | ○     |          | ○             |   |
| Beer           |                      | ○                 | ○               | △     | ○        | ○             |   |
| Benzene        |                      | ×                 | ○               | ○     | ○        | △             |   |
| Benzine        |                      | ○                 | ○               | ○     | ○        | △             |   |
| Boric acid     |                      | △                 | ○               |       | ×        | ○             |   |
| Butane         |                      | ○                 | ○               | ○     |          | ○             |   |
| Butyl acetate  |                      | ○                 | ○               | ○     | ○        | △             |   |
| C              |                      | Calcium chloride  | ○               | △     |          | △             | ○ |
|                |                      | Calcium hydroxide | ○               | ○     | ○        | ×             | ○ |
|                |                      | Carbon dioxide    | ○               | ○     | ○        | ○             | ○ |
|                | Carbon disulfide     | ○                 | ○               | ○     |          | ×             |   |
|                | Carbon tetrachloride | △                 | ○               |       | ×        | ×             |   |
|                | Carbonic acid        | ○                 | ○               | ○     | ○        | ○             |   |
|                | Chlorine             |                   | ×               |       |          | ×             |   |
|                | Caustic soda         |                   | △               |       | ×        | ○             |   |
|                | Chromic acid         | ×                 | ×               |       | ×        | ×             |   |
|                | Citric acid          | △                 | ○               |       | △        | ○             |   |
|                | Cresol acid          | ○                 | ○               | ○     | △        | ○             |   |
|                | D                    | Diesel fuel       | ○               | ○     | ○        | ○             | △ |
|                |                      | Dowtherm          |                 | ○     |          |               |   |
| Drinking water |                      | △                 | ○               |       |          | ○             |   |
| E              | Ethanol              | ○                 | ○               | ○     | ○        | ○             |   |
|                | Ether                | ○                 | ○               | ○     | ○        | △             |   |
|                | Ethyl acetate        | ○                 | △               | △     | △        | △             |   |
|                | Ethylene chloride    |                   |                 |       |          |               |   |
|                | Ethylene glycol      | ○                 | ○               | ○     | ○        | ○             |   |
| F              | Fatty acid           | △                 | ○               |       |          | ×             |   |
|                | Ferric chloride      | ×                 | ×               |       | ×        | ○             |   |
|                | Ferric sulfate       | ×                 | △               |       |          | ○             |   |
|                | Formaldehyde 40%     | △                 | ○               |       | △        | ○             |   |
|                | Formic acid          | ×                 | ○               |       | ×        | ○             |   |
|                | Freon                | ○                 | ○               | ○     | ○        | ×             |   |

|                   | Fluids                        | Brass            | Stainless Steel | Steel | Aluminum | Polypropylene |
|-------------------|-------------------------------|------------------|-----------------|-------|----------|---------------|
| G                 | Glycerine                     | ○                | ○               | ○     | ○        | ○             |
|                   | H                             | Hexane           | ○               | ○     |          | ○             |
| Hydrobromic acid  |                               |                  | ×               |       | ×        | ○             |
| Hydrochloric acid |                               | ×                | ×               | ×     | ×        | ○             |
| Hydrofluoric acid |                               | △                | ×               |       | ×        | ○             |
| Hydrogen          |                               | ○                | ○               | ○     | ○        | ○             |
| Hydrogen peroxide |                               | ×                | ○               |       |          | ○             |
| Hydrogen sulfide  |                               | △                | △               |       |          | ○             |
| I                 |                               | Industrial water | ○               | ○     | △        |               |
|                   | J                             | Jet fuel         |                 | ○     | △        |               |
| L                 |                               | Lactic acid      | ×               | ○     |          | ×             |
|                   | Liquefied petroleum gas (LPG) | ○                | ○               | ○     | ○        | ○             |
| M                 | Magnesium chloride            | ×                | ×               |       | △        | ○             |
|                   | Mercury                       | ×                | ○               | ○     |          | ○             |
|                   | Methyl alcohol                | ○                | ○               | ○     | ○        | ○             |
| N                 | Naphtha                       | ○                | ○               | ○     | ○        | △             |
|                   | Naphthalene                   | ○                | ○               | ○     | ○        | ○             |
|                   | Natural gas                   | ○                | ○               | ○     | ○        | ○             |
|                   | Nickel chloride               | ×                | ×               |       |          | ○             |
|                   | Nitric acid                   | ×                | △               |       | ×        | △             |
|                   | Nitrobenzene                  | △                | ○               | ○     |          | ×             |
| O                 | Octane                        |                  |                 |       |          |               |
|                   | Oxygen                        | ○                | ○               | ○     |          | ○             |
| P                 | Paraffin                      | ○                | ○               | ○     |          |               |
|                   | Phenol                        | △                | ○               |       |          | ○             |
|                   | Phosphoric acid               | ×                | ○               |       | ×        | ○             |
|                   | Potassium chloride            | △                | △               |       | ×        | ○             |
|                   | Potassium hydroxide           | △                | ○               |       | ×        | ○             |
|                   | Pure water                    | △                | ○               |       |          | ○             |
|                   | R                             | Refined gasoline | ○               | ○     | ○        | ○             |
| Refined petroleum |                               | ○                | ○               | ○     | ○        | ○             |
| S                 | Salt water                    | ×                | △               | ×     | ×        | ○             |
|                   | Sodium carbonate              | ○                | ○               | ○     | △        | ○             |
|                   | Sodium chloride               | △                | △               | ×     | ×        | ○             |
|                   | Sodium hydroxide              |                  | ○               |       | ×        | △             |
|                   | Sodium nitrate                | △                | ○               | ○     |          | ○             |
|                   | Sodium phosphate              |                  | △               |       |          | ○             |
|                   | Sodium sulfate                | ○                | ○               | ○     | ○        | ○             |
| Sulfuric acid     | Sulfuric acid                 | ×                | ×               | ×     | ×        | △             |
|                   | Sulfurous acid                | ×                | △               |       |          | ○             |
| T                 | Tannic acid                   | ×                | ○               |       |          | ○             |
| W                 | Wine                          | ○                | ○               |       | ○        | ○             |
| Z                 | Zinc chloride                 | ×                | △               |       | △        | ○             |

Notes: 1. Since fluid concentration (%) and conditions of use may affect the performance, detailed study is necessary when choosing materials.

Notes: 2. For the cells that have no symbol marks, please consult us for appropriate body material.

# Unit Conversion Tables

## Length

| m                        | cm                  | in                       | ft                       | yd                       | km     | mile                     | n-mile                   |
|--------------------------|---------------------|--------------------------|--------------------------|--------------------------|--------|--------------------------|--------------------------|
| 1                        | 1 x 10 <sup>2</sup> | 3.937 x 10               | 3.281                    | 1.094                    | 1      | 6.214 x 10 <sup>-1</sup> | 5.400 x 10 <sup>-1</sup> |
| 1 x 10 <sup>-2</sup>     | 1                   | 3.937 x 10 <sup>-1</sup> | 3.281 x 10 <sup>-2</sup> | 1.094 x 10 <sup>-2</sup> | 1.6093 | 1                        | 8.690 x 10 <sup>-1</sup> |
| 2.54 x 10 <sup>-2</sup>  | 2.540               | 1                        | 8.333 x 10 <sup>-2</sup> | 2.778 x 10 <sup>-2</sup> | 1.852  | 1.151                    | 1                        |
| 3.048 x 10 <sup>-1</sup> | 3.048 x 10          | 1.2 x 10                 | 1                        | 3.333 x 10 <sup>-1</sup> |        |                          |                          |
| 9.144 x 10 <sup>-1</sup> | 9.144 x 10          | 3.9 x 10                 | 3                        | 1                        |        |                          |                          |

## Area

| m <sup>2</sup>           | in <sup>2</sup>         | ft <sup>2</sup>          | yd <sup>2</sup>          | km <sup>2</sup>          | acre                    | mile <sup>2</sup>        | ha                       |
|--------------------------|-------------------------|--------------------------|--------------------------|--------------------------|-------------------------|--------------------------|--------------------------|
| 1                        | 1.550 x 10 <sup>3</sup> | 1.076 x 10               | 1.196                    | 1                        | 2.471 x 10 <sup>2</sup> | 3.861 x 10 <sup>-1</sup> | 1.00 x 10 <sup>2</sup>   |
| 6.452 x 10 <sup>-4</sup> | 1                       | 6.944 x 10 <sup>-3</sup> | 7.716 x 10 <sup>-4</sup> | 4.046 x 10 <sup>-3</sup> | 1                       | 1.562 x 10 <sup>-3</sup> | 4.047 x 10 <sup>-2</sup> |
| 9.290 x 10 <sup>-2</sup> | 1.44 x 10 <sup>2</sup>  | 1                        | 1.111 x 10 <sup>-1</sup> | 2.590                    | 6.40 x 10 <sup>2</sup>  | 1                        | 2.590 x 10 <sup>2</sup>  |
| 8.361 x 10 <sup>-1</sup> | 1.296 x 10 <sup>3</sup> | 9                        | 1                        | 1 x 10 <sup>-2</sup>     | 2.471                   | 3.861 x 10 <sup>-3</sup> | 1                        |

## Mass (Weight)

| kg                       | gr                       | oz                       | lb                       | t<br>(metric ton)        | ltn<br>(long ton)        | stn<br>(short ton)       |
|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| 1                        | 1.5432 x 10 <sup>4</sup> | 3.527 x 10               | 2.205                    | 1 x 10 <sup>-3</sup>     | 9.842 x 10 <sup>-4</sup> | 1.102 x 10 <sup>-3</sup> |
| 6.480 x 10 <sup>-5</sup> | 1                        | 2.286 x 10 <sup>-3</sup> | 1.429 x 10 <sup>-4</sup> | 6.480 x 10 <sup>-8</sup> | 6.328 x 10 <sup>-8</sup> | 7.143 x 10 <sup>-8</sup> |
| 2.835 x 10 <sup>-2</sup> | 4.375 x 10 <sup>2</sup>  | 1                        | 6.25 x 10 <sup>-2</sup>  | 2.835 x 10 <sup>-5</sup> | 2.790 x 10 <sup>-5</sup> | 3.125 x 10 <sup>-5</sup> |
| 4.536 x 10 <sup>-1</sup> | 7.000 x 10 <sup>3</sup>  | 1.6 x 10                 | 1                        | 4.536 x 10 <sup>-4</sup> | 4.464 x 10 <sup>-4</sup> | 5 x 10 <sup>-4</sup>     |
| 1.000 x 10 <sup>3</sup>  | 1.543 x 10 <sup>7</sup>  | 3.5274 x 10 <sup>4</sup> | 2.205 x 10 <sup>3</sup>  | 1                        | 9.842 x 10 <sup>-1</sup> | 1.102                    |
| 1.016 x 10 <sup>3</sup>  | 1.568 x 10 <sup>7</sup>  | 3.5840 x 10 <sup>4</sup> | 2.240 x 10 <sup>3</sup>  | 1.016                    | 1                        | 1.12                     |
| 9.072 x 10 <sup>2</sup>  | 1.4 x 10 <sup>7</sup>    | 3.2000 x 10 <sup>4</sup> | 2.000 x 10 <sup>3</sup>  | 9.072 x 10 <sup>-1</sup> | 8.929 x 10 <sup>-1</sup> | 1                        |

## Force

| N                        | kgf                      | lbf                      | pdl        |
|--------------------------|--------------------------|--------------------------|------------|
| 1                        | 1.020 x 10 <sup>-1</sup> | 2.248 x 10 <sup>-1</sup> | 7.233      |
| 9.807                    | 1                        | 2.205                    | 7.093 x 10 |
| 4.448                    | 4.536 x 10 <sup>-1</sup> | 1                        | 3.217 x 10 |
| 1.383 x 10 <sup>-1</sup> | 1.410 x 10 <sup>-2</sup> | 3.108 x 10 <sup>-2</sup> | 1          |

## Pressure

| MPa                       | kgf/cm <sup>2</sup>      | lbf/in <sup>2</sup> (PSI) | atm                      | mmHg                     | inHg                     | mmH <sub>2</sub> O        | ftH <sub>2</sub> O       |
|---------------------------|--------------------------|---------------------------|--------------------------|--------------------------|--------------------------|---------------------------|--------------------------|
| 1                         | 1.020 x 10               | 1.450 x 10 <sup>2</sup>   | 9.869                    | 7.501 x 10 <sup>3</sup>  | 2.953 x 10 <sup>2</sup>  | 1.01972 x 10 <sup>5</sup> | 3.346 x 10 <sup>2</sup>  |
| 9.807 x 10 <sup>-2</sup>  | 1                        | 1.422 x 10                | 9.678 x 10 <sup>-1</sup> | 7.356 x 10 <sup>2</sup>  | 2.896 x 10               | 1.0000 x 10 <sup>4</sup>  | 3.281 x 10               |
| 6.895 x 10 <sup>-3</sup>  | 7.031 x 10 <sup>-2</sup> | 1                         | 6.805 x 10 <sup>-2</sup> | 5.172 x 10               | 2.036                    | 7.031 x 10 <sup>2</sup>   | 2.307                    |
| 1.013 x 10 <sup>-1</sup>  | 1.033                    | 1.470 x 10                | 1                        | 7.60 x 10 <sup>2</sup>   | 2.992 x 10               | 1.0332 x 10 <sup>4</sup>  | 3.390 x 10               |
| 1.333 x 10 <sup>-4</sup>  | 1.360 x 10 <sup>-3</sup> | 1.934 x 10 <sup>-2</sup>  | 1.316 x 10 <sup>-3</sup> | 1                        | 3.937 x 10 <sup>-2</sup> | 1.360 x 10                | 4.460 x 10 <sup>-2</sup> |
| 3.386 x 10 <sup>-3</sup>  | 3.453 x 10 <sup>-2</sup> | 4.912 x 10 <sup>-1</sup>  | 3.342 x 10 <sup>-2</sup> | 2.54 x 10                | 1                        | 3.453 x 10 <sup>2</sup>   | 1.133                    |
| 9.806 x 10 <sup>-6</sup>  | 1 x 10 <sup>-4</sup>     | 1.422 x 10 <sup>-3</sup>  | 9.678 x 10 <sup>-5</sup> | 7.356 x 10 <sup>-2</sup> | 2.896 x 10 <sup>-3</sup> | 1                         | 3.281 x 10 <sup>-3</sup> |
| 2.2989 x 10 <sup>-2</sup> | 3.048 x 10 <sup>-2</sup> | 4.335 x 10 <sup>-1</sup>  | 2.950 x 10 <sup>-2</sup> | 2.242 x 10               | 8.827 x 10 <sup>-1</sup> | 3.048 x 10 <sup>2</sup>   | 1                        |

# Cupla Inquiry Form

If you are unable to find a Cupla that you are looking for, or the type that suits your particular requirements in this catalog, please fill in this form and fax it to our distributor in your country or directly to us. We will select the most suitable Cupla for your applications and contact you directly or through our distributor.

## FAX Sheet

To Nitto Kohki Co., Ltd.

|                      |  |                  |  |
|----------------------|--|------------------|--|
| Company Name         |  | Factory / Branch |  |
| Department / Section |  | Full Name        |  |
| Address              |  | TEL              |  |
| E-mail               |  | FAX              |  |

## Cupla Usage Conditions

|                    |   |                                    |  |
|--------------------|---|------------------------------------|--|
| Application        | (Product / Machinery) Name ( )  | Quantity to Be Used                | ( ) pieces                                 |
| Size               | ( ) Standard or Code to be conformed with, if any ( )   | Location                           | Indoors • Outdoors                         |
| Product Name       | Hi Cupla • Super Cupla • Molding Cupla • SP Cupla Type A • HSP • 350 • TSP • Mini Cupla • Others ( )  |                                    |  |
| Body Material      | ( )   | Seal Material                      | ( )  |
| Surface Treatment  | ( )   | Connection Disconnection Frequency | ( ) times / day • ( ) times / month        |
| Valve              | Socket ( with • without ) Plug ( with • without )   |                                    |  |
| Fluid              | Air • Water • Oil • Steam (Others: )  |                                    |  |
| Pressure           | Maximum ( ) MPa   | Normal ( ) MPa                     | Minimum ( ) MPa Impulse ( with • without ) |
| Maximum Flow       | ( ) L/min   |                                    |  |
| Vacuum             | ( ) kPa   |                                    |  |
| Temperature        | Maximum ( ) °C  | Normal ( ) °C                      | Minimum ( ) °C                             |
| Type of Thread     | 1. Unified Thread<br>2. Male Thread<br>3. Female Thread<br>4. Special thread / hose barb<br>Standard or Code to be conformed with, if any ( ) |                                    |  |
| Other Requirements |   |                                    |  |

• Please do not write in the following section.


|            |               |  |                   |  |             |  |  |  |
|------------|---------------|--|-------------------|--|-------------|--|--|--|
| Processing | Model         |  | Seal Material     |  | Drawing No. |  |  |  |
|            | Body Material |  | Surface Treatment |  |             |  |  |  |
|            |               |  |                   |  |             |  |  |  |

Please make your blank copy of this form to fill in.

This Japanese Industrial Standard specifies taper pipe threads and is applicable to the threads used mainly for pressure-tight joints on the threads for joining pipes, pipe fittings, fluid machinery, etc.

## Attached Table: Basic Profiles, Basic Dimensions and Tolerance

Basic Profile Applied for Taper External and Taper Internal Threads

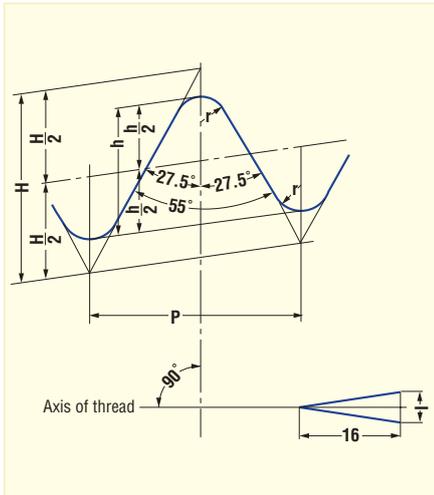

Thick continuous line shows basic profile.


$$P = \frac{25.4}{n}$$

$$H = 0.960237 P$$

$$h = 0.640327 P$$

$$r = 0.137278 P$$

Basic Profile Applied for Parallel Internal Threads

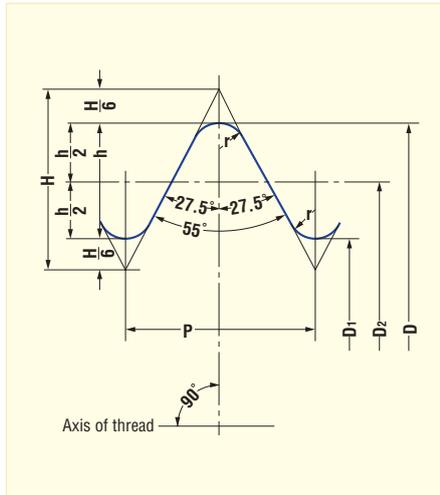


Thick continuous line shows basic profile.

$$P = \frac{25.4}{n}$$

$$H = 0.960491 P$$

$$h = 0.640327 P$$

$$r = 0.137329 P$$

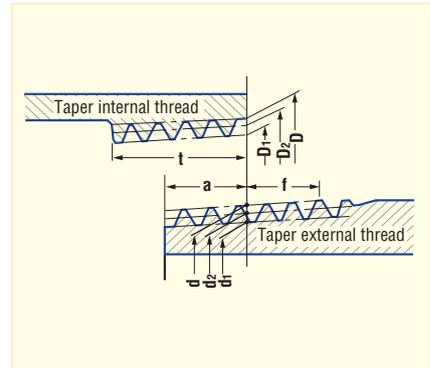

How to symbolize taper pipe threads:

|                       |               |
|-----------------------|---------------|
| Taper external thread | <b>R 3/8</b>  |
| Taper internal thread | <b>Rc 3/8</b> |

Unit: mm

| Designation of thread | Thread                             |                                 |                      |                    | Gauge dia.      |                  |                  | Position of gauge plane |                 |  | Tolerance on $D$ , $D_2$ and $D_1$ of parallel internal thread $\pm$ | Length of useful thread (min.)                          |   |      |            | Size of carbon steel pipe for ordinary piping (Given for reference) |     |
|-----------------------|------------------------------------|---------------------------------|----------------------|--------------------|-----------------|------------------|------------------|-------------------------|-----------------|--|--|---|---|------|------------|---|-----|
|                       | Number of threads (in 25.4 mm) $n$ | Pitch $P$ (Given for reference) | Height of thread $h$ | Radius $r$ or $r'$ | External thread |                  |                  | External thread         | Internal thread |  |  | From position of gauge plane toward larger dia. end $f$ | Internal thread                         |      | Outer dia. | Thickness   |     |
|                       |                                    |                                 |                      |                    | Major dia. $d$  | Pitch dia. $d_2$ | Minor dia. $d_1$ | From pipe end           | At pipe end     | When there is incomplete thread part                     |  |   |   |      |            |   |     |
|                       |                                    |                                 |                      |                    |                 |                  |                  |                         |                 | From position of gauge plane toward smaller dia. end $l$ |  |   | When there is no incomplete thread part |      |            |   |     |
| R 1/8                 | 28                                 | 0.9071                          | 0.581                | 0.12               | 9.728           | 9.147            | 8.566            | 3.97                    | 0.91            | 1.13   | 0.071  | 2.5   | 6.2                                     | 7.4  | 4.4        | 10.5  | 2.0 |
| R 1/4                 | 19                                 | 1.3368                          | 0.856                | 0.18               | 13.157          | 12.301           | 11.445           | 6.01                    | 1.34            | 1.67   | 0.104  | 3.7   | 9.4                                     | 11.0 | 6.7        | 13.8  | 2.3 |
| R 3/8                 | 19                                 | 1.3368                          | 0.856                | 0.18               | 16.662          | 15.806           | 14.950           | 6.35                    | 1.34            | 1.67   | 0.104  | 3.7   | 9.7                                     | 11.4 | 7.0        | 17.3  | 2.3 |
| R 1/2                 | 14                                 | 1.8143                          | 1.162                | 0.25               | 20.955          | 19.793           | 18.631           | 8.16                    | 1.81            | 2.27   | 0.142  | 5.0   | 12.7                                    | 15.0 | 9.1        | 21.7  | 2.8 |
| R 3/4                 | 14                                 | 1.8143                          | 1.162                | 0.25               | 26.441          | 25.279           | 24.117           | 9.53                    | 1.81            | 2.27   | 0.142  | 5.0   | 14.1                                    | 16.3 | 10.2       | 27.2  | 2.8 |
| R 1                   | 11                                 | 2.3091                          | 1.479                | 0.32               | 33.249          | 31.770           | 30.291           | 10.39                   | 2.31            | 2.89   | 0.181  | 6.4   | 16.2                                    | 19.1 | 11.6       | 34.0  | 3.2 |
| R 1-1/4               | 11                                 | 2.3091                          | 1.479                | 0.32               | 41.910          | 40.431           | 38.952           | 12.70                   | 2.31            | 2.89   | 0.181  | 6.4   | 18.5                                    | 21.4 | 13.4       | 42.7  | 3.5 |
| R 1-1/2               | 11                                 | 2.3091                          | 1.479                | 0.32               | 47.803          | 46.324           | 44.845           | 12.70                   | 2.31            | 2.89   | 0.181  | 6.4   | 18.5                                    | 21.4 | 13.4       | 48.6  | 3.5 |
| R 2                   | 11                                 | 2.3091                          | 1.479                | 0.32               | 59.614          | 58.135           | 56.656           | 15.88                   | 2.31            | 2.89   | 0.181  | 7.5   | 22.8                                    | 25.7 | 16.9       | 60.5  | 3.8 |
| R 2-1/2               | 11                                 | 2.3091                          | 1.479                | 0.32               | 75.184          | 73.705           | 72.226           | 17.46                   | 3.46            | 3.46   | 0.216  | 9.2   | 26.7                                    | 30.1 | 18.6       | 76.3  | 4.2 |
| R 3                   | 11                                 | 2.3091                          | 1.479                | 0.32               | 87.884          | 86.405           | 84.926           | 20.64                   | 3.46            | 3.46   | 0.216  | 9.2   | 29.8                                    | 33.3 | 21.1       | 89.1  | 4.2 |
| R 4                   | 11                                 | 2.3091                          | 1.479                | 0.32               | 113.030         | 111.551          | 110.072          | 25.40                   | 3.46            | 3.46   | 0.216  | 10.4  | 35.8                                    | 39.3 | 25.9       | 114.3   | 4.5 |
| R 5                   | 11                                 | 2.3091                          | 1.479                | 0.32               | 138.430         | 136.951          | 135.472          | 28.58                   | 3.46            | 3.46   | 0.216  | 11.5  | 40.1                                    | 43.5 | 29.3       | 139.8   | 4.5 |
| R 6                   | 11                                 | 2.3091                          | 1.479                | 0.32               | 163.830         | 162.351          | 160.872          | 28.58                   | 3.46            | 3.46   | 0.216  | 11.5  | 40.1                                    | 43.5 | 29.3       | 165.2   | 5.0 |

# Hi Cupla Series Interchangeability

Following Plugs and Sockets Can Be Connected with Each Other

| Plug                        |   |  |
|-----------------------------|---|--|
| Type                        | Model   |  |
| Hi Cupla                    | 17PH, 20PH, 30PH, 40PH<br>10PM, 20PM, 30PM, 40PM<br>20PF, 30PF, 40PF<br>20PFF<br>60PC, 80PC, 100PC<br>90PN-BH |  |
|                             | Anti-vibration Plug Hose  | SHA-3-2R, SHA-3-3R   |
|                             | Nut Cupla   | 50PN (10PAH), 60PN (20PAH), 65PN<br>80PN (30PAH), 110PN (40PAH)<br>50PNG, 65PNG, 85PNG   |
|                             | Hi Cupla Ace  | 20PH-PLA, 30PH-PLA<br>20PM-PLA, 30PM-PLA<br>50PN-PLA, 60PN-PLA, 65PN-PLA, 80PN-PLA, 85PN-PLA<br>20PFF-PLA<br>50PNG-PLA, 65PNG-PLA, 85PNG-PLA |
|                             | Rotary Plug   | RL-20PM, RL-30PM<br>RL-20PFF   |
| Twist Plug                  | TS-10PM, TS-20PM, TS-30PM<br>TS-20PFF   |  |
| Purge Plug                  | PV-20PH, PV-30PH, PV-40PH<br>PV-65PN, PV-85PN   |  |
| NK Cupla Hose               | NKU-605B, NKU-610B, NKU-620B (HA-65PNG)   |  |
|                             | NKU-810B, NKU-820B (HA-85PNG)   |  |
| Nk Cupla Coil Hose          | NKC-503B, NKC-505B (HA-50PNG)<br>NKC-603B, NKC-605B (HA-65PNG)  |  |
| Rotary Line Cupla           | RT Type (Inlet Port)  |  |
| Line Cupla 200              | 200T Type (Inlet Port)  |  |
| Rotary Full-Blow Line Cupla | FBH-RT Type (Inlet Port)  |  |
| Hi Cupla Ace                | HA-T Type (Inlet Port)  |  |

Can be connected with each other

| Socket  |   |
|---|---|
| Model   | Type  |
| 17SH, 20SH, 30SH, 40SH<br>10SM, 20SM, 30SM, 40SM<br>20SF, 30SF, 40SF<br>90SN-BH   | Hi Cupla                                      |
| 20SH-BL, 30SH-BL, 40SH-BL<br>20SM-BL, 30SM-BL, 40SM-BL<br>20SF-BL, 30SF-BL, 40SF-BL<br>65SN-BL, 80SN-BL, 85SN-BL                        | Hi Cupla BL                                   |
| TW20SH, TW30SH, TW40SH<br>TW20SM, TW30SM, TW40SM<br>TW20SF, TW30SF, TW40SF  | Hi Cupla TW Type                              |
| 200-17SH, 200-20SH, 200-30SH, 200-40SH<br>200-20SM, 200-30SM, 200-40SM<br>200-20SF, 200-30SF, 200-40SF<br>200-60SC, 200-80SC, 200-100SC | Hi Cupla 200                                  |
| FBH-20SH, FBH-30SH, FBH-40SH<br>FBH-20SM, FBH-30SM, FBH-40SM<br>FBH-20SF, FBH-30SF, FBH-40SF<br>FBH-65SN, FBH-80SN, FBH-85SN, FBH-110SN | Full-Blow Cupla                               |
| 50SN (10SAH), 60SN (20SAH), 65SN<br>80SN (30SAH), 85SN, 110SN (40SAH)   | Nut Cupla                                     |
| 200-50SN, 200-60SN, 200-65SN, 200-80SN<br>200-85SN, 200-110SN<br>200-50SNG, 200-65SNG, 200-85SNG  | Nut Cupla 200                                 |
| 65SNR, 85SNR<br>65SNRG, 85SNRG  | Rotary Nut Cupla                              |
| DCS-20PH, DCS-30PH, DCS-40PH<br>DCS-65PNG, DCS-85PNG  | Duster Cupla                                  |
| L200-20SH, L200-30SH, L200-40SH<br>L200-20SM, L200-30SM, L200-40SM<br>L200-20SF, L200-30SF, L200-40SF<br>L200-65SNRG, L200-85SNRG       | Lock Cupla 200                                |
| PV-20SM, PV-30SM, PV-40SM<br>RT Type, RE Type   | Purge Hi Cupla<br>Rotary Line Cupla           |
| 200T Type, 200L Type, 200S Type<br>FBH-RE Type, FBH-RT Type   | Line Cupla 200<br>Rotary Full-Blow Line Cupla |
| HA-20SH, HA-30SH<br>HA-20SM, HA-30SM, HA-50SN, HA-60SN<br>HA-65SN, HA-80SN, HA-85SN<br>HA-T<br>HA-50SNG, HA-65SNG, HA-85SNG             | Hi Cupla Ace                                  |
| NKU-605B, NKU-610B, NKU-620B (HA-65SNG)<br>NKU-810B, NKU-820B (HA-85SNG)  | NK Cupla Hose                                 |
| NKC-503B, NKC-505B (HA-50SNG)<br>NKC-603B, NKC-605B (HA-65SNG)  | NK Cupla Coil Hose                            |

| Plug     |   |  |
|----------|---|--|
| Type     | Model   |  |
| Hi Cupla | 400PH, 600PH, 800PH<br>400PM, 600PM, 800PM<br>400PF, 600PF, 800PF |  |
|          | Line Cupla 200  | 200L Type (Inlet Port)<br>200S Type (Inlet Port) |

Can be connected with each other

| Socket  |   |
|---|---|
| Model   | Type                                      |
| 400SH, 600SH, 800SH<br>400SM, 600SM, 400SF<br>800SM, 600SF, 800SF   | Hi Cupla                                  |
| PV-400SM, PV-600SM<br>PVR-400SH, PVR-600SH, PVR-800SH<br>PVR-400SM, PVR-600SM, PVR-800SM<br>PVR-400SF, PVR-600SF, PVR-800SF | Purge Hi Cupla<br>Purge Hi Cupla PVR Type |

# Production Facilities That Assure Our Product Quality

Large scale production facilities in Tochigi Prefecture, Japan and Ayutthaya, Thailand, having the capability of flexible mass production, are in full operation around the clock and constitute a complete high-grade supply system, from the machining of components to the assembly and testing of finished products, that is forever ready and able to respond to our user's reliance.

## Production Facilities Assure Flexible Supply System

### **TOCHIGI NITTO KOHKI CO., LTD.**

Production of Cuplas, Linear-Motor-Driven Piston Pumps and their Applied Products



**Tochigi Nitto Kohki factory is accredited under ISO 14001 & 9001.**

In November 1995, the Japan Quality Assurance Foundation, authority for inspection and registration, awarded Tochigi Nitto Kohki "ISO 9001" for quality control and quality assurance in the manufacture of Cupla products (Quick connect couplings) as well as 1kW or smaller Linear Drive air compressors, vacuum pumps and applied products, and in November 2001 "ISO 14001", also awarded International Standard for environment management systems intended to perform global environment preservation and pollution control.

### **NITTO KOHKI INDUSTRY (THAILAND) CO., LTD.**

Production of Cuplas, Air Compressors, and Vacuum Pumps



**ISO 14001 & 9001**



NITTO KOHKI INDUSTRY (THAILAND) CO., LTD. factory is accredited under ISO 14000 and ISO 9001.

# From Development to Production, Management and Marketing of “Cuplas”

Nitto Kohki has introduced the “integrated product assurance system” that can respond promptly to “users’ requirements” by covering the range of development, quality control, production and marketing in order to ensure supply of high-performance high-quality “Cuplas”.

## Nitto Kohki’s Integrated Product Assurance System

### Research and Development

The needs of the time and the latest information are gathered and analyzed, and unique technology is utilized to the challenge for ceaseless development of better Cuplas, Cuplas that suggest new applications.




Headquarters and R & D Laboratory



### Quality Control

The careful selection of materials, painstaking pursuit of machining precision, and strict surveillance processes such as severe endurance tests have earned trust for our Cuplas as a global brand.

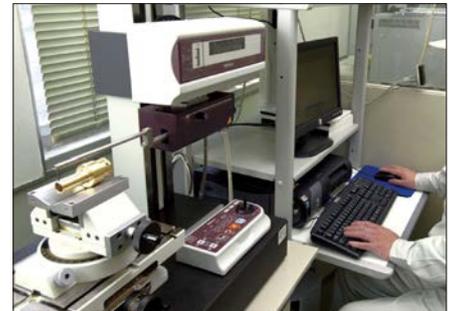

### Production


High-grade, rationalized, and integrated production system extends from the machining of parts to the assembly and testing of completed products. Robots that we make ourselves for our own plants and many other state-of-the-art facilities that cannot be seen elsewhere have marvelous capacity for mass production. And with them all, we aim to be an establishment of a flexible supply system.

*Tochigi Nitto Kohki factory is accredited under ISO 14001 & 9001.*



### Marketing

Meticulous marketing activities include advertising in the general industrial press and specialist papers, national and local exhibitions, training sessions, catalogs, promotion videos, other presentation tools and technical data sheets for new launches, and unique yet dynamic campaigns, etc.

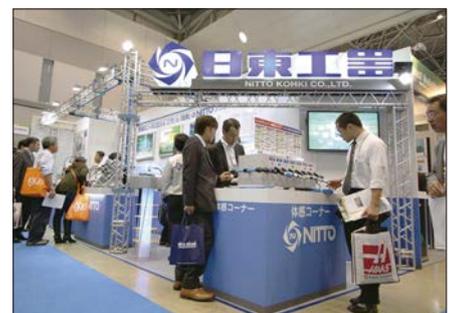

# Nitto Kohki's Laborsaving Products

Nitto Kohki is capturing the needs of users by introducing to the world not only "Cuplas" quick connect couplings, but also next-generation laborsaving devices, including various "machine tools and hand tools", high precision "Delvo" electric screwdrivers, and linear-motor-driven piston "compressors/vacuum pumps".

## Nitto Kohki's Quality Products

### Machines and Tools



#### Machines and Tools to Achieve Energy and Labor Savings in Processing Work

Machines and tools are used at various processing sites for such work as cutting, polishing, scaling, drilling and chamfering of steel materials. We have created a product line up of pneumatic, electric and hydraulic machines and tools to match the diversification of processing modes and the conditions of work operations.



#### High Precision "Delvo" Electric Screwdrivers for Professional Use

NITTO KOHKI "delvo" Electric Screwdrivers are high-quality tools for professional use, with special emphasis on precise control of torque and long life. They apply just the correct amount of torque—with sure, positive control always at your fingertips. They are smooth and shockless in operation, too.



#### Compressors, Vacuum Pumps and Their Applied Products

MEDO pumps are unique products featuring a linear-motor-driven free piston system. NITTO KOHKI has made available a complete series of air compressors and suction pumps that incorporate this uniquely functional design. These are quite appropriate as air sources or suction power units for various pneumatically operated equipment and apparatus in advanced industries.

# Safety Guide

## Safety Precautions

The safety precautions provide instructions for the safe use of Nitto Cuplas to avoid the potential danger of bodily harm or damage to surrounding property. The safety precautions are categorized under the headings Danger, Warning and Caution, in accordance with the degree of potential hazard to the body or surrounding property, if the Cuplas are used incorrectly.

They are all important notes for safety and must be followed as well as in accordance with International standards #1 and other local safety regulations #2.

#1: ISO 4413, Hydraulic Fluid Power – General rules relating to systems    ISO 4414, Pneumatic Fluid Power – General rules relating to systems

#2: Industrial Health & Safety law (for example)

### **DANGER**

Indicates an imminently hazardous situation which, if not avoided, will result in death or serious injury.

### **DANGER**

Stop using the Cupla immediately if there is any anticipated danger of operation or reduced safety.

### **WARNING**

Indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury.

### **WARNING**

The enclosed safety precautions are only a guideline. When using Nitto Cuplas, you are requested to pay particular attention to possible hazardous situations for the application which are not stated in the safety precautions.

### **CAUTION**

Indicates a potentially hazardous situation which, if not avoided, may result in personal injury or property damage.

## Caution When Selecting Cuplas

### **DANGER**

- Connection to a coupling of another brand may cause imperfect connection or disconnection, reduced air tightness, impaired pressure resistance or durability, reduced flow rate and potentially result in an unexpected accident and therefore must be avoided. Nitto Kohki cannot accept liability for any accident that may result by mixed use with the coupling of another brand. Please be sure to check for our marks on the right hand side of this page, which are always inscribed on Nitto Kohki Cupla products, when you order and purchase.
- Do not use Cuplas under conditions and environments other than specified in the catalog.

### **WARNING**

- Please consult us prior to use if Cuplas are required for use on machines, equipment or systems (hereafter referred to as “equipment, systems, etc.”) for sustaining or controlling human life or body.
- When Cuplas are used for the purpose of ensuring safety, please consult us beforehand.
- The compatibility of the product with specific equipment, systems, etc. must be determined by the person designing the equipment, systems, etc. or the person who decides its specifications based on necessary analysis and test result. The expected performance and safety assurance of the equipment, systems, etc. will be the responsibility of the person who has determined its compatibility with the product.
- If Cuplas are to be used for the following applications, please consult us:
  - Vehicles, aircraft and associated equipment systems that accommodate people
  - Medical facilities or suction equipment that directly affects human body
  - Equipment that directly comes into contact with and runs food, drugs or medicines, drinking water, atomic energy equipment or equipment that ensures safety.
- Selecting the wrong type of seal material may cause a leak. In making your selection, please check the compatibility of the seal material with the type of fluid and temperature used in the application.
- Please consult us prior to selection or use of Cuplas when they are intended for use with corrosive or flammable gases/liquids and/or in atmospheres of these types of gases and liquids.

## Warranty and Disclaimer

Our responsibilities for the defects in our products shall be as follows:

- We shall be responsible for any defects in design, material or workmanship of our products, if it is apparent that such defects are due to reasons solely attributable to us.
- Our responsibilities shall be limited to one of the following, as determined by us:
  - (a) repair of any defective products or parts thereof,
  - (b) replacement of any defective products or parts thereof; or
  - (c) compensation for loss and damages incurred by you, which shall in no case exceed the amount of your purchase price for the defective products.
- We shall in no case be liable for any special, indirect or consequential loss or damages, whether such loss or damages are those arising from work stoppage, impairment of other goods or death or personal injury.

## Performance, Dimensions and Its Limitation

Please note the performance charts and outside dimensions in this catalog do not take into account any tolerances found in mass production. The information is an average, to be a guide for selecting models and to enable technical appraisal by users.

## Beware of Imitations

Recently, similar products which invite misidentification or confusion with Nitto Kohki Cuplas have appeared on the market.

Connection with such a similar product to a Nitto Kohki Cupla may cause:

1. Imperfect connection or disconnection
2. Reduced air tightness
3. Impaired pressure resistance or durability
4. Reduced flow rate

and could result in unexpected accidents.

Therefore, connection other than with a Nitto Kohki Cupla must be avoided.

Please be sure to check for our original marks on the right hand side of this page, which are always inscribed on Nitto Kohki Cupla products, when you order and purchase.

**Note: Nitto Kohki cannot accept any liability for any accident that may occur as a result of using couplings of another brand in conjunction with our own.**

### Markings



# Safety Guide

The following precautions must be taken when using Cuplas. Please contact Nitto Kohki or the outlet/supplier where you purchased the product with regard to repair procedures, certification on the specification or applications of the products.



## Precautions Relating to the Use of All Cuplas

- Be sure to read the "Instruction Sheet" that comes with the product or "Caution" on the package before use.

### Cuplas for Low Pressure (Air)

#### ⚠ Caution

- Only use Cuplas as quick connecting fluid couplings.
- The fluid to be used must be compatible with the body and seal material of Cupla.
- Only use Cuplas with a combination of Nitto Cuplas.
- Do not use Cuplas continuously exceeding the rated working pressure.
- Only use Cuplas within the range of the rated temperature. Otherwise the seal may get damaged or deteriorate and cause leakage.
- Do not apply any excessive impact, bend or tension more than is necessary to connect or disconnect Cuplas. It may cause leakage or damage.
- Do not use Cuplas in a place where dust or metal dust gets in. It may cause malfunction or leakage.
- May cause malfunction or leakage if paint sticks to Cuplas.
- Do not disassemble Cuplas.
- Disconnect the Cupla plug and socket while holding the plug in one hand and the socket in the other.
- After connection, try to pull the Cupla plug and socket apart to check secure connection.
- Selecting the wrong type of seal material may cause leakage. In making your selection, check the compatibility of seal and body material with the type of fluid and temperature. As to the use of any special paint or solvent, make thoroughly sure of the material compatibility.
- In cleaning Cuplas, do so in a manner that will not affect the seal and body material of Cuplas. (Before cleaning, consult us.)
- Do not drop Cuplas. It may reduce the performance of the Cuplas.
- Do not connect Cuplas directly to a vibrating or impact device. It may result in reduced lifetime.
- Do not use Cuplas continuously at the lowest or highest working temperature.
- Do not exceed the recommended maximum torque when screwing in to the male or female thread of a Cupla for installation. It may cause thread damage.
- Do not apply any excessive bending, tension or rotation to Cuplas. It may cause leakage or damage.
- Dirt, scratches or damages on the sealing surface may cause leakage.
- The inclusion of foreign matter in the fluid to be used may cause malfunction. Fluid must be cleaned through filters before reaching to Cuplas.
- Do not strike the tip of an automatic shut-off valve with a hammer or a similar tool. It may cause leakage or malfunction. Consult us for an alternative way of releasing the residual pressure.
- Put a Nitto genuine dust cap on the plug after disconnection when there is a possibility of dirt sticking to the plug seal surface.

### Cautions on Handling Cupla Hose

#### ⚠ Caution

- Make sure that there is no twist or bend on the hose before use.
- Do not get the hose scratched or squeezed with stones or a concrete for a long time. It may cause leakage or damage.
- Do not bend the hose excessively near the Cupla.
- Do not use Cupla Hose as a hoist.
- Do not use the hose near fire. It may soften or deform the hose.
- Keep the hose in a shaded, dry and well-ventilated place.
- Do not bend the urethane hose less than the minimum-bending radius of 3 cm.
- Disconnect a Cupla plug and socket while holding the plug in one hand and the socket in the other.
- After connection, try to pull the Cupla plug and socket apart to check secure connection.
- In cleaning Cuplas, do so in a manner that will not affect the seal and body material of Cuplas. (Before cleaning, consult us.)
- Do not drop Cuplas. It may reduce the performance of the Cuplas.
- Do not connect Cuplas directly to a vibrating or impact device. It may result in reduced lifetime.
- Do not use Cuplas continuously at the lowest or highest working temperature.
- Do not apply any excessive bending, tension or rotation to Cuplas. It may cause leakage or damage.
- Dirt, scratches or damages on the sealing surface may cause leakage.
- The inclusion of foreign matter in the fluid to be used may cause malfunction. Fluid must be cleaned through filters before reaching to Cuplas.
- Do not strike the tip of an automatic shut-off valve with a hammer or a similar tool. It may cause leakage or malfunction. Consult us for an alternative way of releasing the residual pressure.

### Cupla for Oxygen / Fuel Gas

#### ⚠ Warning

- Fluid must flow from socket to plug.
- Use a thread sealant on the male taper pipe thread to ensure no leakage.
- Do not exceed the recommended maximum torque when screwing in to the male or female thread of a Cupla for installation. It may cause damage.
- The fluid to be used must be compatible with the body and seal materials of Cupla.
- Only use Cuplas with a combination of Nitto Cuplas.
- Do not use Cuplas continuously exceeding the rated working pressure.
- Only use Cuplas within the range of the rated temperature. Otherwise the seal may get damaged or deteriorate and cause leakage.
- Do not apply any excessive impact, bend or tension more than is necessary to connect or disconnect Cuplas. It may cause leakage or damage.
- Do not use Cuplas in a place where dust or metal dust gets in. It may cause malfunction or leakage.
- May cause malfunction or leakage if paint sticks to Cuplas.
- Do not use the Cupla in a place where gas is likely to build up.
- Do not connect or disconnect the Cupla near fire.
- Replace the Cupla with a new one if it caused a backfire.
- Never use any oil when assembling the Cupla to a hose. It may cause spontaneous fire.
- Cut off the hose at least 3 cm from the end when the hose is re-used.
- Do not strike the tip of an automatic shut-off valve with a hammer or a similar tool. It may cause leakage or malfunction. Consult us for an alternative way of releasing the residual pressure.

#### ⚠ Caution

- Only use Cuplas as quick connecting fluid couplings.
- Insert a hose right to the end of the hose barb and secure it tightly with hose clamps.
- Keep Cuplas indoors away from water or moisture.
- Do not use a hose with cracks. It may cause leakage or accidental disconnection.
- Always check for leakage on Cuplas before use. Never use the Cupla with leak. Replace it with a new one.
- Make sure that the valve on the torch is closed before connecting a Cupla to the torch.
- In cleaning Cuplas, do so in a manner that will not affect the seal and body material of Cuplas. (Before cleaning, consult us.)
- Do not drop Cuplas. Dropping may reduce the performance of the Cuplas.
- Do not connect Cuplas directly to a vibrating or impact device. It may result in reduced lifetime.
- Do not use Cuplas continuously at the lowest or highest working temperature.
- Do not apply any excessive bending, tension or rotation to Cuplas. It may cause leakage or damage.
- Dirt, scratches or damages on the sealing surface may cause leakage.
- The inclusion of foreign matter in the fluid to be used may cause malfunction. Fluid must be cleaned through filters before reaching to Cuplas.

### Mold Cupla / Flow Meter

#### ⚠ Caution

- The fluid to be used must be compatible with the body and seal material of Cupla.
- Do not use Cuplas continuously exceeding the rated working pressure.
- Only use Cuplas within the range of the rated temperature. Otherwise the seal may get damaged or deteriorate and cause leakage.
- Do not apply any excessive impact, bend or tension more than is necessary to connect or disconnect Cuplas. It may cause leakage or damage.
- Do not use Cuplas in a place where dust or metal dust gets in. It may cause malfunction or leakage.
- May cause malfunction or leakage if paint sticks to Cuplas.
- Do not exceed the recommended maximum torque when screwing in to the male or female thread of a Cupla for installation. It may cause thread damage.
- Do not use a hose with cracks. It may cause leakage or accidental disconnection.
- Do not connect Cuplas directly to a vibrating or impact device. It may result in reduced lifetime.
- The inclusion of foreign matter in the fluid to be used may cause malfunction. Fluid must be cleaned through filters before reaching to Cuplas.
- Do not disassemble Cuplas.
- Disconnect a Cupla plug and socket while holding the plug in one hand and the socket in the other.
- After connection, try to pull the Cupla plug and socket apart to check secure connection.
- Selecting the wrong type of seal material may cause leakage. In making your selection, check the compatibility of seal and body material with the type of fluid and temperature. As to the use of any special paint or solvent, make thoroughly sure of the material compatibility.
- In cleaning Cuplas, do so in a manner that will not affect the seal and body material of Cuplas. (Before cleaning, consult us.)
- Do not drop Cuplas. It may reduce the performance of the Cuplas.
- Do not use Cuplas continuously at the lowest or highest working temperature.
- Do not apply any excessive bending, tension or rotation to Cuplas. It may cause leakage or damage.
- Dirt, scratches or damages on the sealing surface may cause leakage.
- Do not strike the tip of an automatic shut-off valve with a hammer or a similar tool. It may cause leakage or malfunction. Consult us for an alternative way of releasing the residual pressure.



## Precautions Relating to the Use of All Cuplas

- Be sure to read the "Instruction Sheet" that comes with the product or "Caution" on the package before use.

### Cupla for Low Pressure (Water, Liquid) and for Medium Pressure

#### Warning

- The fluid to be used must be compatible with the body and seal material of Cupla.
- Do not use Cuplas continuously exceeding the rated working pressure.
- Only use Cuplas within the range of the rated temperature. Otherwise the seal may get damaged or deteriorate and cause leakage.
- Do not apply pressure to a Cupla socket or plug while they are disconnected.
- Do not disassemble Cuplas.

#### Caution

- Use a thread sealant on the male taper pipe thread to ensure no leakage.
- Do not exceed the recommended maximum torque when screwing in to the male or female thread of a Cupla for installation. It may cause thread damage.
- Only use Cuplas as quick connecting fluid couplings.
- Only use Cuplas with a combination of Nitto Cuplas. (Except Lever Lock Cupla)
- Do not apply any excessive impact, bend or tension more than is necessary to connect or disconnect Cuplas. It may cause leakage or damage.
- Do not use Cuplas in a place where dust or metal dust gets in. It may cause malfunction or leakage.
- May cause malfunction or leakage if paint sticks to Cuplas.
- Install a shut-off valve between the pressure source and Cuplas.
- Do not use Cuplas as a swivel joint.
- Do not connect Cuplas directly to a vibrating or impact device. It may result in reduced lifetime.
- The inclusion of foreign matter in the fluid to be used may cause malfunction. Fluid must be cleaned through filters before reaching to Cuplas.
- Make sure that O-rings and Packing seals are lubricated at all times.
- Do not strike the tip of an automatic shut-off valve with a hammer or a similar tool. It may cause leakage or malfunction. Consult us for an alternative way of releasing the residual pressure.
- Selecting the wrong type of seal material may cause leakage. In making your selection, check the compatibility of seal and body material with the type of fluid and temperature. As to the use of any special paint or solvent, make sure the compatibility thoroughly.
- In cleaning Cuplas, do so in a manner that will not affect the seal and body material of Cuplas. (Before cleaning, consult us.)
- Do not drop Cuplas. It may reduce the performance of the Cuplas.
- Do not use Cuplas continuously at the lowest or highest working temperature.
- Do not apply any excessive bending, tension or rotation to Cuplas. It may cause leakage or damage.
- Dirt, scratches or damages on the sealing surface may cause leakage.
- Put a Nitto genuine dust cap on the plug after disconnection when there is a possibility of dirt sticking to the plug seal surface.

### Cuplas for High Pressure

#### Warning

- The fluid to be used must be compatible with the body and seal material of Cupla.
- Do not use Cuplas continuously exceeding the rated working pressure.
- Only use Cuplas within the range of the rated temperature. Otherwise the seal may get damaged or deteriorate and cause leakage.
- Do not connect or disconnect Cuplas while they are pressurized or residual pressure remains (Except HSP-PV type).
- Do not apply pressure to a Cupla socket or plug while they are disconnected.
- Do not disassemble Cuplas.

#### Caution

- Use a thread sealant on the male taper pipe thread to ensure no leakage.
- Do not exceed the recommended maximum torque when screwing in to the male or female thread of a Cupla for installation. It may cause thread damage.
- Only use Cuplas as quick connecting fluid couplings.
- Only use Cuplas with a combination of Nitto Cuplas.
- Do not apply any excessive impact, bend or tension more than is necessary to connect or disconnect Cuplas. It may cause leakage or damage.
- Do not use Cuplas in a place where dust or metal dust gets in. It may cause malfunction or leakage.
- May cause malfunction or leakage if paint sticks to Cuplas.
- Install a shut-off valve between the pressure source and Cuplas.
- Do not use Cuplas as a swivel joint.
- Do not connect Cuplas directly to a vibrating or impact device. It may result in reduced lifetime.
- Do not use 280 Type Cupla with water-glycol operating oil which could dissolve zinc plating.
- Contact us when using Cuplas for high pressure gases.
- The inclusion of foreign matter in the fluid to be used may cause malfunction. Fluid must be cleaned through filters before reaching to Cuplas.
- Make sure that O-rings and Packing seals are lubricated at all times.
- Do not flow fluid through Cuplas at the speed of more than 8 m/s.
- Do not strike the tip of an automatic shut-off valve with a hammer or a similar tool. It may cause leakage or malfunction. Consult us for an alternative way of releasing the residual pressure.
- Use a seal and body material suitable to the fluid referring to the pages of Seal Material and Body Material Selection Tables at the end of the catalog.
- In cleaning Cuplas, do so in a manner that will not affect the seal and body material of Cuplas. (Before cleaning, consult us.)
- Do not drop Cuplas. It may reduce the performance of the Cuplas.
- Do not use Cuplas continuously at the lowest or highest working temperature.
- Do not apply any excessive bending, tension or rotation to Cuplas. It may cause leakage or damage.
- Dirt, scratches or damages on the sealing surface may cause leakage.
- Put a Nitto genuine dust cap on the plug after disconnection when there is a possibility of dirt sticking to the plug seal surface.

### Multi Cupla Series

#### Overall Multi Cuplas

##### Warning

- Do not use Cuplas continuously exceeding the rated working pressure.
- Only use Cuplas within the range of the rated temperature. Otherwise the seal may get damaged or deteriorate and cause leakage.
- Do not disassemble Cuplas.

##### Caution

- Do not exceed the recommended maximum torque when screwing in to the male or female thread of a Cupla for installation. It may cause damage.
- Do not apply any excessive impact, bend or tension more than is necessary to connect or disconnect Cuplas. It may cause leakage or damage.
- Do not use Cuplas in a place where dust or metal dust gets in. It may cause malfunction or leakage.
- Only use Cuplas as quick connecting fluid couplings.
- Do not connect Cuplas directly to a vibrating or impact device. It may result in reduced lifetime.
- The inclusion of foreign matter in the fluid to be used may cause malfunction. Fluid must be cleaned through filters before reaching to Cuplas.
- Do not strike the tip of an automatic shut-off valve with a hammer or a similar tool. It may cause leakage or malfunction.
- Do not flow fluid through Cuplas at the speed of more than 8 m/s.
- Install a shut-off valve between the pressure source and Cuplas.
- Only use Cuplas with a combination of Nitto Cuplas.
- Check up on Cuplas periodically. Stop using Cuplas if malfunction is found.
- Selecting the wrong type of seal material may cause leakage. In making your selection, check the compatibility of seal and body material with the type of fluid and temperature. As to the use of any special paint or solvent, make thoroughly sure of the material compatibility.
- In cleaning Cuplas, do so in a manner that will not affect the seal and body material of Cuplas. (Before cleaning, consult us.)
- Do not use Cuplas continuously at the lowest or highest working temperature.
- Do not apply any excessive bending, tension or rotation to Cuplas. It may cause leakage or damage.
- Dirt, scratches or damages on the sealing surface may cause leakage.

#### MAM Type

##### Warning

- Do not drop Multi Cuplas. It may cause deformation of the plate.

##### Caution

- Make sure that the lever is in the "connect" position, and securely connect socket and plug.
- Do not force turning the lever. This may cause breakage.
- Install hoses symmetrically from the locking unit when they are connected to the Cuplas in order to distribute the reaction force evenly.
- Use a thread sealant on the male taper pipe thread to ensure no leakage.
- Make sure that O-rings and Packing seals are lubricated at all times.

#### MAM-A Type / MAM-B Type

##### Warning

- Do not connect or disconnect Cuplas while they are pressurized or residual pressure of more than 0.6 MPa remains. It could lead to damage on the Cuplas.
- Do not drop Multi Cuplas. It may cause deformation of the plate.

##### Caution

- Make sure that the lever is in the "connect" position, and securely connect socket and plug.
- Do not force turning the lever. This may cause breakage.
- When replacing a Cupla from the plate, carefully remove the C type retaining ring by using a pair of snap ring pliers. Make sure not to expand the C type retaining ring too much. It is recommended that a new C type retaining ring should be used when a Cupla is replaced.
- Install Cuplas symmetrically from the locking unit when they are connected to the plate in order to distribute the reaction force evenly.
- Make sure that O-rings and Packing seals are lubricated at all times.

#### MAS Type / MAT Type

##### Warning

- Do not connect or disconnect sockets and plugs while they are pressurized.
- Match the lateral side of the hexagon shaped body part of the socket to that of the plug when they are connected.
- Do not exceed more than 0.6 mm diameter for the axial eccentricity when a socket and a plug are connected. It may cause leakage or breakage.

##### Caution

- Do not connect MAT type each other since there is no allowance for eccentricity.
- Make sure that O-rings and Packing seals are lubricated at all times.
- Do not drop Cuplas. It may reduce the performance of the Cuplas.

#### MALC-SP Type

##### Danger

- Do not apply pressure more than 2 MPa to a Cupla socket or plug while they are disconnected. It may cause the valve to pop out.

##### Warning

- Do not exceed more than 2 mm diameter for the axial eccentricity. It may cause leakage or breakage.
- Do not exceed more than 0.5 degree for the angle of inclination during connection or disconnection. It may cause leakage or breakage.

##### Caution

- Make sure that O-rings and Packing seals are lubricated at all times.
- Do not drop Cuplas. It may reduce the performance of the Cuplas.

#### MALC-HSP Type

##### Danger

- Do not apply pressure more than 8 MPa to a Cupla socket or plug while they are disconnected. It may cause the valve to pop out.

##### Warning

- Do not exceed more than 2 mm diameter for the axial eccentricity. It may cause leakage or breakage.
- Do not exceed more than 0.5 degree for the angle of inclination during connection or disconnection. It may cause leakage or breakage.

##### Caution

- Make sure that O-rings and Packing seals are lubricated at all times.
- Do not drop Cuplas. It may reduce the performance of the Cuplas.

# Safety Guide



## Precautions Relating to the Use of All Cuplas

- Be sure to read the "Instruction Sheet" that comes with the product or "Caution" on the package before use.

### Semicon Cupla Series

#### ⚠ Caution

- Prior to an initial use, the seal material should be tested to confirm the material suitability for the fluid.
- Use a thread sealant on the male taper pipe thread to ensure no leakage.
- The O-ring of a Cupla socket is normally greased to reduce the friction resistance (insertion load) that occurs when a plug is inserted to a socket. The Semicon Cupla, however, are grease-free Cuplas to prevent grease entering into fluid system. To reduce the friction resistance (insertion load) and protect the O-ring, apply the small amount of the fluid to be run or pure water to the O-ring or the part of the plug where the O-ring comes in contact, before using.
- Small amount of fluid will spill out on the disconnection. In order to avoid any unexpected danger, drain the fluid inside the Cupla with compressed air before disconnection.
- Do not use Cuplas as a swivel joint.
- Only use Cuplas as quick connecting fluid couplings.
- Do not apply any excessive impact, bend or tension more than is necessary to connect or disconnect Cuplas. It may cause leakage or damage.
- Do not apply pressure to a Cupla socket or plug while they are disconnected.
- Be sure to mount a proper dust cap while Cuplas are left disconnected.
- Do not disassemble Cuplas.
- Selecting the wrong type of seal material may cause leakage. In making your selection, check the compatibility of seal and body material with the type of fluid and temperature. As to the use of any special paint or solvent, make thoroughly sure of the material compatibility.
- In cleaning Cuplas, do so in a manner that will not affect the seal and body material of Cuplas. (Before cleaning, consult us.)
- Do not drop Cuplas. It may reduce the performance of the Cuplas.
- Do not connect Cuplas directly to a vibrating or impact device. It may result in reduced lifetime.
- Do not use Cuplas continuously at the lowest or highest working temperature.
- Do not apply any excessive bending, tension or rotation to Cuplas. It may cause leakage or damage.
- Dirt, scratches or damages on the sealing surface may cause leakage.
- The inclusion of foreign matter in the fluid to be used may cause malfunction. Fluid must be cleaned through filters before reaching to Cuplas.
- Do not strike the tip of an automatic shut-off valve with a hammer or a similar tool. It may cause leakage or malfunction. Consult us for an alternative way of releasing the residual pressure.

### Paint Cupla

#### ⚠ Warning

- Do not use Cuplas continuously exceeding the rated working pressure.
- Only use Cuplas within the range of the rated temperature. Otherwise the seal may get damaged or deteriorate and cause leakage.
- The fluid to be used must be compatible with the body and seal material of Cupla.
- Check the compatibility of the seal and body material with the type of fluid and temperature before use. As to the use of any special paint or solvent, make thoroughly sure of the material compatibility.
- Make sure that a hose containing a ground wire is connected to a ground. Insufficient grounding may lead to fire or dangerous explosion caused by possible sparks of static electricity.
- Wear appropriate clothes and protective equipment such as safety glasses, face guard and gloves at all times. Otherwise it could be potentially hazardous when paint or solvent splashes on to operators.
- Do not disassemble Cuplas.

#### ⚠ Caution

- This Cupla is designed for paints diluted by solvents. Do not use this Cupla for any other application.
- Do not exceed the recommended maximum torque when screwing in to the male or female thread of a Cupla for installation. It may cause damage.
- Do not apply any excessive impact, bend or tension more than is necessary to connect or disconnect Cuplas. It may cause leakage or damage.
- Do not use Cuplas as a swivel joint.
- The inclusion of foreign matter in the fluid to be used may cause malfunction. Fluid must be cleaned through filters before reaching to Cuplas.
- Install a shut-off valve between the pressure source and Cuplas.
- Do not connect other maker's plug to our socket. It could cause leakage or damage on the Cuplas.
- Only use Cuplas with a combination of Nitto Cuplas.
- Be careful with the fluid that will spill out from the plug when disconnected.
- Clean Cuplas each time after use. Otherwise paint will dry out and may cause malfunction, insufficient color mix or poor grounding.
- Check up on Cuplas periodically. Stop using Cuplas if malfunction is found.
- Fluid must flow from socket to plug.
- Do not drop Cuplas. It may reduce the performance of the Cuplas.
- Do not connect Cuplas directly to a vibrating or impact device. It may result in reduced lifetime.
- Do not use Cuplas continuously at the lowest or highest working temperature.
- Do not apply any excessive bending, tension or rotation to Cuplas. This may cause leakage or damage.
- Dirt, scratches or damages on the sealing surface may cause leakage.

### Cupla for Inert Gas

#### ⚠ Warning

- Do not use Cuplas continuously exceeding the rated working pressure.
- Only use Cuplas within the range of the rated temperature. Otherwise the seal may get damaged or deteriorate and cause leakage.
- Do not apply any excessive impact, bend or tension more than is necessary to connect or disconnect Cuplas. It may cause leakage or damage.
- Do not connect or disconnect Cuplas while they are pressurized or residual pressure remains
- Do not disassemble Cuplas.

#### ⚠ Caution

- Use a thread sealant on the male taper pipe thread to ensure no leakage.
- The fluid to be used must be compatible with the body and seal material of Cupla.
- Only use Cuplas as quick connecting fluid couplings.
- Only use Cuplas with a combination of Nitto Cuplas.
- Do not use Cuplas in a place where dust or metal dust gets in. It may cause malfunction or leakage.
- May cause malfunction or leakage if paint sticks to Cuplas.
- Install a shut-off valve between the pressure source and Cuplas.
- Do not use Cuplas as a swivel joint.
- Do not connect Cuplas directly to a vibrating or impact device. It may result in reduced lifetime.
- Selecting the wrong type of seal material may cause leakage. In making your selection, check the compatibility of seal and body material with the type of fluid and temperature. As to the use of any special paint or solvent, make thoroughly sure of the material compatibility.
- In cleaning Cuplas, do so in a manner that will not affect the seal and body material of Cuplas.
- Do not drop Cuplas. It may reduce the performance of the Cuplas.
- Do not use Cuplas continuously at the lowest or highest working temperature.
- Do not exceed the recommended maximum torque when screwing in to the male or female thread of a Cupla for installation. It may cause thread damage.
- Do not apply any excessive bending, tension or rotation to Cuplas. It may cause leakage or damage.
- Dirt, scratches or damages on the sealing surface may cause leakage.
- The inclusion of foreign matter in the fluid to be used may cause malfunction. Fluid must be cleaned through filters before reaching to Cuplas.
- Do not strike the tip of an automatic shut-off valve with a hammer or a similar tool. It may cause leakage or malfunction. Consult us for an alternative way of releasing the residual pressure.
- Put a Nitto genuine dust cap on the plug after disconnection when there is a possibility of dirt sticking to the plug seal surface.

### Semi-Standard Cupla Series

#### ⚠ Caution

- Only use Cuplas as quick connecting fluid couplings.
- The fluid to be used must be compatible with the body and seal material of Cupla.
- Only use Cuplas with a combination of Nitto Cuplas.
- Do not use Cuplas continuously exceeding the rated working pressure.
- Only use Cuplas within the range of the rated temperature. Otherwise the seal may get damaged or deteriorate and cause leakage.
- Do not exceed the recommended maximum torque when screwing in to the male or female thread of a Cupla for installation. It may cause thread damage.
- Do not apply any excessive impact, bend or tension more than is necessary to connect or disconnect Cuplas. It may cause leakage or damage.
- Do not connect Cuplas directly to a vibrating or impact device. It may result in reduced lifetime.
- Do not use Cuplas in a place where dust or metal dust gets in. It may cause malfunction or leakage.
- May cause malfunction or leakage if paint sticks to Cuplas.
- Do not disassemble Cuplas.
- Selecting the wrong type of seal material may cause leakage. In making your selection, check the compatibility of seal and body material with the type of fluid and temperature. As to the use of any special paint or solvent, make thoroughly sure of the material compatibility.
- In cleaning Cuplas, do so in a manner that will not affect the seal and body material of Cuplas. (Before cleaning, consult us.)
- Do not drop Cuplas. It may reduce the performance of the Cuplas.
- Do not use Cuplas continuously at the lowest or highest working temperature.
- Do not apply any excessive bending, tension or rotation to Cuplas. It may cause leakage or damage.
- The inclusion of foreign matter in the fluid to be used may cause malfunction. Fluid must be cleaned through filters before reaching to Cuplas.
- Do not strike the tip of an automatic shut-off valve with a hammer or a similar tool. It may cause leakage or malfunction.

# Maintenance of Cuplas

Cuplas should be inspected periodically to ensure safe operation and to prevent them from a performance drop or malfunction. If there is a malfunction in the Cupla or wear and tear, please replace it with a new one. If you have any concerns, contact Nitto Kohki or the distributor from whom you purchased your Cupla.

## O-ring Replacement Procedure

The internal O-ring is a consumable item. If the O-ring in the socket has failure such as wear and tear or deterioration, take the following steps to replace it with a new one. Always use genuine Nitto O-rings.

### Accessories for O-ring maintenance

#### Grease for O-ring

- GRE-M1 (Mineral oil) for NBR and FKM
- GRE-SI (Hydrocarbon oil) for NBR and FKM
- GRE-HC1 (Silicon oil) for NBR, FKM, and EPDM



#### O-ring replacement Jig


● PMJ-1 (Small)



● PMJ-2 (Large)

### How to Remove the O-ring

- 1 Use an optional O-ring replacement Jig to remove the O-ring. Be careful not to damage the groove of O-ring with the jig. Used O-rings with wear and tear or deterioration can be removed easily with the jig.

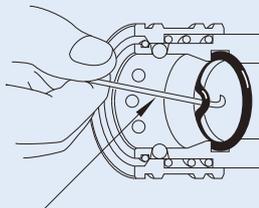


O-ring replacement Jig

- 2 After removing the O-ring, wipe the groove clean with a cloth.

### How to Install a New O-ring


- 1 After making sure that no dust or foreign matter exists in the groove of O-ring, push in part of the O-ring and the remaining part can be easily pressed in with the jig.

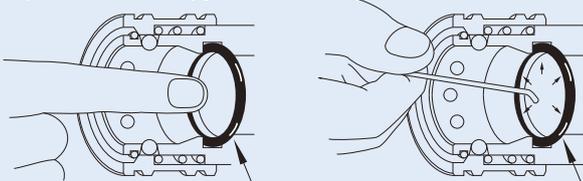

O-ring

Press the O-ring into place with the jig.

- 2 A HSP Cupla has a backup ring. Insert an O-ring in the place shown in the figure. If Cupla connection/disconnection is hard and not smooth after the O-ring has been replaced, apply a little grease to the O-ring.

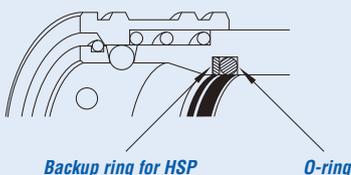

Backup ring for HSP

O-ring



### Caution for Storing Cuplas


- Store Cuplas in a place where no dust or foreign matter gets in. If fluid flows while the dust or foreign matter is present inside Cuplas, the dust or foreign matter may go into the equipment connected to the Cupla and may cause malfunction.
- Store Cuplas indoors away from water or moisture.
- Store Cuplas in a shaded, dry and well-ventilated place.
- Do not to drop Cuplas. It will deform or damage Cuplas.
- If Cuplas are stored or not being used for a long period of time, check their appearance, function and performance before use.

## Semicon Cupla SCF Type (See page 124)

### How to install a tube to the socket

#### 1 Cut the tube

Cut the tube (PFA) as shown below with a box-cutter or a knife.

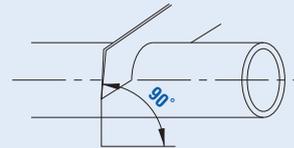


#### 2 Groove the tube

Insert the tube completely into the special jig (see the below figure.) and keep the jig's cutter blade pressed down while the tube is rotated about one and a half turns. It will give you a complete groove on the tube which is good for a ferrule mount. Special jigs to suit different tube sizes are available as indicated below.



Special jig

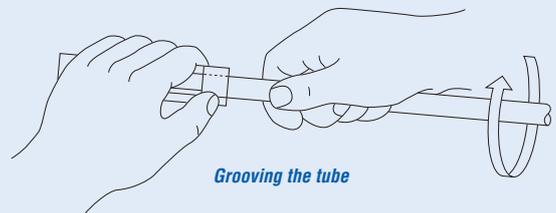

Grooving the tube


#### Special jigs

| Socket type | Tube size | Jig Model No. |
|-------------|-----------|---------------|
| SCF-2SL-N08 | ø8 x ø6   | T-8           |
| SCF-3SL-N10 | ø10 x ø8  | T-10          |

Please contact us for purchasing the jigs.

#### 3 Inserting the tube

Insert the grooved tube firmly into the Cupla. In this procedure, be careful not to take out the ferrule nut.

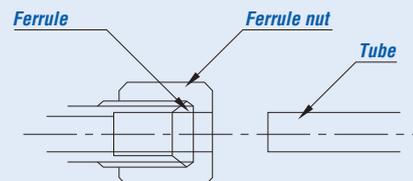

Note Ferrule position (taper facing towards Cupla)

#### 4 Tightening the nut

After lightly tightening the ferrule nut with your fingers, turn it another one and a half turns with a spanner. Be careful not to overtighten.

**CUPLA**  
Quick Connect Couplings



DISTRIBUTED BY

**LARWIND**



**Larwind Neumática, S.A.**

Polígono Arriagane Parcela 14 Alta (Boroa)  
48340 - Amorebieta - Etxano (Bizkaia) SPAIN  
Tel. +34 94 631 20 03 Fax +34 94 631 35 12  
larwind@larwind.es www.larwind.com